

**EDITION 8**



**FORUM**  
LIGHTING SOLUTIONS



Dear Customer,

Welcome to Issue 8 of the Forum Lighting catalogue.

In here you'll find approaching 500 pages of high-quality Forum light fittings, including over 200 exciting new items. This is our largest catalogue to date and reflects the strong development we're experiencing as an upcoming, trusted supplier in the lighting market. In addition to the ever-growing range of attractive and innovative lines available from Forum, our distributors can also enjoy:

- High quality items, which go through rigorous testing to maintain that our standards are always met.
- Manufacturer guarantee's ranging from 2 years on our traditional luminaires and heaters, to 3 years on our integrated LED fittings, Coastal lighting and LED compatible lighting controls.
- Comprehensive stock holding as we appreciate the crucial nature of stock availability to our distributors.
- Next day delivery (UK mainland) on orders placed before 3pm.
- Same day collection available from our warehouse facility.
- Accurate, friendly communication from our internal team of industry experienced account managers.
- Face to face meetings with our well respected group of area sales managers and sales agents.
- Support in terms of marketing, displays and promotional activity.
- An open invite to our showroom, which is regularly updated to guarantee the very latest Forum range is on show.

Throughout the 8 years following Forum's inception, we're very proud to have developed a reputation for supplying quality items and offering a high standard of service. Both of these points are fundamental to the growth of our business and will continue to be our daily focus as we strive to be the best supplier we can.

**The Forum Lighting Team**



# 1

## **ZINC** OUTDOOR & SENSORS

- Wall
- Lantern
- Ground/Deck Lights
- Post Lights
- Door Number
- Security & Floodlights
- Work Lights
- Outdoor Heating
- Switches/Sockets
- Sensors

# 2

## **COAST** OUTDOOR

- Post Lights
- Lanterns
- Bulkheads
- Wall
- Guide Lights
- Ground
- Security & Floodlights

# 3

## **ELECTRALITE** COMMERCIAL

- LED Strip
- LED Strip Accessories
- Under Cabinet
- LED Battens
- T-Grid Lighting
- Bulkheads
- Recessed/Downlights
- Emergency



# CONTENTS

4

## SPA BATHROOM

New Range  
Collections  
LED  
Spotlights  
Ceiling  
Recessed/Downlights  
Wall  
Mirrors  
Smart Toilets

5

## SPA PRO PREMIUM

Collections

6

## CULINA KITCHEN

Under Cabinet  
Kinetic Switching  
Konect Plug + Play  
Sockets/QI Charging  
Track Lighting  
LED Battens  
Plinth

7

## INLIGHT INDOOR & LED LAMPS

Plaster Lights  
Recessed/Downlights  
Spotlights  
Picture Light  
Task Lighting  
Cable Sets  
Shades  
LED Lamps

8

## STANLEY SITE LIGHTING

Portable  
Festoon

9

## INFO

Marketing  
Lighting Terms  
Colour Temp Guide  
IP Rating  
Bathroom Zoning  
Index



# OUTDOOR

Domestic external lighting in both modern and traditional designs. Including ZINC Radiant Heaters, suitable for domestic or commercial applications are extremely efficient and effective. We also offer a range of LED compatible PIR, photocell and microwave sensors.

WALL	008-051
LANTERN	052-085
GROUND/DECK LIGHTS	088-095
POST LIGHTS	086-089
DOOR NUMBER	096-097
SECURITY & FLOODLIGHTS	098-107
WORK LIGHTS	108-111
OUTDOOR HEATING	112-135
SOCKETS/SWITCHES	136-137
SENSORS	138-157



IP44



- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Comes in 6 different finishes
- PIR & Photocell versions available



ZN-20941-SST



ZN-20941-POLSST



ZN-20941-BLK



ZN-20941-COP



ZN-20941-ANTH



ZN-20941-WHT

# LETO

Up/Down Wall Light



IP44 Rated



Class 1



0.57kg



Available in 6 colour options

Code	Finish	Description	Lamp	Dimensions
ZN-20941-SST	Stainless Steel	Leto Up/Down Wall Light	2 x 7W max LED GU10	H:160mm W:60mm Proj:110mm
ZN-20941-POLSST	Polished Stainless			
ZN-20941-BLK	Black			
ZN-20941-WHT	White			
ZN-20941-ANTH	Anthracite			
ZN-20941-COP	Copper			



IP44



ZN-29179-BLK



ZN-29179-ANTH



ZN-29179-COP

- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Adjustable lux, sensitivity and timer
- Up to 8m detection distance
- Comes in 4 different finishes

# LETO

Up/Down Wall Light with PIR



PIR Sensor




IP44 Rated



Class 1



0.8kg



Available in 4 colour options

Code	Finish	Description	Lamp	Dimensions
ZN-29179-SST	Stainless Steel	Leto Up/Down Wall Light with PIR	2 x 7W max LED GU10	H:215mm W:68mm Proj:107mm
ZN-29179-BLK	Black			
ZN-29179-ANTH	Anthracite			
ZN-29179-COP	Copper			



IP44



ZN-34022-SST



ZN-34022-BLK

- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Photocell sensor
- Available in 2 finishes

# LETO

Up/Down Wall Light with Photocell Sensor



Code	Finish	Description	Lamp	Dimensions
ZN-34022-SST	Stainless Steel	Leto Up/Down Wall Light with Photocell	2 x 7W max LED GU10	H:215mm W:68mm Proj:107mm
ZN-34022-BLK	Black			



NEW

IP44



ZN-37939-BLK



ZN-37939-SST



ZN-37939-ANTH



ZN-37939-WHT



ZN-37939-COP

- Outdoor ceiling light ideal for porches
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

## LETO Porch Light



Class 1



0.4kg



Available in  
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37939-BLK	Leto Porch Light	Black	1 x 7W max LED GU10	H:103mm Dia:60mm
ZN-37939-SST		Stainless Steel		
ZN-37939-ANTH		Anthracite		
ZN-37939-WHT		White		
ZN-37939-COP		Copper		

**NEW**

**IP44**



ZN-37938-BLK



ZN-37938-SST



ZN-37938-ANTH



ZN-37938-WHT




ZN-37938-COP

- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

# LETO

Up or Downlight with PIR Sensor



Available in 5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37938-BLK	Leto Up or Downlight	Black	1 x 7W max LED GU10	H:118mm W:86mm Proj:105.5mm
ZN-37938-SST		Stainless Steel		
ZN-37938-ANTH		Anthracite		
ZN-37938-WHT		White		
ZN-37938-COP		Copper		

**NEW**

**IP44**



ZN-37940-BLK



ZN-37940-SST



ZN-37940-ANTH



ZN-37940-WHT



ZN-37940-COP

- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

# LETO

Up or Downlight



Class 1



0.4kg



Available in 5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37940-BLK	Leto Up or Downlight	Black	1 x 7W max LED GU10	H:118mm W:86mm Proj:105.5mm
ZN-37940-SST		Stainless Steel		
ZN-37940-ANTH		Anthracite		
ZN-37940-WHT		White		
ZN-37940-COP		Copper		





IP44



- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Comes in 4 different finishes



ZN-26536-BLK



ZN-26536-WHT



ZN-26536-COP

# LETO

## Adjustable Spotlight



PIR Sensor




IP44 Rated



Class 1



0.46kg



Available in 4 colour options

Code	Finish	Description	Lamp	Dimensions
ZN-26536-SST	Stainless Steel	Leto Adjustable Spotlight	1 x 7W max LED GU10	H:144mm W:60mm Proj:89mm
ZN-26536-BLK	Black			
ZN-26536-WHT	White			
ZN-26536-COP	Copper			



IP44



ZN-29180-SST



ZN-29180-BLK

- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Screw in spike or deck mount included
- Available in 2 finishes

## LETO

Dual Mount Ground Spotlight

IP44 Rated | Class 1 | 0.5kg

Code	Finish	Description	Lamp	Dimensions
ZN-29180-SST	Stainless Steel	Leto Dual Mount Spotlight	2 x 7W max LED GU10	H:215mm W:60mm Proj:107mm
ZN-29180-BLK	Black			

IP44



ZN-34018-SST

- IP44 rated
- Constructed from [304] stainless steel and clear glass
- Available in 2 finishes



ZN-34018-BLK

# LETO

## Adjustable Twin Spotlight

 IP44 Rated
  Class 1
  0.81kg

Code	Finish	Description	Lamp	Dimensions
ZN-34018-SST	Stainless Steel	Leto Adjustable Twin Spotlight	2 x 7W max LED GU10	H:215mm W:68mm Proj:107mm
ZN-34018-BLK	Black			

IP44



- IP44 rated
- Die-cast aluminium construction

## NEVIS Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-35740-BLK	Black	Nevis Downlight	1 x 7W max LED GU10	H:120mm W:110mm Proj:155mm

**NEW**


**700  
Lumens**


**IP65**





- Die-cast aluminium construction
- Opal diffuser
- 12W LED module (SMD)
- K: 4000
- Lm: 700
- Lm/W: 58

## **CORTE** Wall Light

 IP65  
Rated

 4000K  
CW

 Class 1

 0.7kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38634-BLK	Black	<b>NEW</b>	Corte Wall Light	12W	4000k	700	H:115mm W:165mm Proj:210mm



**NEW**

**700  
Lumens**

**IP54**



- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 5.4W COB LED
- K: 4000
- Lm: 700
- Lm/W: 130


## REIMS Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38637-BLK	Black	<b>NEW</b>	Reims Wall Light	5.4W	4000k	700	H:55mm W:95mm Proj:120mm

900  
Lumens

IP65

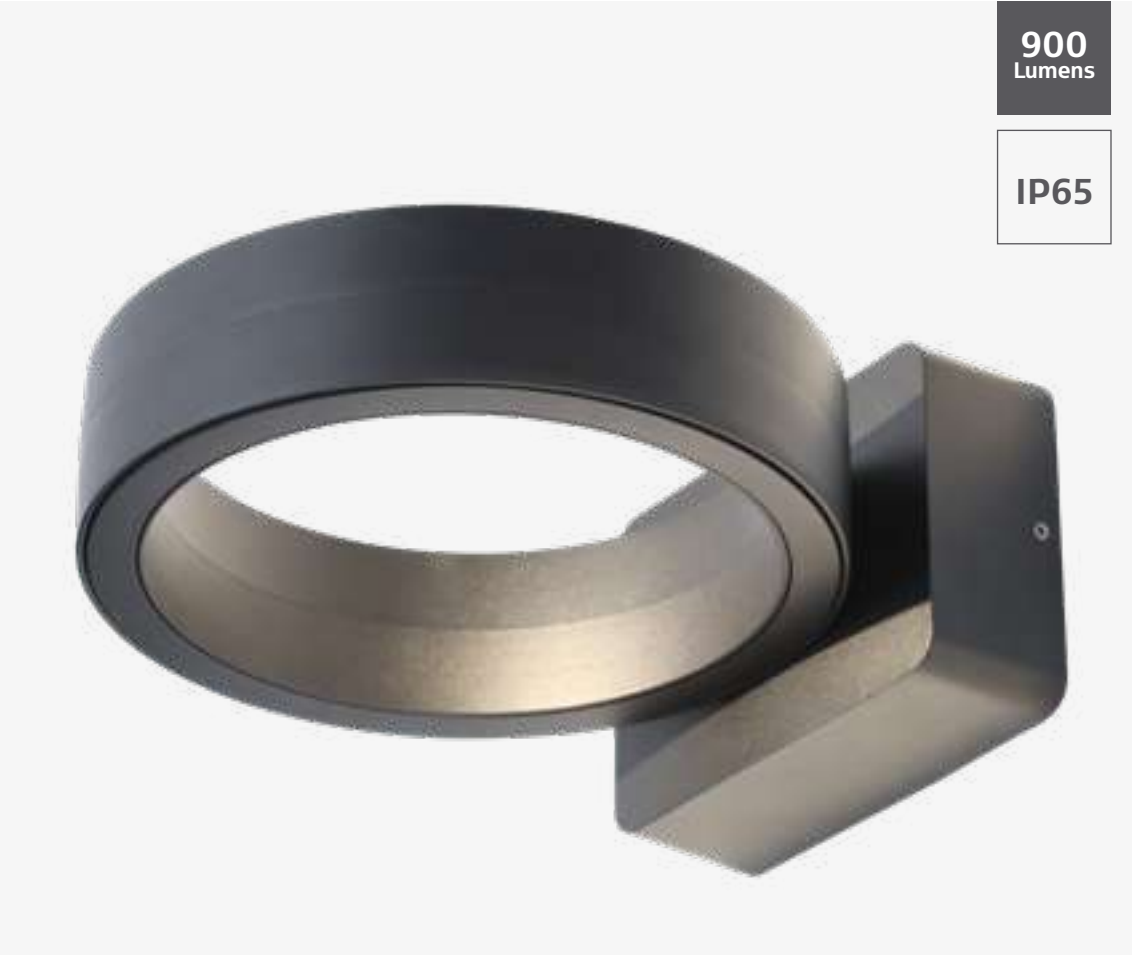

- Die-cast aluminium construction
- Opal diffuser
- 16W COB LED
- K: 4000
- Lm: 900
- Lm/W: 56.25

# KITT

LED Halo Wall Light

IP65 Rated | 4000K CW | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35739-BLK	Black	Kitt LED Halo Wall Light	16W	4000k	900	56.25	H:90mm W:200mm Proj:243

700 Lumens

IP65



Ground Spike Light

Spotlight






3 Different Mounting Options

Wall Light

- Die-cast aluminium construction
- Includes ground spike
- 12W COB LED
- K: 4000
- Lm: 700
- Lm/W: 58

# GORDA

LED Spotlight with Ground Spike

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35741-BLK	Black	Gorda LED Spotlight	12W	4000k	700	58	H:235mm W:95mm Proj:160mm

620  
Lumens

IP54



- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

## MAUI

LED Up/Down Wall Light

IP54 Rated | 4000K CW | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29995-BLK	Black	Maui LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:98mm

620  
Lumens

IP54



- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

## HANA

LED Up/Down Wall Light



IP54  
Rated

4000K  
CW

Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29996-BLK	Black	Hana LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:98mm

620  
Lumens

IP54



- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5

# MANU

LED Up/Down Wall Light

IP54 Rated | 4000K CW | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29993-BLK	Black	Manu Up/Down LED Wall Light	8W	4000k	620	77.5	H:123mm W:130mm Proj:70mm



NEW

IP44



- Die-cast aluminium construction
- Polycarbonate diffuser

## SENS

Angled Wall Light



Code	Description	Finish		Lamp	Dimensions
ZN-38631-BLK	Sens Angled Wall Light	Black	<b>NEW</b>	1 x 7W max LED GU10	Proj:90mm W:100mm H:180mm

Upto  
**400**  
Lumens

**2**  
SIZES  
AVAILABLE

**IP54**



- Die-cast aluminium construction
- Wall mounted

**6W LED**

- K: 4000
- Lm: 275
- Lm/W: 45

**12W LED**

- K: 4000
- Lm: 400
- Lm/W: 33

# STROUD

LED Up/Down Wall Light

IP54 Rated | 4000K CW | Class 1

Code	Description	Lamp	Lumen	Dimensions
ZN-31768-BLK	Stroud Small LED Up/Down Wall Light	6W LED	275	H:90mm W:220mm Proj:77mm
ZN-31767-BLK	Stroud Large LED Up/Down Wall Light	12W LED	400	H:120mm W:300mm Proj:90mm

**NEW**

**280  
Lumens**


**IP54**



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 28

## RENNES

LED Guide/Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38622-ANTH	Anthracite	<b>NEW</b>	Rennes LED Guide/Wall Light	10W	4000k	280	H:130mm W:180mm Proj:90mm
ZN-38622-BLK	Black	<b>NEW</b>					
ZN-38622-WHT	White	<b>NEW</b>					

**NEW**

**500  
Lumens**

**IP54**



- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 50

## PAU Bulkhead



IP54  
Rated



4000K  
CW



Class 1



0.5kg



Available in  
3 colour options

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38621-ANTH	Anthracite	<b>NEW</b>	Pau Bulkhead	10W	4000k	500	H:108mm W:220mm Proj:125mm
ZN-38621-BLK	Black	<b>NEW</b>					
ZN-38621-WHT	White	<b>NEW</b>					

NEW

IP43



• PIR sensor option available

## VESOUL

Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-38623-ANTH	Vesoul Wall Light	NEW		
ZN-38624-ANTH	Vesoul Wall Light with PIR sensor	NEW	1 x 7W max LED GU10	Proj:95mm W:137mm H:180mm

IP44



- IP44 rated
- Available in 2 finishes

# ANTAR

Up/Down Light

IP44 Rated | Class 1 | 0.44kg

Code	Finish	Description	Lamp	Dimensions
ZN-20930-BLK	Black	Antar Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:68mm H:150mm
ZN-20930-SST	Stainless Steel			

IP44



- IP44 rated
- Available in 2 finishes

# ANTAR

Downlight

IP44 Rated | Class 1 | 0.3kg

Code	Finish	Description	Lamp	Dimensions
ZN-29181-BLK	Black	Antar Downlight	1 x 7W max LED GU10	Proj:81mm W:68mm H:92mm
ZN-29181-SST	Stainless Steel			



IP44



- IP44 rated
- Available in 2 finishes

# FLEET

Square Up/Down Light

 IP44 Rated | 
  Class 1 | 
  0.56kg

Code	Finish	Description	Lamp	Dimensions
ZN-31759-ANTH	Anthracite	Fleet Square Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:92mm H:150mm
ZN-31759-POLALU	Polished Aluminium			

IP44



- IP44 rated
- Available in 2 finishes


# FLEET

Square Downlight

IP44 Rated | Class 1 | 0.36kg

Code	Finish	Description	Lamp	Dimensions
ZN-31758-ANTH	Anthracite	Fleet Square Downlight	1 x 7W max LED GU10	Proj:92mm W:68mm H:81mm
ZN-31758-POLALU	Polished Aluminium			

IP44

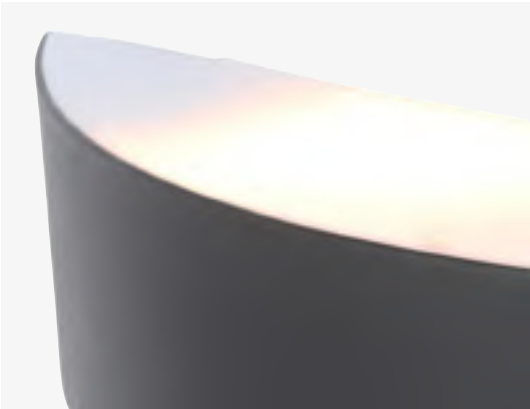

- IP44 rated
- Die-cast aluminium construction

# MOKU

Up/Down Wall Light

 IP44 Rated |  Class 1

Code	Finish	Description	Lamp	Dimensions
ZN-29992-BLK	Black	Moku Up/Down Wall Light	1 x 9W LED Max E27 GLS	H:94mm W:360mm Proj:78mm

NEW

480  
Lumens

IP54



- Aluminium body with glass diffuser
- 9W LED module (SMD)
- K: 4000
- Lm: 480
- Lm/W: 53

## CANNES

Linear Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38636-ANTH	Anthracite	NEW	Cannes LED Linear Wall Light	9W	4000k	408	H:50mm W:235mm Proj:33mm
ZN-38636-WHT	White	NEW					





- IP44 rated
- Die-cast aluminium construction  
Anthracite finish
- Available with or without photocell sensor

## LENS

### Up/Down Wall Light



Code	Sensor	Description	Lamp	Dimensions
ZN-29189-ATR	-	Lens Up/Down Wall Light	2 x 7W max LED GU10	H:187mm W:102mm Proj:140mm
ZN-34042-ANTH	Photocell			



- IP44 rated
- Die-cast aluminium construction  
Anthracite finish
- Available with or without photocell sensor

## LENS Downlight



Code	Sensor	Description	Lamp	Dimensions
ZN-29190-ATR	-	Lens Downlight	1 x 7W max LED GU10	H:155mm W:102mm Proj:140mm
ZN-34043-ANTH	Photocell			





IP44



- IP44 rated
- Die-cast aluminium construction  
Black ridged finish
- Available with or without photocell sensor



ZN-35686-BLK

# HELIX

Downlight






Photocell Sensor | IP44 Rated | Class 1 | 0.8kg

Code	Sensor	Description	Lamp	Dimensions
ZN-35593-BLK	-	Helix Down Light	1 x 7W max LED GU10	H:162mm W:92mm Proj:104mm
ZN-35686-BLK	Photocell			





IP44



ZN-35594-BLK

- IP44 rated
- Die-cast aluminium construction  
Black ridged finish
- Available with or without photocell sensor



ZN-35685-BLK

## HELIX

Up/Down Wall Light



Code	Sensor	Description	Lamp	Dimensions
ZN-35594-BLK	-	Helix Up/Down Wall Light	2 x 7W max LED GU10	H:223mm W:92mm Proj:104mm
ZN-35685-BLK	Photocell	Helix Up/Down Wall Light	2 x 7W max LED GU10	H:223mm W:92mm Proj:104mm

**NEW**  
COLOUR  
OPTIONS

**1200**  
Lumens

**IP54**



- Die-cast aluminium construction
- 3 colour options available
- 20W LED module (SMD)
- K: 4000
- Lm: 1200
- Lm/W: 60
- Hrs: 30,000

## MIZAR

Up/Down Wall Light



IP44  
Rated




4000K  
CW



Class 1



1.35kg



Available in  
3 colour options

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34019-ANTH	Anthracite		Mizar Up/Down Wall Light	20W	4000k	1200	H:255mm W:90mm Proj:130mm
ZN-34019-BLK	Black	<b>NEW</b>					
ZN-34019-WHT	White	<b>NEW</b>					

**NEW**  
COLOUR  
OPTIONS

**740**  
Lumens

**IP54**



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 740
- Lm/W: 74
- Hrs: 30,000

## MIZAR Downlight



IP44  
Rated



4000K  
CW



Class 1



0.83kg



Available in  
3 colour options

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34020-ANTH	Anthracite		Mizar Downlight	10W	4000k	740	H:150mm W:90mm Proj:130mm
ZN-34020-BLK	Black	<b>NEW</b>					
ZN-34020-WHT	White	<b>NEW</b>					

**850**  
Lumens

**IP44**



- Die-cast aluminium construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85

## MELO

Up/Down Wall Light

IP44  
Rated

4000K  
CW

Class 1

0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33460-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-33460-SST	Stainless Steel					

850  
Lumens

IP44



- Die-cast aluminium construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85
- Photocell sensor

## MELO

Up/Down Wall Light with Photocell Sensor



IP44  
Rated



4000K  
CW



Photocell  
Sensor



Class 1




0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34555-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-34555-SST	Stainless Steel	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm



130  
Lumens

IP44

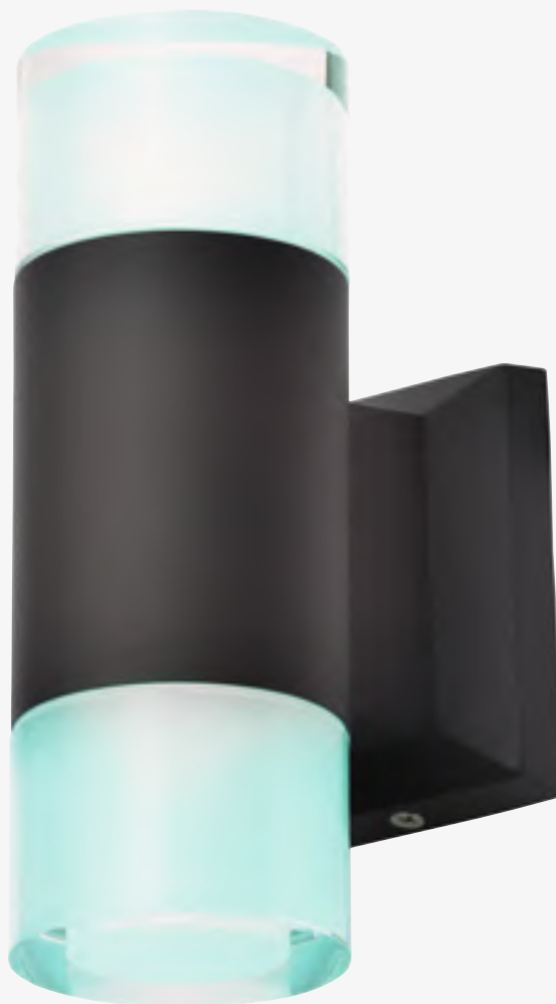

- Remote control operated
- Die-cast aluminium construction
- 5W RGB LED module (SMD)
- K: 4000
- Lm: 130
- Hrs: 20,000

## ASHBY

RGB LED Up/Down Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-31765-BLK	Black	Ashby RGB LED Up/Down Wall Light	5W	RGB	130	H:180mm W:65mm Proj:115mm

**NEW**  
COLOUR  
OPTION

**IP44**



- Die-cast aluminium construction
- Available in 3 finishes

# SKYE

Double Cone Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-29347-POLALU	Skye Double Cone Up/Down Wall Light	Polished Aluminium	2 x 7W max LED GU10	H:200mm W:77mm Proj:80mm
ZN-29347-BLK		Black		
ZN-29347-ANTH		Anthracite		

**NEW**



IP44



ZN-34002-SST



ZN-34003-BLK

- Aluminium construction
- Durable polycarbonate shade

# LEONIS

## Wall Lantern



IP44  
Rated



Class 1



0.83kg

Code	Description	Finish	Lamp	Dimensions
ZN-34002-SST	Leonis Wall Lantern	Stainless Steel	1 x 10W max LED E27 GLS	H:210mm W:130mm Proj:200mm
ZN-34003-BLK		Black		

NEW

IP44



- Die-cast aluminium construction
- Frosted glass
- Hook feature

## CHARLOTTE

Frame Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38603-BLK	Charlotte Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:345mm

NEW

IP44



- Contemporary styling
- Water glass effect

# KEB

Wall Lantern

IP44 Rated | Class 1 | 1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-32069-BLK	Keb Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:142mm W:181mm H:257mm

NEW

IP44



## CHINON

Panel Box Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38640-BLK	Chinon Panel Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:136mm W:140mm H:260mm

NEW



NEW

IP44



# CHINON

Panel 2 Light Box Lantern



IP44  
Rated



Class 1



2.05kg

Code	Description	Finish	Lamp	Dimensions
ZN-38641-BLK	Chinon Panel 2LT Box Lantern	Black	2 x 10W max LED E27 GLS	Proj:136mm W:140mm H:380mm

NEW

NEW

1200  
Lumens

IP44



- Stainless steel construction
- PVC opal cover
- 13.5W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 45

## THETIS


Box Lantern



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38354-BLK	Black	NEW	Thetis Box Lantern	13.5W	4000k	600	H:350mm W:120mm Proj:130mm
ZN-38354-SIL	Silver	NEW					

NEW

IP44

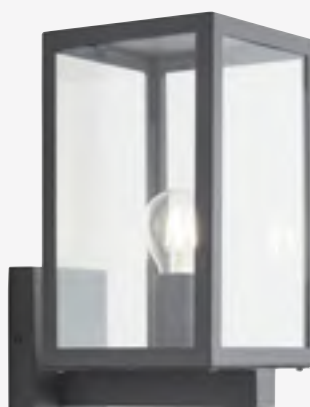

- Contemporary box lantern
- Available in 3 finishes

## HESTIA

Glass Panel Box Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38205-BLK		Black	<b>NEW</b>	
ZN-38205-SIL	Hestia Glass Panel Box Lantern	Silver	<b>NEW</b>	1 x 10W max LED E27 GLS
ZN-38205-ANTH		Anthracite	<b>NEW</b>	W:160mm H:295mm Proj:210mm

IP44



- Contemporary box lantern
- Available in 2 finishes

## ARTEMIS

Box Lantern



IP44  
Rated



Class 1



1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-20945-BLK	Artemis Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:100mm W:220mm H:240mm
ZN-20945-SST		Stainless Steel		

IP44



- Contemporary box lantern
- Available in 3 finishes

## MINERVA

Box Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-20944-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	W:160mm H:330mm Proj:100mm
ZN-20944-SIL		Silver		
ZN_20944-ANTH		Anthracite		



IP44



- Contemporary box lantern
- PIR Sensor
- 3-2000 LUX (adjustable)

## MINERVA

Box Lantern with PIR Sensor



IP44  
Rated



PIR  
Sensor



Class 1



1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-32070-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:100mm W:220mm H:240mm

NEW

IP44



- Contemporary wall lantern
- Ribbed glass effect



## MEMPHIS

Wall Lantern



IP44  
Rated



Class 1



1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-38602-BLK	Memphis Wall Lantern	Black	<b>NEW</b> 1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:445mm





**NEW**





**1000 Lumens**

**IP54**

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 18W LED module (SMD)
- K: 4000
- Lm: 1000
- Lm/W: 55

## PESSAC

Frame LED Wall Light

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38620-BLK	Black	<b>NEW</b>	Pessac Frame Wall Light	18W	4000k	1000	H:280mm W:160mm Proj:102mm

# Add some colour.

---

New range of outdoor lanterns in pale blue, mint, dove grey and ivory pastel finishes.

**CERES**



**ERIS**



**KEW**



**LEEK MINI**





**NEW**  
COLOUR  
OPTIONS

**IP44**



ZN-31757-PBLU



ZN-31757-MNT



ZN-31757-DOVG



ZN-31757-IVO



ZN-31757-ANTH

# LEEK

## Mini Fisherman's Lantern



Class 1



0.75kg



Available in  
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-31757-ANTH	Leek Mini Fisherman's Lantern	Anthracite	1 x 10W max LED E27 GLS	Proj:230mm W:180mm H:255mm
ZN-31757-PBLU		Pale Blue <b>NEW</b>		
ZN-31757-MNT		Mint <b>NEW</b>		
ZN-31757-DOVG		Dove Grey <b>NEW</b>		
ZN-31757-IVO		Ivory <b>NEW</b>		





**NEW**  
COLOUR  
OPTIONS

**IP44**



ZN-20957-PBLU



ZN-20957-MNT



ZN-20957-DOVG



ZN-20957-IVO



ZN-20957-BLK

- Die-cast aluminium construction
- Traditional styling

## ERIS

### Fisherman's Lantern



IP44  
Rated



Class 1



0.7kg



Available in  
5 colour options

Code	Description	Finish	Lamp	Dimensions	
ZN-20957-BLK	Eris Fisherman's Lantern	Black	1 x 10W max LED E27 GLS	Proj:260mm W:180mm H:370mm	
ZN-20957-PBLU		Pale Blue			<b>NEW</b>
ZN-20957-MNT		Mint			<b>NEW</b>
ZN-20957-DOVG		Dove Grey			<b>NEW</b>
ZN-20957-IVO		Ivory			<b>NEW</b>





**NEW**  
COLOUR  
OPTIONS

**IP23**



ZN-20955-PBLU



ZN-20955-MNT



ZN-20955-DOVG



ZN-20955-IVO



ZN-20955-BLK

- Die-cast aluminium construction with glass panels
- Traditional styling

## CERES Wall Lantern



IP23  
Rated



Class 1



0.98kg



Available in  
5 colour options

Code	Description	Finish	Lamp	Dimensions	
ZN-20955-BLK	Ceres Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:145mm W:105mm H:290mm	
ZN-20955-PBLU		Pale Blue			<b>NEW</b>
ZN-20955-MNT		Mint			<b>NEW</b>
ZN-20955-DOVG		Dove Grey			<b>NEW</b>
ZN-20955-IVO		Ivory			<b>NEW</b>

**NEW**  
COLOUR  
OPTIONS

**IP44**



ZN-31809-PBLU



ZN-31809-MNT



ZN-31808-POLSST



ZN-31809-DOVG



ZN-31809-IVO



ZN-31809-SST

- Contemporary styling
- Available in 6 different finishes

## KEW Wall Lantern



IP44  
Rated



Class 1



0.91kg



Available in  
6 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-31808-POLSST	Kew Wall Lantern	Polished Steel	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm
ZN-31809-SST		Stainless Steel		
ZN-31809-PBLU		Pale Blue <b>NEW</b>		
ZN-31809-MNT		Mint <b>NEW</b>		
ZN-31809-DOVG		Dove Grey <b>NEW</b>		
ZN-31809-IVO		Ivory <b>NEW</b>		

IP44



- Vintage styling
- Black satin finish

## WOKING

Wall Lantern



Code	Description	Lamp	Dimensions
ZN-31807-TBLK	Woking Wall Lantern	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm

IP44



- Stainless steel finish
- Vintage styling

## KARI

Porch Lantern



Code	Description	Lamp	Dimensions
ZN-24507-SST	Kari Porch Lantern	1 x 10W max LED E27 GLS	H:310mm Dia:145mm

NEW

IP44



- Stainless steel construction
- Polycarbonate diffuser

## CARNAC

Up or Down Wall Lantern



IP44  
Rated



Class 1



0.5kg

Code	Description	Finish	Lamp	Dimensions
ZN-38630-BLK	Carnac Wall Lantern	Black	<b>NEW</b> 1 x 10W max LED E27 GLS	Proj:146mm W:85mm H:280mm

NEW

IP44



- Traditional style outdoor lantern
- PIR sensor option available
- 2 colour options

## LIBOURNE

6 Panel Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38605-BLK	Libourne Wall Lantern	Black	<b>NEW</b>	Proj:215mm W:167mm H:360mm
ZN-38605-WHT		White	<b>NEW</b>	
ZN-38606-BLK	Libourne Wall Lantern with PIR sensor	Black	<b>NEW</b>	
ZN-38606-WHT		White	<b>NEW</b>	

IP44



- IP44 rated
- Die-cast aluminium construction
- Traditional styled half lantern
- Available with or without photocell sensor

# PERSEI

## Half Lantern

 Photocell Sensor | 
  IP44 Rated | 
  Class 1 | 
  1.08kg

Code	Sensor	Description	Lamp	Dimensions
ZN-33994-BLK	-	Persei Half Lantern	1 x 10W max LED E27 GLS	H:380mm W:210mm Proj:100mm
ZN-33995-BLK	Photocell			

IP44



- IP44 rated
- Vintage style lantern
- Black satin finish

## PERDITA

Half Lantern

 IP44 Rated |  Class 1 |  0.5kg

Code	Description	Lamp	Dimensions
ZN-25464-BLK	Perdita Half Lantern	1 x 10W max LED E27 GLS	Proj:129mm W:179mm H:196mm



IP44



- IP44 rated
- Vintage style lantern
- Black satin finish

## PERDITA

Curved Wall Lantern

IP44 Rated | Class 1 | 0.55kg

Code	Description	Lamp	Dimensions
ZN-25463-BLK	Perdita Curved Wall Lantern	1 x 10W max LED E27 GLS	Proj:193mm W:170mm H:230mm

IP44



- IP44 rated
- Die-cast aluminium construction
- Available in 2 finishes
- Available with or without PIR sensor

## SIGMA

Slatted Wall Lantern



PIR  
Sensor



IP44  
Rated



Class 1



0.65kg

Code	Finish	Sensor	Description	Lamp	Dimensions
ZN-25340-SST	Stainless Steel	–	Sigma Slatted Wall Lantern	1 x 10W max LED E27 GLS	H:275mm W:200mm Proj:90mm
ZN-28708-SST	Stainless Steel	PIR			
ZN-28708-BLK	Black	PIR			

NEW

200  
Lumens

IP44



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 10W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50

## POLLUX

Angled Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38615-BLK	Black	NEW	Pollux Angled Wall Light	4W	3000k	200	Dia:76mm H:205mm
ZN-38615-SST	Stainless Steel	NEW					

**NEW**

**200  
Lumens**

**IP44**



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 10W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50
- PIR sensor

## POLLUX

Wall Light with PIR Sensor



IP44  
Rated



3000K  
WW



PIR  
Sensor



Class 1



0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38616-BLK	Black	Pollux Wall Light with PIR Sensor	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38616-SST	Stainless Steel					

**NEW**

**200  
Lumens**

**IP44**



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 10W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50

## POLLUX Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38614-BLK	Black	<b>NEW</b>	Pollux Wall Light	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38614-SST	Stainless Steel	<b>NEW</b>					





ZN-33394-BLK



ZN-33394-SST





**200**  
Lumens

**IP44**

- Die-cast aluminium
- Floor mounted
- Other matching items available
- Available in 2 finishes
- 3 variable heights - 300 / 550 / 800mm
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50

## POLLUX

LED Post Light

 IP44 Rated
  3000K WW
  Class 1
  1.06kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33394-BLK	Black	Pollux LED Post Light	4W LED	3000K	200	H:800mm Dia:120mm
ZN-33394-SST	Stainless Steel					

IP67



- Stainless steel with glass lens  
robust construction
- Min void: 115mm
- Cable length: 300mm



## PAN Ground Light



Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-29184-BLK	Pan Ground Light	Black	1 x 7W max LED GU10	Dia:100mm H:135mm	Dia:98mm



**NEW**  
COLOUR  
OPTION

**IP67**



- Stainless steel with glass lens robust construction
- Min void: 115mm
- Cable length: 300mm

## PAN Ground Light



Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-20965-SST	Pan Ground Light	Stainless Steel	1 x 7W max LED GU10	Dia:100mm H:115mm	Dia:98mm
ZN-20965-BLK		Black			

100  
Lumens

IP67



- Die-cast aluminium
- 3W LED module (SMD)
- K: 4000
- Lm: 100
- Lm/W: 33




## SCOUT

Surface Mount Ground Light

IP67 Rated | 4000K CW | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35738-BLK	Black	Scout Surface Mount Ground Light - 150mm	3W	4000k	100	33	Dia:150mm Proj:53mm

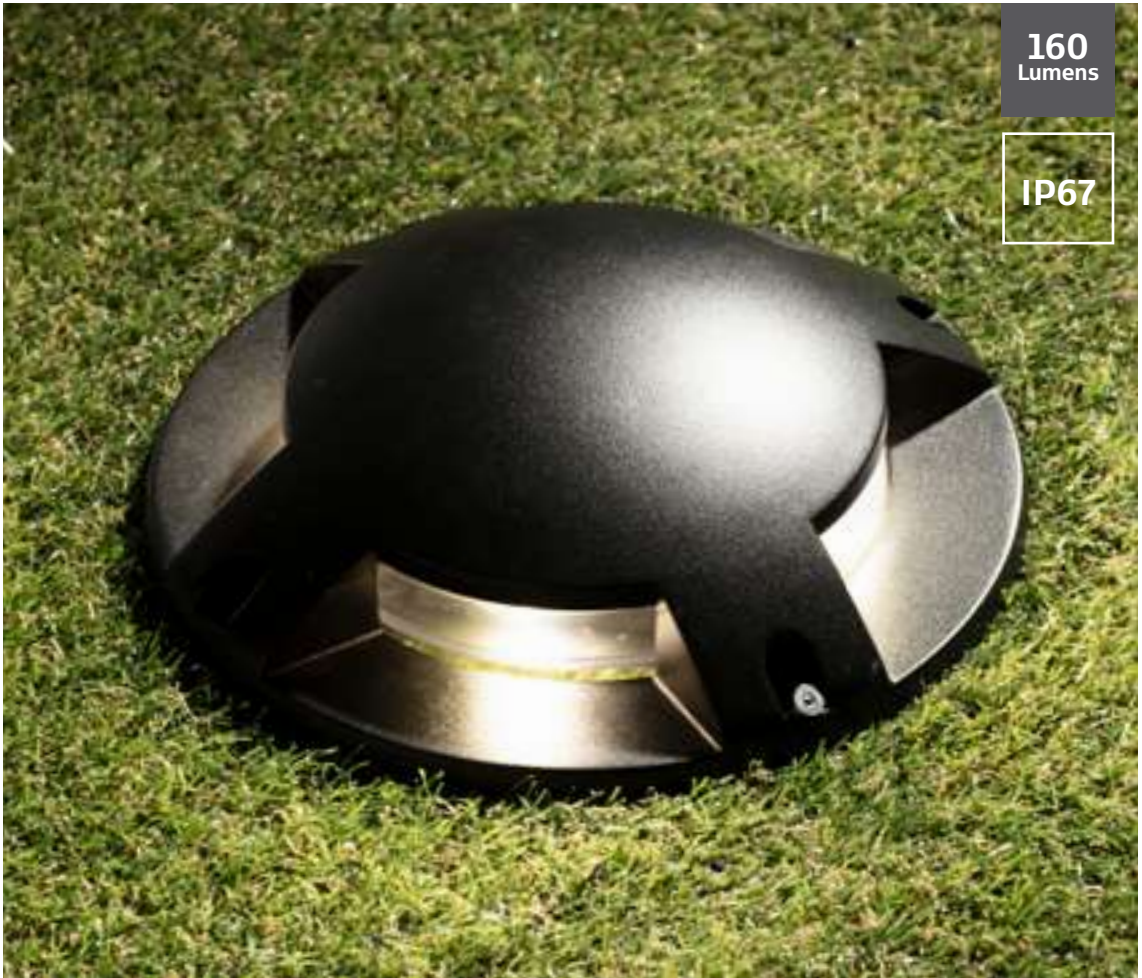

160  
Lumens

IP67

- Die-cast aluminium
- 4W LED module (SMD)
- K: 4000
- Lm: 160
- Lm/W: 40



## SCOUT

Surface Mount Ground Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29997-BLK	Black	Scout Surface Mount Ground Light	4W	4000k	100	40	Dia:210 Proj:55mm





**200**  
Lumens

**IP65**



- Constructed from stainless steel and polycarbonate
- 10 x 0.162W LED module (SMD)
- 1 x 12V IP20 inline transformer with 4m cable
- Easy to install

# OHIO

## 10 Light Decking Kit

IP65 Rated | 6000K DW | Class 3 | 0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-27858-SST	Black	Ohio 10 Light Decking Kit	10x 0.162W	6000k	200	Dia:30mm Proj:1mm



20  
Lumens

IP65

NO  
DRIVER  
REQ.



- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 1m cable included
- 0.5W LED module (SMD)
- Lm: 20

## OHIO

Circular Decking Light

IP65 Rated | 40mm Cut-out | 1M Cable | Class 2 | 0.13kg

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465-CW	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm





**390**  
Lumens

**IP54**




- Includes full number/letter set
- 6W LED module (SMD)
- K: 4000
- Lm: 390
- Lm/W: 65
- Hours: 30,000
- Dusk/Dawn photocell sensor

**IOTA**  
LED Door Number

 IP54 Rated	 4000K CW	 Photocell Sensor	 Class 2	 0.8kg
--	--	---	--	--

Code	Description	Finish	Lamp	Lumen	Dimensions
ZN-34044-BLK	Iota LED Door Number	Black	6W LED	390	H:200mm W:195mm Proj:36mm



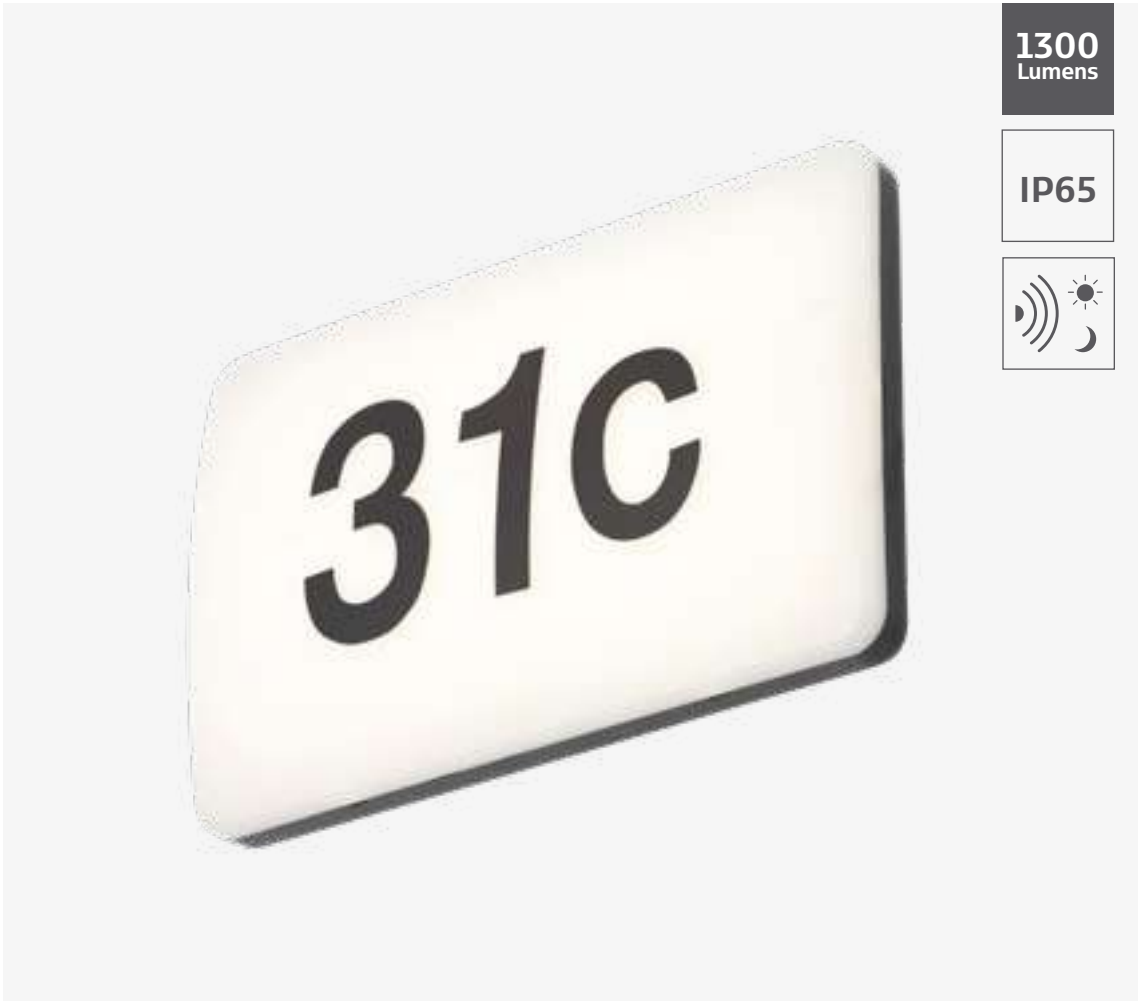

**1300**  
Lumens

**IP65**



- IK10 vandal resistant
- Polycarbonate construction
- 16W LED module (SMD)
- K: 3000
- Lm: 1300
- Lm/W: 81.25
- Hours: 20,000
- Automatically turns on/off at night with adjustable lux sensor <3-50 LUX

## MESA

LED Door Number



IK10



IP65  
Rated



3000K  
WW



LUX  
Sensor



Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35689	Black/Opal	Mesa LED Door Number	16W	3000k	1300	81.25	H:195mm W:300mm Proj:70mm

**NEW**  
COLOUR  
OPTIONS

**750**  
Lumens

**IP65**



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 10W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 75
- Hrs: 20,000



## LYNN

### PIR Security Spotlight



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35687-BLK	Black		Lynn Security Spotlight with PIR Sensor	10W	4000k	750	H:205mm W:127mm Proj:140mm
ZN-35687-DGRY	Dark Grey	<b>NEW</b>					
ZN-35687-WHT	White	<b>NEW</b>					

**NEW**

**750  
Lumens**

**IP65**



- Polycarbonate construction
- 10W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 75
- Hrs: 20,000



## LYNN

Security Spotlight



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38627-BLK	Black	<b>NEW</b>	Lynn Security Spotlight	10W	4000k	750	H:127mm W:127mm Proj:160mm
ZN-38627-DGRY	Dark Grey	<b>NEW</b>					
ZN-38627-WHT	White	<b>NEW</b>					

**NEW**  
COLOUR  
OPTIONS

**1500**  
Lumens

**IP65**



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 20W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 75
- Hrs: 20,000



## LYNN

### PIR Twin Security Spotlight



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35688-BLK	Black		Lynn Security Twin Spotlight with PIR Sensor	20W	4000k	1500	H:205-mm W:305mm Proj:135mm
ZN-35688-DGRY	Dark Grey	<b>NEW</b>					
ZN-35688-WHT	White	<b>NEW</b>					

**NEW**

**1500  
Lumens**

**IP65**



- Polycarbonate construction
- 20W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 75
- Hrs: 20,000

**LYNN**

Twin Security Spotlight



IP65  
Rated



4000K  
CW



Class 2



0.45kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38628-BLK	Black	<b>NEW</b>	Lynn Security Twin Spotlight	20W	4000k	1500	H:127mm W:179mm Proj:145mm
ZN-38628-DGRY	Dark Grey	<b>NEW</b>					
ZN-38628-WHT	White	<b>NEW</b>					



**480**  
Lumens

**IP44**



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 6W LED module (SMD)
- K: 6000
- Lm: 480
- Lm/W: 80
- Hrs: 20,000



# SIROCCO

## PIR Twin Security Spotlight

IP44 Rated | 6000K DW | PIR Sensor | Class 1

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-23454-BLK	Black	Sirocco Security Twin Spotlight	6W	6000k	480	80	H:160mm W:147mm
ZN-23454-WHT	White	Sirocco Security Twin Spotlight with PIR Sensor					Proj:134mm

NEW

200  
Lumens

IP44



- Glass lens with ABS and steel construction
- Battery: 1800mAh Li-ion
- Time on: 30 seconds
- 3-5m Detection Distance
- 2W LED module (SMD)
- K: 6000
- Lm: 200
- Lm/W: 100
- Hrs: 20,000

## SOLAR

Security Sensor Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-37052-BLK	Black	Solar Security Sensor Light	2W	6000k	200	100	H:160mm W:147mm Proj:134mm



Upto  
**8000**  
Lumens

**IP65**



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation

## OTLEY

### LED Slimline Floodlight

 IP65 Rated |  180° Beam |  6500K DW |  0.5M Cable |  Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-34354-BLK	Otley LED Slimline Floodlight	10W LED	800	0.18kg	H:120mm W:103mm Proj:65mm
ZN-34355-BLK		20W LED	1600	0.41kg	H:162mm W:159mm Proj:85mm
ZN-34356-BLK		30W LED	2400	0.41kg	H:162mm W:159mm Proj:85mm
ZN-34357-BLK		50W LED	4000	0.74kg	H:180mm W:205mm Proj:115mm
ZN-34358-BLK		100W LED	8000	1.37kg	H:230mm W:270mm Proj:142mm



ZN-34362-BLK



Upto  
**4000  
Lumens**

**IP65**

ZN-34359-BLK



ZN-34360-BLK









ZN-34361-BLK



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance
- Hrs: 20,000

## RYE

LED Slimline Floodlight with PIR

 PIR Sensor |
  IP65 Rated |
  180° Beam |
  6500K DW |
  0.5M Cable |
  Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-34359-BLK	Rye LED Slimline Floodlight with PIR	10W LED	800	0.23kg	H:140mm W:103mm Proj:148mm
ZN-34360-BLK		20W LED	1600	0.46kg	H:180mm W:158mm Proj:159mm
ZN-34361-BLK		30W LED	2400	0.46kg	H:180mm W:158mm Proj:159mm
ZN-34362-BLK		50W LED	4000	0.82kg	H:200mm W:205mm Proj:150mm

**Upto  
1400  
Lumens**

**IP54**



- Tough aluminium construction
- Rotates 360° on base
- Non-slip carry handle
- 40,000 hours LED lifetime
- Fully charged in 4-5 hours
- Supplied with power adapter and in-car charger

- Power adapter and in-car charger

## RECHARGEABLE Worklight



Description	Code	Power (w)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Charge Time (h)	Run Time (h)	Dimensions
Rechargeable Work Light	ZN-31385	10W	700	70	6000k	4-5 Hours	4 Hours	L:135mm W:120mm H:255mm
	ZN-31386	20W	1400	70				L:160mm W:160mm H:300mm

---

# HEAVY DUTY

## Tripod



- Die-cast construction
- Extendable up to 1.58m
- Easy to fit lamp heads
- For use with ZN-31385 & ZN-31386
- 20W floodlights not included

Code

Description

Dimensions


ZN-31387

Heavy Duty Tripod

Dia:800mm W:500mm H:1580mm





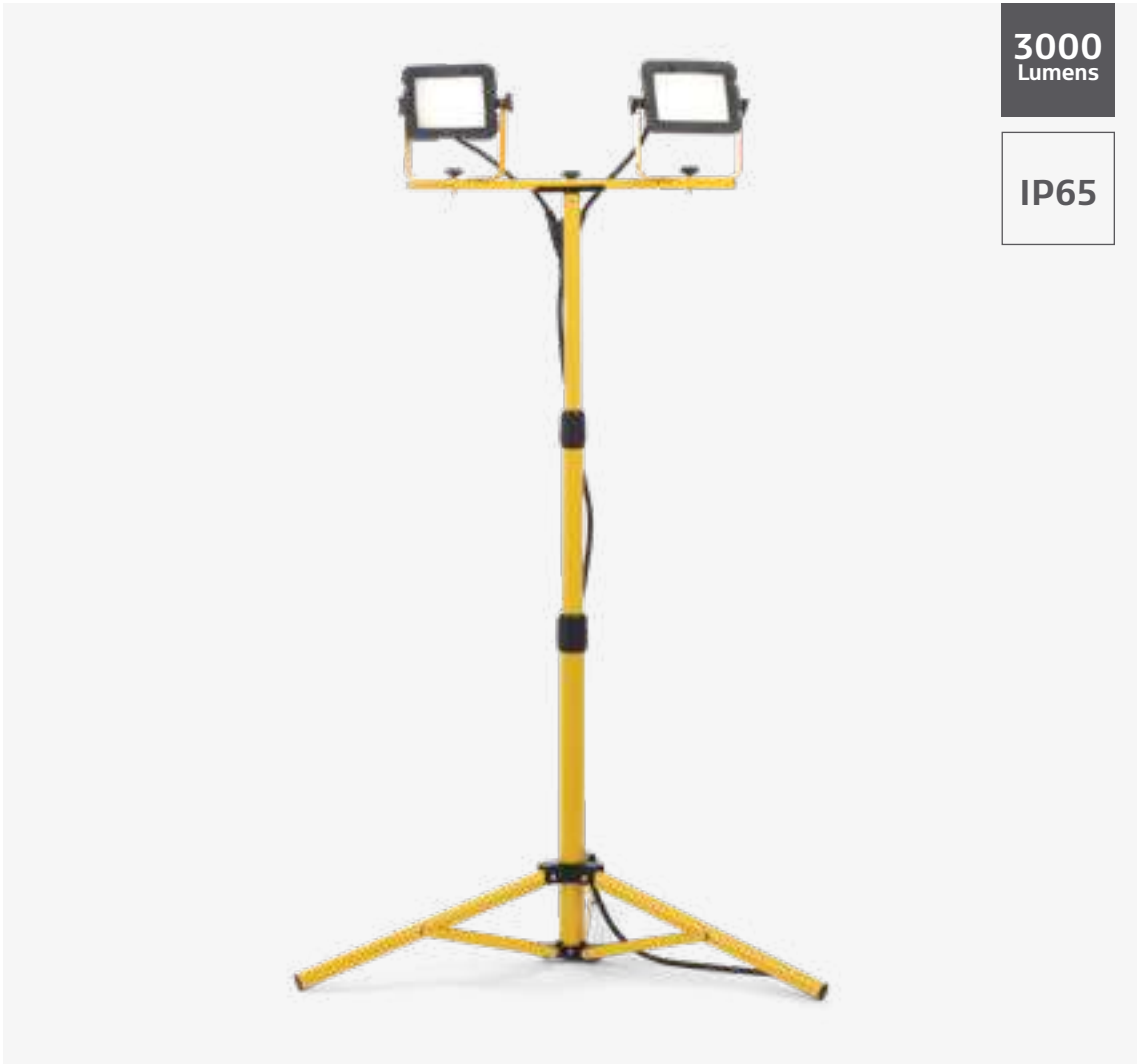

**3000  
Lumens**






**IP65**

- Durable rubber casing
- Heavy duty extendable tripod up to 1.6m
- 1.8m H07RN-F cable
- 2 x 20W LED module (SMD)
- K: 6000
- Lm: 3000
- Lm/W: 75
- Hrs: 20,000



## TWIN LED

Worklight with Tripod

				
IP65 Rated	6000K DW	1.8M Cable	Class 1	3.4kg


Code	Description	Voltage	Lamp	Lumen	Dimensions
ZN-34870	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1600mm

# Outdoor heating

---

New extensive range of Zinc radiant heaters perfect for outdoor settings.



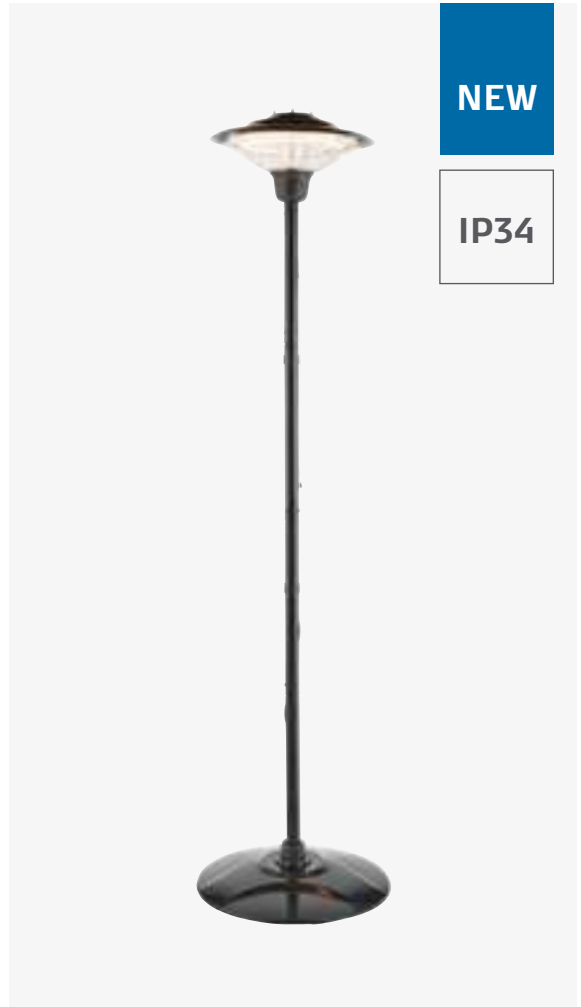


- **NOTE:** Finish is silver, images for illustration purposes only.
- Single heat setting
- Aluminium cover, size: 420 x 420mm
- Heating element: Carbon tube
- Outdoor use only
- Waterproof: IP34
- Pull-string switch control
- Tip over switch



## CORAL

### Outdoor Pedestal Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-38155-SIL	Coral Outdoor Pedestal Heater	Silver	1500	H:1800mm Dia:510mm

**NEW**



## BLAZE

STAND FOR WALL  
MOUNT HEATERS



- Adjustable height

Code	Weight	Dimensions
ZR-32302-BLK	18.7kg	H:1700mm Dia:410mm

## EXTENSION CABLE

**NEW**



- IP67
- BS plug
- HO7RN-F cable

Code	Length
ZR-38835-BLK	3 meters
ZR-38836-BLK	6 meters

IP44





- Pull ON/OFF switch
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP44 rating
- Stand available separately (ZR-32302)



# BLAZE

Wall Mounted Patio Heater

 IP44 Rated  
 2.4kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32298-BLK	Blaze Wall Mounted Patio Heater	Black	1800	H:245mm W:650mm Proj:215mm



IP44



- Remote control operated
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP44 rating
- Stand available separately (ZR-32302)



# BLAZE

Wall Mounted Patio Heater with LED Lights



Code	Description	Finish	Power (w)	Dimensions
ZR-32299-BLK	Blaze Wall Mounted Patio Heater with LED Lights	Black	1800	H:245mm W:890mm Proj:215mm





**3**  
HEAT  
SETTINGS

**IP24**



- Pull switch
- 3 variable heat settings
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP24 rating
- Stand available separately (ZR-32302)



# BLAZE

Wall Mount Patio Heater Variable Watt



3 Heat  
Settings




IP24  
Rated



2.0kg

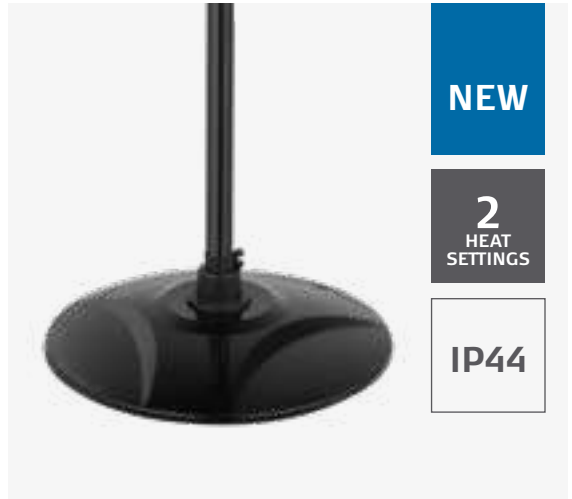


Code	Description	Finish	Power (w)	Dimensions
ZR-32297-BLK	Blaze Wall Mount Patio Heater	Black	2000	H:265mm W:480mm Proj:215mm



- Pull string switch
- 2 variable heat settings
- Tip over safety switch
- Heat coverage approx 20m<sup>2</sup>
- IP44 rating
- Outdoor use only

## AGATE

### Floor Standing Patio Heater

Code	Description	Finish	Power (w)	Dimensions
ZR-38528-BLK	Agate Floor Standing Patio Heater	Black	2000	H:2280mm W:500mm D:750mm

**NEW**



**NEW**

**IP34**



- Pull string switch
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only

## CORAL

Pendant Heater

 IP34 Rated  
 1.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-38529-SST	Coral Pendant Heater	Stainless Steel <b>NEW</b>	1500	H:240mm Dia:420mm

**NEW**

**IP34**



**Pendant Heater**

- ON/OFF switch
- Remote control operated
- Integrated LED light
- Heat coverage approx 20m<sup>2</sup>
- IP34 rating
- Outdoor use only

**Floor Standing Heater**

- Pull string switch
- 2 heat setting
- Tip over safety switch
- Heat coverage approx 20m<sup>2</sup>
- IPX4 rating
- Outdoor use only

**MARL**  
Outdoor Heaters



Code	Description	Finish		Power (w)	Dimensions	Weight
ZR-38532-SST	Marl Pendant Heater	Stainless Steel	<b>NEW</b>	2000	H:290mm Dia:510mm	2.1kg
ZR-38531-SST	Marl Floor Standing Heater	Stainless Steel	<b>NEW</b>	2000	H:2000mm Dia:500mm	8.4kg



**NEW**

**IP34**



**Pendant Heater**

- Pull string switch
- Remote control operated
- Integrated LED light
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only

**Floor Standing Heater**

- Pull string switch
- Single heat setting
- Tip over safety switch
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only

**MARL**  
Outdoor Heaters



Code	Description	Finish		Power (w)	Dimensions	Weight
ZR-38533-BLK	Onyx Pendant Heater	Black	<b>NEW</b>	1500	H:2000mm Dia:500mm	8.8kg
ZR-38534-BLK	Onyx Floor Standing Heater	Black	<b>NEW</b>	1500	H:420mm Dia:310mm	2.5kg



**NEW**

**3  
HEAT  
SETTINGS**

**IP44**

- Free standing or wall mounted
- 3 heat settings
- Heat coverage approx 12m<sup>2</sup>
- Steel cover, size: 500 x 360mm
- Heating element: Carbon tube
- Outdoor use only
- Waterproof: IP44
- Pull-string switch control
- Tip over switch

## OPAL

Outdoor/Indoor Pedestal Heater

 3 Heat Settings | 
  IP44 Rated | 
  8.4kg

Code	Description	Finish	Power (w)	Dimensions
ZR-38156-BLK	Opal Outdoor/Indoor Pedestal Heater	Black	<b>NEW</b> 2000	H:1710–2100mm Dia:500mm



- Remote control
- Hanging and wall mount type
- 3 heat settings - 900/1900/2800W
- Heat coverage approx 25m<sup>2</sup>
- 4 Hour timer
- 1.9M Cable
- Black brushed aluminium finish
- PIR economy function



## JET

### Outdoor Ceiling Mount Heater



Code	Description	Finish		Power (w)	Dimensions
ZR-37443-BLK	Jet Outdoor Ceiling Mount Heater	Black	<b>NEW</b>	2800	H:188mm W:1270mm L:195mm





**3**  
HEAT  
SETTINGS

**IP65**



- Ideal for commercial applications
- Remote control operated
- Variable heat setting
- 1-9 Hour Timer
- Heat coverage 20m<sup>2</sup>
- IP65 rating

# GLOW

Wall Mounted Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-32301-BLK	Glow Wall Mounted Heater	Black	3000	H:160mm W:1470mm Proj:162mm



- Ideal for indoor/outdoor use
- Remote control operated
- 3 variable heat settings
- 0-24 Hour Timer
- Heat coverage approx 12m<sup>2</sup>
- IP55 rating

## INDOOR/OUTDOOR

### Wall Mount Heater with 24Hr Timer

 3 Heat Settings
  IP55 Rated
  3.1kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32328-BLK	Wall Mount Heater with 24Hr Timer	Black	2000	H:140mm W:900mm L:90mm








- Bluetooth speaker
- Remote control operated
- Heat coverage approx 12m<sup>2</sup>
- 1.5M HO7RN-F 3G1.5MM cable
- ON/OFF and power adjust
- IP65

## FLINT

Wall Mount Heater with Bluetooth Speaker

 Bluetooth Speaker | 
  IP65 Rated | 
  3.5kg

Code	Description	Finish		Power (w)	Dimensions
ZR-37444-BLK	Flint Wall Mounted Heater with Bluetooth	Black	<b>NEW</b>	2000	H:120mm W:745mm L:110mm



**NEW**

**IP45**

- Carbon fibre tube
- ON/OFF switch
- Fabric-flocked vents area
- 1.8M cable
- Heat coverage approx 4m<sup>2</sup>
- IP45 rated

## HARRY

Outdoor Portable Table Heater

IP45  
Rated

3.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-37441-BLK	Harry Outdoor Portable Table Heater	Matt Black	1200	H:650mm Dia:195mm

**NEW**



- Remote control operated
- Tip over safety switch
- 3 variable heat settings
- Heat coverage approx 10m<sup>2</sup>
- IP55 rated




## BLAZE

Standing Patio Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-32300-BLK	Blaze Standing Patio Heater	Black	1600	H:1100mm Dia:280mm



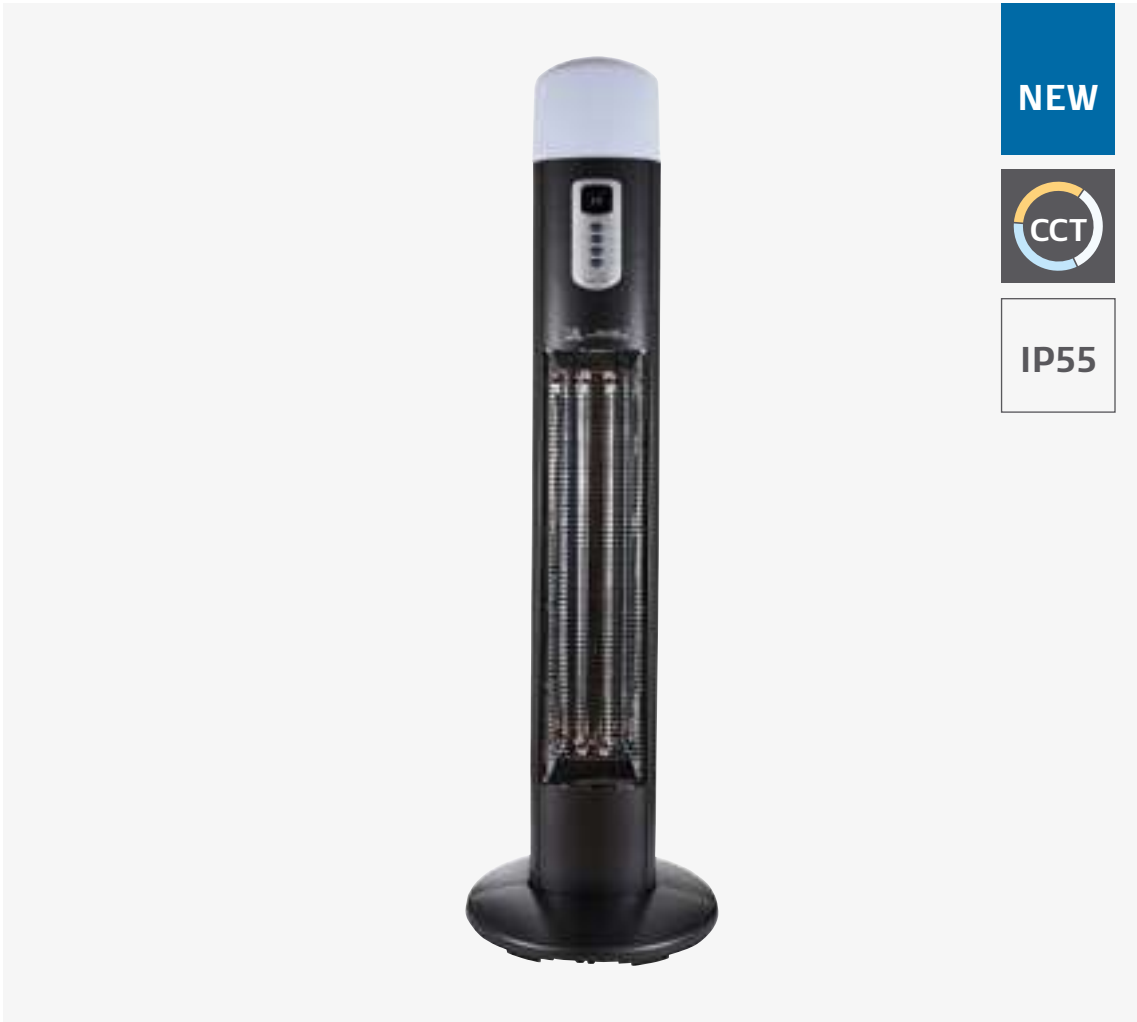



- 2 heat settings: 1480/2960W
- Carbon fibre heating technology
- Large, effective heating area of up to 30m<sup>2</sup>
- PIR economy system
- IP55 rated
- 12W LED Colour changing light: Warm/Daylight/Cool
- Gun metal hammered finish with fabric flocked grille with storage cover
- Magnetic remote control



# AMBER

## Floor Standing Outdoor Heater

 2 Heat Settings
  IP55 Rated
  21.8kg

Code	Description	Finish		Power (w)	Dimensions
ZR-37442-GMTL	Amber Wall Mounted Heater	Gun Metal	<b>NEW</b>	3000	H:160mm W:1470mm Proj:162mm



NEW


IPX3



- Iron lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 10m<sup>2</sup>
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- Each lamp independently switched

## TOPAZ

2 x 800W Parasol Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37448-BLK	Topaz Parasol Heater	Black	<b>NEW</b> 2 x 800	H:230mm W:420mm L:300mm



**NEW**

**IPX3**



- Aluminium diecast lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 12m<sup>2</sup>
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- ON/OFF switch

# RUBY

4 x 450W Parasol Heater

IPX3  
Rated

2.4kg

Code	Description	Finish		Power (w)	Dimensions
ZR-37445-BLK	Ruby Parasol Heater	Black	<b>NEW</b>	4 x 450	H:130mm W:445mm L:445mm

## IP66 13A SWITCHED SOCKET

NEW

IP66

- IP66 rated
- Lockable lid
- Multiple 20mm cable entries
- Certified to BS 1363-2



Code	Description	
ZN-38865	1 Gang IP66 13A Socket	NEW
ZN-38863	2 Gang IP66 13A Socket	NEW

## IP66 RCD 13A SWITCHED SOCKET

NEW

IP66

- IP66 rated
- Lockable lid
- Multiple 20mm cable entries
- Trip Current: 30mA
- Trip Speed: 100ms
- Certified to BS 1363-2



Code	Description	
ZN-38864	2 Gang IP66 RCD 13A Socket	NEW

## FUSED SPUR SWITCHED

NEW

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries



Code	Description	
ZN-38870	Switched + Indicator	NEW



## IP66 EMPTY ENCLOSURE

NEW

IP66

- Accepts standard switches and sockets
- IP66 rated
- Multiple 20mm cable entries



Code	Description	
ZN-38869	1 Gang Empty Enclosure	NEW
ZN-38868	2 Gang Empty Enclosure	NEW

## IP66 20A SWITCH

NEW

IP66

- Robust polycarbonate housing
- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description	
ZN-38866	1 Gang 1 Way 20A Switch	NEW
ZN-38867	2 Gang 2 Way 20A Switch	NEW

## IP66 20A BELL SWITCH

NEW

IP66

IK08

- IP66 / IK08 rated
- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description	
ZN-38871	1 Gang 1 Way 20A Bell Switch	NEW

**500  
Lumens**



- Polycarbonate construction
- Can detect day or night with adjustable LUX
- 6m Detection Distance
- 360° Detection Range
- 10 secs - 5min adjustable timer
- 8W LED module (SMD)
- K: 3000
- Lm: 500
- Lm/W: 62.5

# RENO

## LED Recessed PIR Spotlight



Code	Power (w)	Colour (k)	Total Flux (lm)	Distance	Range	LUX (adjustable)	Time Delay (adjustable)	Dimensions
ZN-35690-WHT	8W	3000k	500	Max 6m	360°	<3-2000 LUX	Min.10sec±3sec Max.5min±1min	Dia:105mm H:48mm

MANUAL  
OVERRIDE



IP44



- Polycarbonate construction
- LED compatible
- Manual override function
- 20m max detection distance
- 360° detection range
- Can be installed up to 6m high



## NAPA

Adjustable Wall PIR Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-35691-BLK	2 – 6m	Max 20m	360°	3-2000 LUX (adjustable)	2000W Halogen 600W LED	H:56mm W:87mm Proj:173mm

**NEW**

**IP44**



- Polycarbonate construction
- LED compatible
- Detection Distance: 5 - 12m
- Detection Range: 180°
- Timer: 10 secs - 7min

# DION

Motion Sensor



Code	Finish		Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25151-BLK	Black	<b>NEW</b>	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen	H:150mm W:90mm Proj:120mm
ZN-25151-WHT	White	<b>NEW</b>					300W LED	
ZN-25151-DGRY	Dark Grey	<b>NEW</b>						

**NEW  
COLOUR  
OPTION**

**IP65**



**MANUAL  
OVERRIDE**



- Polycarbonate construction
- LED compatible
- Adjustable LUX and timer
- Manual override (8 hrs)
- Detection Distance: 5 - 12m
- Detection Range: 180°
- Timer: 10 secs - 7min

• Adjustable LUX & timer

# DION

## Adjustable Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33579-BLK	Black	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen	H:51.5mm W:80mm Proj:119.5mm
ZN-33579-WHT	White					300W LED	
ZN-33579-DGRY	Dark Grey <b>NEW</b>					300W LED	

IP44



- Polycarbonate construction
- LED compatible
- Easy to adjust LUX & time
- 12m max detection distance
- 2 sensors for extended range of detection
- Creep sensor

# DION

## Stealth Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31787-WHT	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119.5mm W:80mm H:51.5mm



· Corner or flush mounted

- Polycarbonate construction
- LED compatible
- Manual override (8 hrs)
- Detection Distance: max 12m
- Detection Range: 180°



# ALIA

## Adjustable Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33615-BLK	Black	1.6 – 2.5m	max 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:120mm W:78mm Proj:53mm
ZN-33615-WHT	White						



# ALIA

CORNER MOTION SENSOR



## AVAILABLE SETTINGS

**TIME DELAY**  
Min: 10 sec±3sec  
Max: 7min±1min

**DETECTION RANGE**  
360°

**DETECTION DISTANCE**  
Max 12m (<24°)

**NEW  
COLOUR  
OPTION**

**IP44**



- Polycarbonate construction
- LED compatible
- Can be fitted to an external or internal corner.
- Mount can be removed to fit against flush walls.
- Detection Distance: 5 - 12m
- Detection Range: 360°
- Timer: 10 secs - 7min

• Removeable corner mount

# ALIA

## Corner Motion Sensor

 IP44 Rated
  PIR Sensor
  0.18kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25152-BLK	Black	1.6 – 2.5m	5 – 12m	360°	3-2000 LUX (adjustable)	1200W Halogen	H:79mm W:60mm Proj:119mm
ZN-25152-WHT	White					300W LED	
ZN-25152-DGRY	Dark Grey					<b>NEW</b>	

**IP44**



**x3**  
SENSOR



- LED compatible
- 3 integral sensors
- 12m max detection distance
- 360° detection range
- 10 secs – 7 mins adjustable timer
- Polycarbonate construction

## LOCA

Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25154-WHT	1.6 – 2.5m	12m max	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:55mm Dia:88mm

**IP44**



**x3**  
SENSOR



- LED compatible
- 3 integral sensors
- 20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction

## LOCA

Advanced Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29177-WHT	1.6 – 2.5m	Max 20m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	L:102mm W:102mm H:58mm



- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

## LOCA

Motion Sensor



0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25153-WHT	2 – 2.4m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:46mm Dia:88mm



- LED compatible
- 12m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

## LOCA

Extended Range Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31786-WHT	1.6 – 2.5m	Max 12m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:51mm Dia:120mm



- Easily remove cover when recessed to adjust settings
- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction



## LOCA

Recessed Motion Sensor



40mm  
Cut-out



PIR  
Sensor



0.05kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25155-WHT	1.6 – 2.5m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 200W LED	H:16.8mm Dia:50mm





- 3 mounting positions
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction



## THEA

Conduit Motion Sensor



78mm  
Cut-out



PIR  
Sensor



0.05kg


Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31805-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:39mm Dia:80mm



- LED compatible
- 1, 2, 3, 4, 5, 6, 7, 8, 9 hours timer
- Polycarbonate construction

## ADRA

Dusk Till Dawn Sensor




Code	Timer	LUX	Max Rated Load	Dimensions
ZN-25156-BLK	1, 2, 3, 4, 5, 6, 7, 8, 9 Hours	3-500 LUX (adjustable)	1200W Halogen 250W LED	H:190mm W:70mm Proj:41mm



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 2 – 15m detection distance when wall mounted
- 1.8m radius when ceiling mounted
- 180/360° detection range
- 10 secs – 12 mins adjustable timer

## THEA


Wall/Ceiling Microwave Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29185-WHT	1.6 – 3.5m	2 – 15m	180/360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	L:76mm W:37mm H:25mm

**NEW**

**IP65**

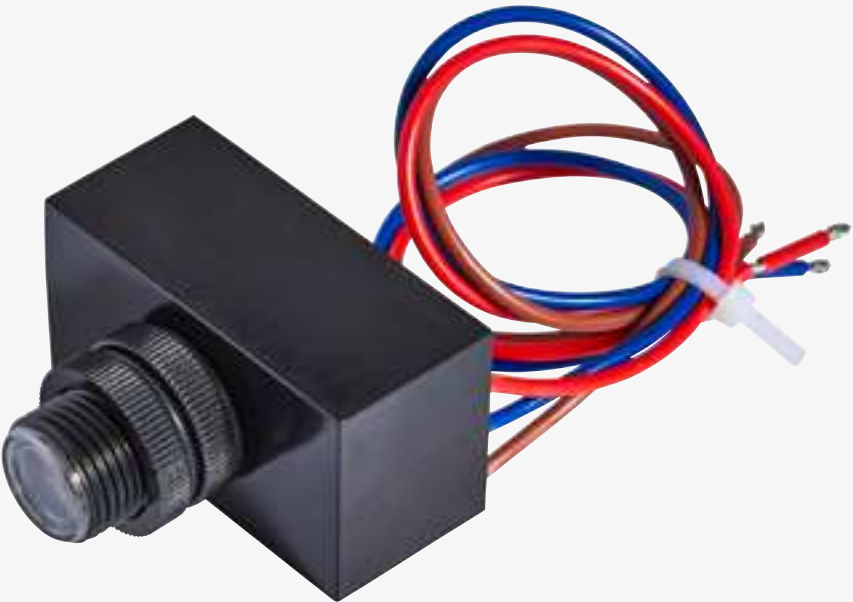

- Rated current: 10A
- Ambient light: <10LUX

# ADRA

Photocell Sensor



IP65  
Rated



16.5mm  
Cut-out



Photocell  
Sensor



0.1kg

Code	Description	Finish	LUX	Max Rated Load	Dimensions
ZN-38599-BLK	Adra Photocell Sensor	Black	<b>NEW</b> 3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:70mm W:110mm Proj:35mm

**NEW**

**IP65**



- Polycarbonate construction
- LED compatible
- Detection Distance: max 10m
- Detection Range: 360°
- Timer: 10 secs - 7min

# DION

Batten Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-38600-WHT	White <b>NEW</b>	1.6 – 2.5m	max 10m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:28mm W:33mm Proj:113mm



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 5 – 15m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

## THEA

Recessed Microwave Sensor



62mm  
Cut-out



Microwave  
Sensor



0.10kg


Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29187-WHT	1.6 – 3.5m	5 – 15m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:75.4mm Dia:76mm



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 1 – 8m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

## THEA

Stealth Microwave Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29186-WHT	1.6 – 3.5m	1 – 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	H:24mm Dia:115mm





# COASTAL

An extensive range of outdoor lighting constructed from polycarbonate with grade 316 stainless steel fixings. Domestic light fittings, designed with coastal areas in mind.

<b>POST LIGHTS</b>	<b>160-162</b>
<b>LANTERN</b>	<b>163-171</b>
<b>BULKHEADS</b>	<b>172-183</b>
<b>WALL</b>	<b>184-194</b>
<b>GUIDE LIGHTS</b>	<b>195-201</b>
<b>GROUND</b>	<b>202-203</b>
<b>SECURITY &amp; FLOODLIGHTS</b>	<b>136-137</b>





**IP44**

ADJUSTABLE  
HEIGHT

- Polycarbonate construction
- Corrosion resistant
- Three height options:  
1260mm/860mm/460mm



# BIANCA

Post Lantern

 IP44  
Rated
  Class 2

Code	Description	Lamp	Dimensions
CZ-25148-BLK	Bianca Tall Post Lantern (3 Heights)	1 x 10W max LED E27 GLS	W:222mm H:1260mm

IP44



- Polycarbonate construction
- Corrosion resistant

## BIANCA

Triple Head Tall Post Lantern



Code	Description	Lamp	Dimensions
CZ-25149-BLK	Bianca Triple Head Tall Post Lantern	3 x 10W max LED E27 GLS	Dia: 578 H:2216mm

IP44



MANUAL  
OVERRIDE



- Polycarbonate construction
- Corrosion resistant
- 6m Detection Distance
- Manual override function enables you to switch off PIR

## BIANCA

Wall Lantern with PIR



0.84kg

Code	Description	Lamp	Dimensions
CZ-25150-BLK	Bianca Wall Lantern with PIR	1 x 10W max LED E27 GLS	Proj:261mm W:185mm H:402mm



IP44



- Polycarbonate construction
- Corrosion resistant
- 2 alternate installation options

## BIANCA

Up or Down Wall Lantern

IP44 Rated | Class 2 | 0.73kg

Code	Description	Lamp	Dimensions
CZ-25145-BLK	Bianca Up or Down Wall Lantern	1 x 10W max LED E27 GLS	Proj:222mm W:185mm H:402mm

IP44



- Polycarbonate construction
- Corrosion resistant
- Vintage style half lantern
- Available with or without PIR sensor
- 6m Detection Distance

## ATHENA

Half Wall Lantern



IP44  
Rated



PIR  
Sensor



Class 2

Code	Sensor	Description	Lamp	Dimensions
CZ-31748-BLK	-	Athena Wall Lantern	1 x 10W max LED E27 GLS	Proj:110mm W:180mm H:370mm
CZ-26743-BLK	PIR			





NEW

IP54



- Polycarbonate construction
- Corrosion resistant
- Available in 3 finishes

## PILULE

Wall Light



Code	Description	Finish	Lamp	Dimensions
CZ-38639-BLK	Pilule Wall Light	Black	<b>NEW</b>	W:100mm H:245mm Proj:90mm
CZ-38639-WHT		White	<b>NEW</b>	
CZ-38639-ANTH		Anthracite	<b>NEW</b>	

IP44



- ABS & PC construction
- Corrosion resistant

# JURA

Wall Lantern

  
IP44  
Rated

  
Class 1

Code	Description	Lamp	Dimensions
CZ-35742-BLK	Jura Wall Lantern	1 x 10W LED Max E27 GLS	Proj:190mm W:90mm H:225mm

IP44



- Polycarbonate construction
- Corrosion resistant

## YORK

Globe Wall Lantern



Code	Description	Lamp	Dimensions
CZ-31811-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Proj:220mm W:200mm H:253mm

IP44



- Polycarbonate construction
- Corrosion resistant

# YORK

Globe Post Lantern

  
IP44  
Rated

  
Class 2

Code	Description	Lamp	Dimensions
CZ-31812-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Dia:220mm H:405mm

IP44



- Polycarbonate construction
- Corrosion resistant
- Contemporary styling
- Vandal resistant materials

## YORK


Globe Porch Lantern



Code	Description	Lamp	Dimensions
CZ-33461-BLK	York Globe Porch Lantern	1 x 10W max LED E27 GLS	Dia:200mm H:250mm

Upto  
750  
Lumens

IP65

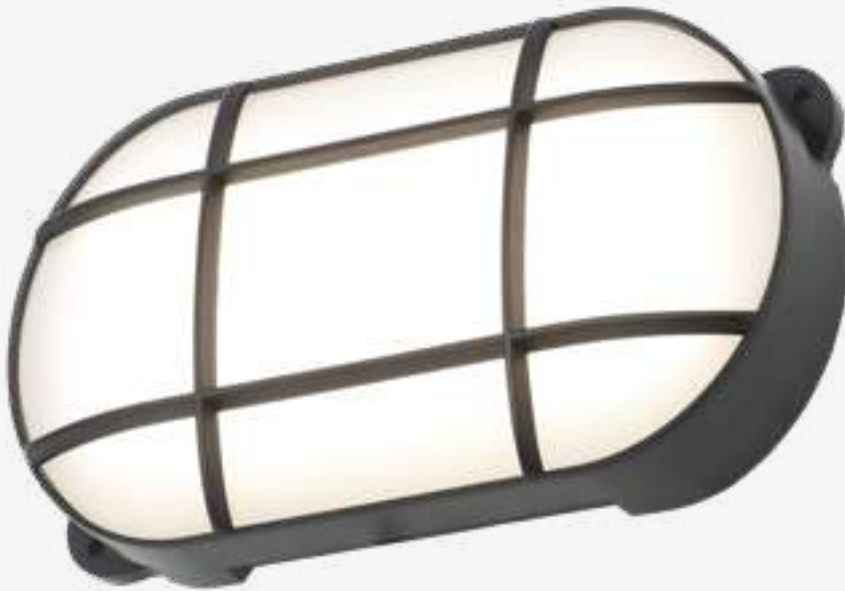

CZ-34027-BLK

- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted (vertical or horizontal)

**CZ-34026-BLK**

- 8W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 50
- Hrs: 25,000

**CZ-34027-BLK**

- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000



CZ-34026-BLK

# CAPELLA

Oval Grid Bulkhead



IP65  
Rated



4000K  
CW



Class 2

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34026-BLK	Small	Capella Oval Grid Bulkhead	8W	4000k	400	50	H:115mm W:160mm Proj:57mm
CZ-34027-BLK	Large		15W	4000k	750	50	H:135mm W:210mm Proj:57mm

750  
Lumens

IP65



- Black PC / Opal diffuser
- Corrosion resistant
- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000

## CAPELLA

Round Grid Bulkhead



IP65  
Rated



4000K  
CW



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34025-BLK	Capella Round Grid Bulkhead	15W	4000k	750	50	Proj:60mm Dia:195mm



IP44



- Polycarbonate construction durable with glass cover
- Corrosion resistant
- Protective grille

## PUCK

Oval Eyelid Bulkhead

IP44 Rated | Class 2 | 1.06kg

Code	Description	Lamp	Dimensions
CZ-25142-BLK	Puck Oval Eyelid Bulkhead	1 x 10W max LED E27 GLS	Proj:110mm W:260mm H:150mm

IP44



- Polycarbonate construction durable with glass cover
- Corrosion resistant
- Protective grille

## MARS

Round Bulkhead

IP44 Rated | Class 2 | 0.69kg

Code	Description	Lamp	Dimensions
CZ-20947-BLK	Mars Round Bulkhead	1 x 10W max LED E27 GLS	Proj:100mm Dia:180mm



CZ-34023-BLK

Upto  
750  
Lumens

IP65



- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted
- 6m Detection Distance

**CZ-33397-BLK**

- 8W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 50
- Hrs: 25,000

**CZ-34023-BLK**

- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000

CZ-33397-BLK

# CANO

LED Round Bulkhead



Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-33397-BLK	Small	Cano Round PIR Bulkhead	8W	4000k	400	50	Proj:57mm Dia:155mm
CZ-34023-BLK	Large		15W	4000k	750	50	Proj:60mm Dia:195mm







Upto  
**1200**  
Lumens



**IP65**



CZ-34015-BLK



CZ-34014-BLK

- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)

## TURUS

LED Round Bulkhead



Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34014-BLK	-	Turus Round Bulkhead	15W	CCT	1200	80	Proj:50mm Dia:170mm
CZ-34015-BLK	PIR	Turus Round Bulkhead	15W	CCT	840	56	Proj:50mm Dia:170mm



Upto  
**1200**  
Lumens



**IP65**



CZ-34017-BLK

- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Lm: 750
- Lm/W: 50
- Hrs: 25,000



CZ-34016-BLK

# TURUS

LED Oval Bulkhead



Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34016-BLK	-	Turus Oval Bulkhead	15W	CCT	1200	80	H:210mm W:115mm Proj:55mm
CZ-34017-BLK	PIR	Turus Oval Bulkhead	15W	CCT	840	56	H:210mm W:115mm Proj:55mm

590  
Lumens

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- K: 4000
- Lm: 590
- Lm/W: 73
- Hrs: 20,000

## OXFORD

Round LED Bulkhead



IP65  
Rated

4000K  
CW

Class 2

0.45kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31750-BLK	Oxford Round Bulkhead	8W	4000k	590	73	Proj:82mm Dia:213mm



510  
Lumens

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- K: 4000
- Lm: 510
- Lm/W: 63
- Hrs: 20,000

## OXFORD

Oval LED Bulkhead



IP65  
Rated



4000K  
CW



Class 2



0.45kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31751-BLK	Oxford Oval Bulkhead	8W	4000k	510	63	H:142mm W: 213mm Proj:79mm

Upto  
**1245**  
Lumens

**IP65**



CZ-31743-BLK

- Polycarbonate construction
- Corrosion resistant
- Can be wall or ceiling mounted

**CZ-31745-BLK**

- 15W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 60
- Hrs: 20,000




**CZ-31743-BLK**

- 18W LED module (SMD)
- K: 4000
- Lm: 1245
- Lm/W: 70
- Hrs: 20,000



CZ-31745-BLK

**RIPON**  
LED Bulkhead

 IP65 Rated  
 4000K CW  
 Class 2

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31745-BLK	Small	Ripon LED Bulkhead	15W	4000k	900	60	Proj:44mm Dia:270mm
CZ-31743-BLK	Large		18W	4000k	1245	70	Proj:44mm Dia:310mm

648  
Lumens

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- 12W LED module (SMD)
- K: 4000
- Lm: 648
- Lm/W: 64
- Hrs: 20,000

## LUTON

LED Wedge



IP65  
Rated

4000K  
CW

Class 2

1.1kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31746-BLK	Luton LED Wedge	12W	4000k	648	64	Proj:99mm W:265mm H:98mm

**1260**  
Lumens

**IP65**



- Polycarbonate and ABS construction
- Corrosion resistant
- Optional Hi-Lo dimmer function
- 21W LED module (SMD)
- K: 4000
- Lm: 1260
- Lm/W: 60
- Hrs: 20,000

## DERBY

LED Wedge with Hi-Lo Dimmer

IP65 Rated | 4000K CW | Class 2 | 1.45kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31740-BLK	Derby LED Wedge with Hi-Lo Dimmer	21W	4000k	1260	60	Proj:139mm W:320mm H:138mm

IP44



- Polycarbonate construction
- Corrosion resistant

# IONA

Up/Down Wall Light

  
IP44  
Rated

  
Class 2

Code	Description	Lamp	Dimensions
CZ-35705-BLK	Iona Up/Down Wall Light	2 x 5W Max LED GU10	Proj:90mm W:70mm H:160mm

IP44



- Polycarbonate construction
- Corrosion resistant

# IONA

Downlight

 IP44  
Rated

 Class 2

Code	Description	Lamp	Dimensions
CZ-35704-BLK	Iona Downlight	1 x 5W Max LED GU10	Proj:90mm W:70mm H:97mm

IP44



- Polycarbonate construction
- Corrosion resistant
- PIR sensor
- 6m Detection Distance

## NESO

Up/Down Wall Light with PIR



IP44  
Rated



PIR  
Sensor



Class 2

Code	Description	Lamp	Dimensions
CZ-31744-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:63mm H:205mm


IP44



- Polycarbonate construction
- Corrosion resistant

# NESO

Up/Down Wall Light



Code	Description	Lamp	Dimensions
CZ-25144-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:86mm W:81mm H:162mm



IP44



- Polycarbonate construction
- Corrosion resistant

## NESO Downlight



Code	Description	Lamp	Dimensions
CZ-25143-BLK	Neso Downlight	1 x 7W Max LED GU10	Proj:86mm W:81mm H:122mm

**NEW**  
COLOUR  
OPTION

**IP44**



- Marine grade stainless steel (316) construction
- Corrosion resistant

# ISLAY

Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
CZ-29320-SST	Islay Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:160mm W:70mm Proj:125mm
CZ-29320-BLK		Black		
CZ-29320-ANTH		Anthracite <b>NEW</b>		



**NEW**  
COLOUR  
OPTION

**IP44**



- Marine grade stainless steel (316) construction
- Corrosion resistant
- PIR sensor
- Adjustable lux and timer
- Detection Angle: 90°
- Detection Distance: 7m

# ISLAY

PIR Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
CZ-29319-SST	Islay PIR Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:200mm W:70mm Proj:125mm
CZ-29319-BLK		Black		
CZ-29319-ANTH		Anthracite <b>NEW</b>		





**NEW**  
COLOUR  
OPTION

**IP44**



- Marine grade stainless steel (316) construction
- Corrosion resistant

# ISLAY Spotlight

 IP44 Rated |  Marine Grade |  Class 1 |  0.5kg

Code	Description	Finish	Lamp	Dimensions
CZ-29321-SST	Islay Spotlight	Stainless Steel	1 x 7W max LED GU10	H:140mm W:70mm Proj:120mm
CZ-29321-BLK		Black		
CZ-29321-ANTH		Anthracite <b>NEW</b>		

**180**  
Lumens

**IP65**



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 2W LED module (SMD)
- K: 4000
- Lm: 180
- Lm/W: 90
- Hrs: 20,000

## BREEZ

Surface Brick/Guide Light

IP65 Rated | 4000K CW | Class 2 | 0.16kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29193-ATR	Breez Surface Brick/Guide Light	2W	4000k	180	90	Proj:30mm Dia:128mm



280  
Lumens

IP65



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 93
- Hrs: 20,000

## BREEZ

Surface Brick/Guide Light

IP65 Rated | 4000K CW | Class 2 | 0.19kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29192-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm





**280**  
Lumens

**IP65**



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 93
- Hrs: 20,000

## BREEZ

Surface Brick/Guide Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29191-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm

590  
Lumens

IP65



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- PIR sensor
- 6m detection range
- 12.5W LED module (SMD)
- K: 4000
- Lm: 590
- Lm/W: 47
- Hrs: 20,000

## POOLE

LED Up/Down Wall Light

PIR Sensor | IP65 Rated | 4000K CW | Class 2 | 0.32kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31747-BLK	Poole Downlight with PIR	5W	4000k	360	72	Proj:51mm W:220mm H:113mm

**590**  
Lumens

**IP65**



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- 12.5W LED module (SMD)
- K: 4000
- Lm: 590
- Lm/W: 47
- Hrs: 20,000

## POOLE

LED Up/Down Wall Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31749-BLK	Poole LED Up/Down Wall Light	12.5W	4000k	590	47	Proj:78mm W:230mm H:110mm



IP44



- Polycarbonate construction
- Corrosion resistant
- Detachable ground spike

## WELLS

Dual Mount Ground/Spike Light

0.4M Cable | IP44 Rated | Class 2 | 0.34kg

Code	Description	Lamp	Dimensions
CZ-31806-BLK	Wells Ground Light	1 x 6W Max LED GU10	Proj:130mm Dia:80mm H:273mm



CZ-34403-BLK



Upto  
**4000**  
Lumens

**IP65**

- removable fast-fit terminal connector



CZ-34402-BLK




CZ-34404-BLK



- fully adjustable & detachable bracket

- Coated aluminium & polycarbonate construction
- Horizontally and vertically adjustable bracket
- Detachable bracket allowing for easy installation
- Removable terminal connector for ease of wiring
- 12m detection range
- Available in 20W / 30W / 50W versions

## FILEY LED Slimline Floodlight



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-34402-BLK	Whitby LED Floodlight	20W LED	1600	0.59kg	H:100mm W:138mm Proj:89mm
CZ-34403-BLK		30W LED	2400	0.59kg	H:128mm W:179mm Proj:119mm
CZ-34404-BLK		50W LED	4000	0.81kg	H:154mm W:214mm Proj:124mm



- removable fast-fit terminal connector




- fully adjustable & detachable bracket

- Coated aluminium & polycarbonate construction
- Horizontally and vertically adjustable bracket
- Detachable bracket allowing for easy installation
- Removable terminal connector for ease of wiring
- 12m detection range
- 20W LED module (SMD)
- K: 4000
- Lm: 1600
- Lm/W: 80
- Hrs: 25,000

## FILEY

LED Slimline Floodlight with PIR



Code	Description	Power (w)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34405-BLK	Filey LED Floodlight	20W LED	1600	80	H:149mm W:138mm Proj:89mm







ELECTRALITE

# COMMERCIAL

Great quality and installer friendly LED Commercial lighting, including our NEW LED range of tapes, downlights, bulkheads and battens.

LED STRIP	208-217
LED STRIP ACCESSORIES	218-223
UNDER CABINET	224
LED BATTENS	225-228
T-GRID LIGHTING	229-231
BULKHEADS	232-234
RECESSED	235-237
EMERGENCY	238-243

# PROFESSIONAL 24V LED STRIPS

**3M** 200MP

3M 200MP high performance acrylic adhesives used on all professional LED strips.

Our high grade 24V LED strips are ideal if you require 5 metres or more in a single length. Built from the highest specification components, they are consistent in brightness and reliability as there is less current. Therefore less voltage drop and less wiring is required. 24V strips or tapes are the choice of the professional installer.

## How to choose an LED strip

### 1. Choose LED type

Choose from White LED (single colour), or RGBW LED (16 selectable colour options). Available in a range of different variants to suit all applications.

### 2. Choose colour temperature

Choose from warm white, cool white and daylight white LED colour temperatures to suit your application. For RGB skip to step 3.

### 3. Choose installation environment

Select the protection you require for the installation environment. Choose from IP65 water resistant LED strip for wet areas or IP20 non water resistant LED strip for dry areas.

### 4. Choose profile

Designed to hold your LED strip, providing diffusion and protection. We offer a range of profiles, including surface mounted, recessed and corner mounted.

### 5. Choose your driver

Calculate the overall wattage of the LED strip to be used. Then select the driver that is higher in wattage than your LED strip (tape).

### 6. Accessories

We offer strip connectors and strip live-end connectors for our full range of LED strip, enabling you to cut and size your strip for any application or even extend LED strip where required.

### 7. Remote control receivers

Remote controlled receivers offer precise and user-friendly control over integral LED strip lighting, allowing you to change the colour and brightness of your room with the touch of a finger.



**560**  
Lumens

**6W**  
LED


**IP20**

**3M**  
200MP

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

**5m**  
**50m**

## IP20 8MM 6W LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34280	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34281	Cool White	4000K	588						
ELA-34282	Daylight White	6000K	569						
ELA-34857	Warm White	2700K	525						50m
ELA-34858	Cool White	4000K	588						
ELA-34859	Daylight White	6000K	569						







**560  
Lumens**

**6W  
LED**


**IP65**

**3M  
200MP**

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

**5m  
50m**

## IP65 8MM 6W LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34283	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34284	Cool White	4000K	588						
ELA-34285	Daylight White	6000K	569						
ELA-34860	Warm White	2700K	525						50m
ELA-34861	Cool White	4000K	588						
ELA-34862	Daylight White	6000K	569						



**1000  
Lumens**

**12W  
LED**

**IP20**


**3M  
200MP**



- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

**5m  
50m**

## IP20 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34290	RGB	IP20	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34871									50m



1000  
Lumens

12W  
LED


IP65

3M  
200MP

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m  
50m

## IP65 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34291	RGB	IP65	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34872									50m








- 1000 Lumens**
- 19.2W LED**
- IP65**
- 3M 200MP**



- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB/CCT remote control & receiver (page .100)

**5m**  
**50m**

## IP65 12MM RGB/CCT 19.2W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34296	RGB/CCT	IP65	1000	19.2W p/m	60	SMD5050	12mm	>80	5m
ELA-34873									50m







**915**  
Lumens

**12W**  
LED

**IP20**


**3M**  
9080A

**5m**  
**50m**

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut every 62.5mm
- More flexible than SMD LED strip
- Spot free lighting array
- Very high colour rendering index producing true light colour RA>90. RA90
- Dimmable with receiver (page .100)



## COB IP20 8MM 12W LED Strip




Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-35750	Warm White	3000K	896	12W p/m	512	COB	8mm	>90	5m
ELA-35751	Cool White	4000K	934						50m
ELA-35752	Warm White	3000K	896						50m
ELA-35753	Cool White	4000K	934						50m

# ALUMINIUM PROFILES



· Fits 8mm, 10mm & 12mm LED Strip

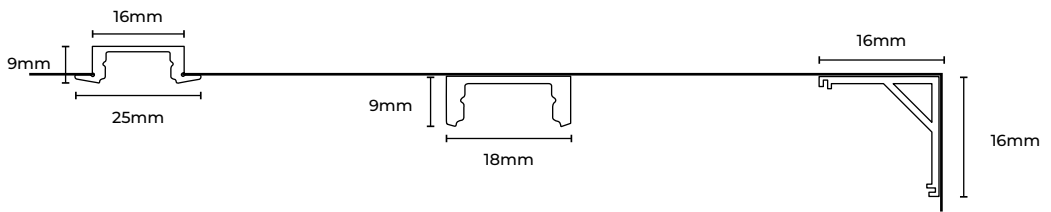

Recessed

Surface-mount

Corner



ELA-34308



ELA-34306



ELA-34307

Code	Description	Dimensions
ELA-34308	Aluminium Recessed Profile	L:2000mm W:25mm Proj:9mm
ELA-34306	Aluminium Surface-mount Profile	L:2000mm W:18mm Proj:9mm
ELA-34307	Aluminium 45° Corner Surface-mount Profile	L:2000mm W:16mm Proj:16mm

# LED DRIVERS

## Constant Voltage

ELA-34302



ELA-34301



ELA-34303



ELA-34300



ELA-34304



Code	Description	Weight	Dimensions
ELA-34300	LED Driver Constant Voltage 24V 36W	0.13kg	H:48mm W:45mm L:140mm
ELA-34301	LED Driver Constant Voltage 24V 60W	0.17kg	H:20mm W:40mm L:140mm
ELA-34302	LED Driver Constant Voltage 24V 100W	0.24kg	H:38mm W:53mm L:192mm
ELA-34303	IP67 LED Driver Constant Voltage 24V 60W	0.42kg	H:30mm W:58mm L:200mm
ELA-34304	IP67 LED Driver Constant Voltage 24V 150W	0.81kg	H:58mm W:82mm L:260mm
ELA-34305	IP67 LED Driver Constant Voltage 24V 200W	0.81kg	H:58mm W:82mm L:260mm

# LED RECEIVERS

## Remote Control

ELA-34286



ELA-34287



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour LED strip
- Smooth dimming and switch without any flickering

ELA-34292



ELA-34293



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour/RGB/RGBW LED strip
- Smooth dimming and switch without any flickering

Code	Description	Dimensions
ELA-34286	1 Channel LED Receiver	H:20mm W:37mm L:115mm
ELA-34287	1 Zone Programmable Remote Control	H:9mm W:59mm L:107mm
ELA-34292	4 Channel RGB/W LED Receiver	H:20mm W:37mm L:115mm
ELA-34293	4 Zones Programmable RGB/W Remote Control	H:9mm W:59mm L:107mm



# RGB/CCT

Controller



- Kit includes Remote and controller
- RF(radio frequency) not IR (infra-red)
- Touch wheel for easy colour change
- RGB & CCT function
- Over 16 million colours to choose from
- Pre-set dynamic mode
- 0-100% brightness
- 30 meter control distance

Code	Description	Dimensions
ELA-34297	RGB/CCT LED Strip Controller & Remote Control	L:120mm W:44mm H:27mm

# LED STRIP CONNECTORS

Solder Free



- Easy installation with click tight connectors
- Connect two strips together, end-to-end to make a longer length
- Run a gap in between your strip lights
- Connect power leads to an LED strip
- Make small connections around corners
- Available in 2 pin (8mm single colour strip), 3 pin (10mm RGB strip) and 6 pin (12mm RGB/CCT strip)
- For use with IP20 LED strip
- LED strip sold separately



Code	Description	Fits
ELA-34288	2 pin Solder free Strip to Wire Live End	8mm LED Strip/Tape
ELA-34289	2 pin Solder free Strip to Strip Connector	8mm LED Strip/Tape
ELA-34294	3pin Solder free Strip to Wire Live End	10mm LED Strip/Tape
ELA-34295	3pin Solder free Strip to Strip Connector	10mm LED Strip/Tape
ELA-34298	6pin Solder free Strip to Wire Live End	12mm LED Strip/Tape
ELA-34299	6pin Solder free Strip to Strip Connector	12mm LED Strip/Tape

# LED STRIP CONNECTORS

Solder Free



- Solder free
- Easy installation
- Clips pierce from under the strip to prevent loosening

Code	Description	Fits
ELA-35747	LED Strip Quick Connector	Single Colour LED Strip
ELA-35748		RGB LED Strip
ELA-35749		RGB/CCT LED Strip
ELA-34874	LED Strip to Strip Corner Connector	8mm Strip
ELA-34875		10mm Strip
ELA-34876		12mm Strip

Upto  
**1200**  
Lumens

**NO  
DRIVER  
REQ.**

- White PC body with opal diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system



Simple to butt connect fittings together

## BUDE

### Under Cabinet Link Light



2M  
Cable



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight	Length	Dimensions
ELA-28418	Bude Link Light	4W LED	3000	400	0.21kg	320mm	L:320mm W:27mm Proj:40mm
ELA-28419		7W LED	3000	700	0.3kg	480mm	L:480mm W:27mm Proj:40mm
ELA-28420		12W LED	3000	1000	0.4kg	880mm	L:880mm W:27mm Proj:40mm
ELA-28421		14W LED	3000	1200	0.59kg	1180mm	L:1180mm W:27mm Proj:40mm
ELA-28414		4W LED	4000	400	0.21kg	320mm	L:320mm W:27mm Proj:40mm
ELA-28415		7W LED	4000	700	0.3kg	480mm	L:480mm W:27mm Proj:40mm
ELA-28416		12W LED	4000	1000	0.4kg	880mm	L:880mm W:27mm Proj:40mm
ELA-28417		14W LED	4000	1200	0.59kg	1180mm	L:1180mm W:27mm Proj:40mm

Upto  
**1200**  
Lumens

**NO  
DRIVER  
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

## RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm

Upto  
**6000**  
Lumens

**NO  
DRIVER  
REQ.**



- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

• 7mm clip

• 20mm clip

## RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	Reno LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm

# RENO

Suspension Kit



Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm





**Upto  
7200  
Lumens**



**FITS**  
RENO  
SUSPENSION  
KIT

**All Versions**

- Polycarbonate body
- High efficiency 100lm/w
- Switch between either 3000K, 4000K or 6000K
- Long life 35,000 hours or 100,000 switching cycles
- Instant full light
- Fast-fit terminal block for easy installation


**Microwave motion sensor**

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

**Emergency**


- 3 hour emergency function

**MECA**  
LED Batten



Code	Emergency / Sensor	Length	Power (W)	Total Flux (lm)	Colour (k)	Efficiency (lm/W)	Beam Angle	CRI
ELA-35692	-							
ELA-35693	Sensor	1200mm	40W	4000	CCT	100	120°	>80
ELA-35694	Emergency							
ELA-35695	Emergency & Sensor							
ELA-35696	-							
ELA-35697	Sensor	1500mm	60W	6000	CCT	100	120°	>80
ELA-35698	Emergency							
ELA-35699	Emergency & Sensor							
ELA-35700	-							
ELA-35701	Sensor	1800mm	72W	7200	CCT	100	120°	>80
ELA-35702	Emergency							
ELA-35703	Emergency & Sensor							

**Upto  
3700  
Lumens**

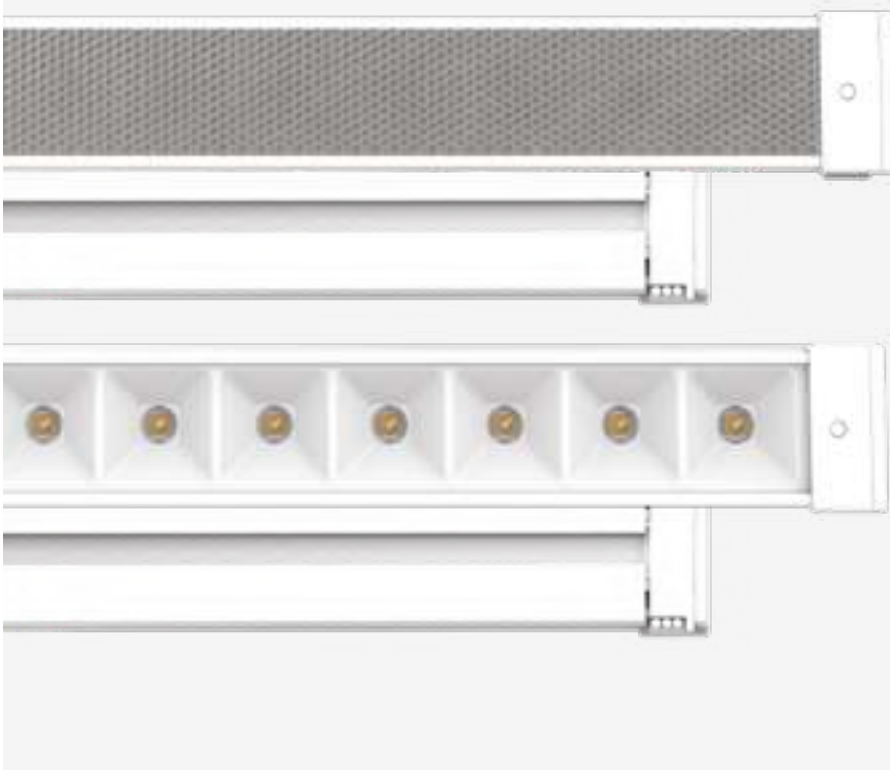

- An innovative lighting fixture that takes the place of LED panels
- Engineered to work with 15mm , 24mm & 25mm T-Grid ceilings
- Simple to install (Up to 60% faster Installation)
- Reduces installation costs
- Even light distribution
- Improves ceiling appearance



## GAMMA

### LED T-Grid Lighting



Code	Description	PCS	Finish	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Length
ELA-35745	14W T-Grid Kit with Driver	2 Pack	Lens	4000k	1764	126	>80	580mm
ELA-35743	15W T-Grid Kit with Driver	2 Pack	Prismatic	4000k	1545	103	>80	
ELA-35746	28W T-Grid Kit with Driver	1 Pack	Lens	4000k	3696	132	>80	1180mm
ELA-35744	30W T-Grid Kit with Driver	1 Pack	Prismatic	4000k	2970	99	>80	



# GAMMA LED T-GRID LIGHTING SOLUTIONS


The Gamma LED T-Grid is an innovative lighting product solution for T-Grid suspension ceilings. Engineered to work with 15mm, 24mm and 25mm T-Grid ceiling structures in order to minimise building materials and waste. Also helping reduce installation costs and improve ceiling appearance.

## Works with different tile edges:

15mm T-Grid Bar




24mm T-Grid Bar



## Remarkable installation savings:

### Installation steps:

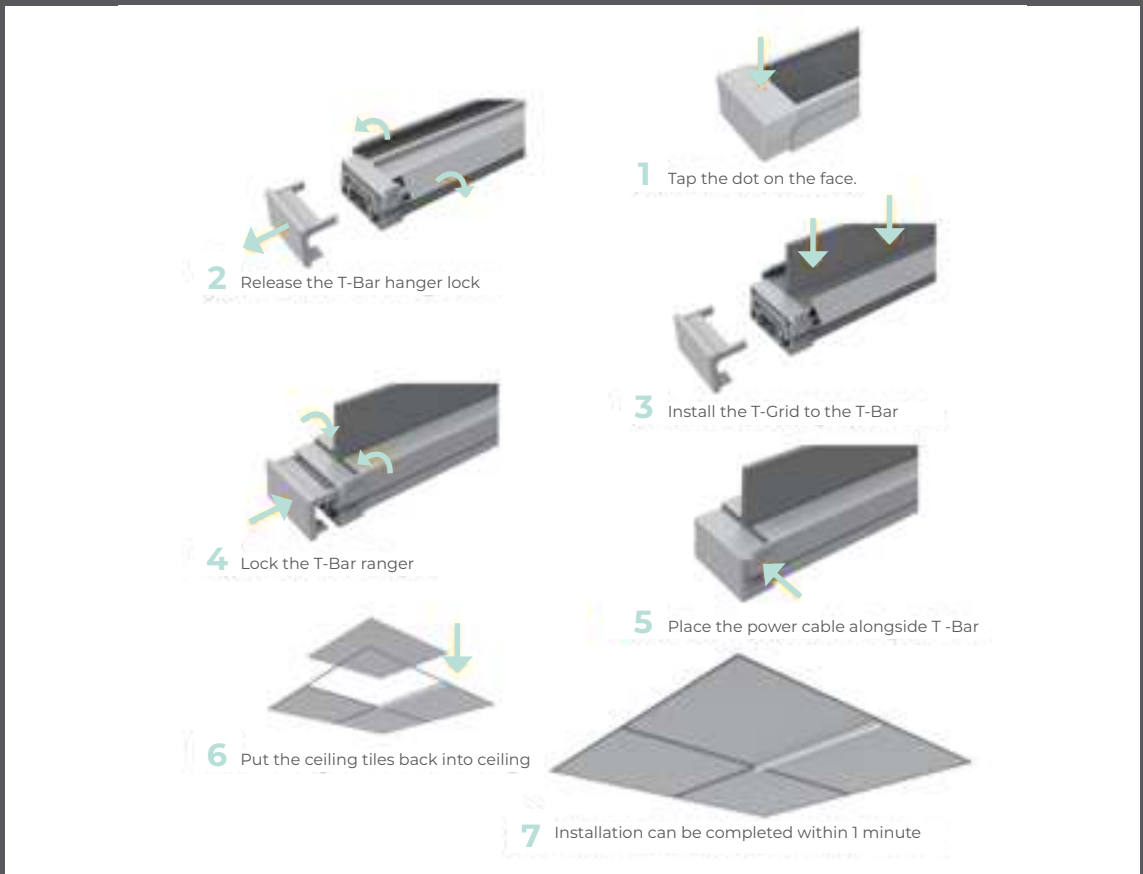





Upto  
**1200**  
Lumens



**IP54**

- White PC body with opal diffuser
- Slimline profile
- Quick release mounting bracket
- Ceiling or wall mounted
- Vandal resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K

**Microwave motion sensor**

- 18W LED module (SMD)
- Lm: 1530
- Lm/W: 85
- Hrs: 25,000

**Microwave motion sensor**

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

**Emergency**

- 3 hour emergency function



# RIGA

LED Bulkhead



Code	Emergency / Sensor	Description	Power (w)	Total Flux (lm)	Dimensions
ELA-34866	-	Riga LED Bulkhead	18W	1530	Proj:50mm Dia:280mm
ELA-34867	Sensor				
ELA-34868	Emergency				
ELA-34869	Emergency & Sensor				



1200  
Lumens



IP54



- White PC body with opal diffuser
- Ceiling or wall mounted
- Vandal resistant
- Silver bezel available
- 14W LED module (SMD)
- K: 4000
- Lm: 1200
- Lm/W: 85
- Hrs: 25,000

#### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

#### Emergency

- Maintained emergency function
- 3 hour emergency function

ELA-28093-CHR



## HALE LED Bulkhead



Emergency  
Backup



Microwave  
Sensor



IK09



IP54  
Rated



4000K  
CW



Class 2



1.13kg

Code	Emergency / Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ELA-28101-OPL	-	Hale LED Bulkhead	14W	4000K	1200	Proj:78mm Dia:315mm
ELA-28102-OPL	Sensor					
ELA-28103-OPL	Emergency					
ELA-28104-OPL	Emergency & Sensor					
ELA-28093-CHR	-	Chrome Trim	-	-	-	Dia:315mm



**FAST  
FIT**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

## YATE

### Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

**FAST  
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

## YATE

Adjustable Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

**FAST  
FIT**

**IP65**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

# YATE

## Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				



**NEW**

**42  
Lumens**

**24M  
VIEWING  
DISTANCE**



- Can be fitted flush/hanging/wall or recessed
- Supplied with UP legend sign
- LEFT/RIGHT legends available separately (ELA-LRLEG38875)
- 2 x DOWN legends available separately (ELA-DLEG38875)
- Maintained/non-maintained
- 3 Hours Emergency Duration
- 3.6V 800mAH NI-CAD Battery
- 4W LED module (SMD)
- K: 6500
- Lm: 42
- Lm/W: 10

## EMERGENCY

### 4 in 1 Exit Blade



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Emergency Duration (hrs)	Dimensions
ELA-38875	White <b>NEW</b>	Emergency 4 in 1 Exit Blade	4W	6500k	42	3	H:195mm W:392mm Proj:26mm

NEW

50  
Lumens

24M  
VIEWING  
DISTANCE



ELA-RLEG-38873



ELA-LLEG-38873



ELA-DLEG-38873



- Supplied with UP legend sign
- LEFT, RIGHT, DOWN legends available separately
- 3 Hours Emergency Duration
- 3.2V 1500mAH NI-CAD Battery
- 4W LED module (SMD)
- K: 6500
- Lm: 50
- Lm/W: 12.5

## EMERGENCY

### Slimline Exit Box



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Emergency Duration (hrs)	Dimensions
ELA-38873	White <b>NEW</b>	Emergency Slimline Exit Box	5W	6500k	600	3	H:195mm W:392mm Proj:26mm

NEW

150  
Lumens



- Maintained/non-maintained
- Green LED Indicator
- 3 Hours Emergency Duration
- 3.6V 1500mAh NI-CAD Battery
- 3W LED module (SMD)
- K: 6000
- Lm: 150
- Lm/W: 50



## EMERGENCY Downlight



34mm  
Cut-out



Emergency  
3 Hrs



IP65  
Rated



6000K  
DW



Class 2

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Emergency Duration (hrs)	Dimensions
ELA-38876	Silver <b>NEW</b>	Emergency Downlight	3W	6000k	150	3	Dia: 42mm Cutout:34mm



**NEW**

**100  
Lumens**

**IP65**

**24M  
VIEWING  
DISTANCE**




- Supplied with ISO 710 sticker set
- Maintained/non-maintained
- 3 Hours Emergency Duration
- 9.5V 1500mAH NI-CAD Battery
- 2W LED module (SMD)
- K: 6500
- Lm: 100
- Lm/W: 50

For illustration purposes only



## EMERGENCY Bulkhead



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Emergency Duration (hrs)	Dimensions
ELA-38874	White <b>NEW</b>	Emergency Bulkhead	2W	6500k	100	3	H:110mm W:352mm Proj:65mm



**NEW**

**450 Lumens**





**IP65**

- Polycarbonate housing & heads
- Maintained/non-maintained
- Charge and discharge protection
- Green LED Indicator
- 3 Hours Emergency Duration
- 9.5V 1500mAH NI-CAD Battery
- 5W LED module (SMD)
- K: 6500
- Lm: 450
- Lm/W: 90



# EMERGENCY

## IP65 Twin Spotlight

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Emergency Duration (hrs)	Dimensions
ELA-38872	White <b>NEW</b>	Emergency Twin IP65 Spotlight	5W	6500k	450	3	H:290mm W:300mm Proj:46.5mm



## BATHROOM

A beautiful range of decorative lighting and mirrors, designed to brighten any bathroom.

<b>NEW RANGE</b>	<b>246-273</b>
<b>COLLECTIONS</b>	<b>274-297</b>
<b>LED</b>	<b>299-307</b>
<b>SPOTLIGHTS</b>	<b>308-314</b>
<b>CEILING</b>	<b>315-325</b>
<b>RECESSED/DOWNLIGHTS</b>	<b>326-332</b>
<b>WALL</b>	<b>333-338</b>
<b>MIRRORS</b>	<b>339-349</b>
<b>SMART TOILETS</b>	<b>350-355</b>


**NEW**

**280  
Lumens**

**IP44**



- Aluminium construction with opal glass shade
- Available in 3 finishes
- 3W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 93
- CRI: 80

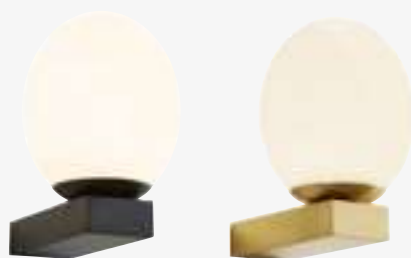

## AGLOS

LED Bathroom Wall Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 1



0.6kg



Available in  
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-38573-TBLK	Textured Black	<b>NEW</b>				
SPA-38573-CHR	Chrome	<b>NEW</b>	3W	4000k	280	H:190mm W:130mm Proj:180mm
SPA-38573-SBRS	Satin Brass	<b>NEW</b>				

NEW

IP44



- Contemporary bathroom wall light
- Available in 3 finishes

## THIVA

Bathroom Wall Light



IP44  
Rated



Class 1



0.5kg



Available in  
3 colour options

Code	Finish		Description	Lamp	Dimensions
SPA-38576-TBLK	Textured Black	NEW	Thiva Bathroom Wall Light	1 x 3W max LED G9	H:165mm W:160mm Proj:165mm
SPA-38576-CHR	Chrome	NEW			
SPA-38576-SBRS	Satin Brass	NEW			

NEW

IP44



- Contemporary bathroom wall light
- Steel construction with glass opal shades

## PARGA

Bathroom Wall Light



Code	Finish		Description	Lamp	Dimensions	Weight
SPA-38574-CHR	Chrome	<b>NEW</b>	Parga 1 Light Wall Light	1 x 3W max LED G9	H:125mm W:135mm Proj:125mm	0.35kg
SPA-38575-CHR	Chrome	<b>NEW</b>	Parga 3 Light Wall Light	3 x 3W max LED G9	H:130mm W:465mm Proj:130mm	1.05kg



NEW

400  
Lumens

IP44



- Crackle effect diffuser
- 5W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 80
- CRI: 80

## RHODES

LED Bathroom Wall Light



IP44  
Rated

4000K  
CW

Class 1

0.4kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36300-CHR	Chrome	<b>NEW</b>	Rhodes LED Wall Light	5W	4000k	400	H:220mm W:100mm Proj:140mm

**NEW**

**800  
Lumens**

**IP44**



- Crackle effect diffuser
- 10W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 80
- CRI: 80

## RHODES

LED Bathroom 2 Light Wall Light



Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36301-CHR	Chrome	<b>NEW</b>	Rhodes LED 2 Light Wall Light	10W	4000k	800	H:220mm W:250mm Proj:140mm

**NEW**

**Upto  
1400  
Lumens**

**IP44**



- Crackle effect diffuser
- Matching wall light available

**SPA-36302-CHR**

- 15W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 60




**SPA-36303-CHR**

- 24W LED module (SMD)
- K: 4000
- Lm: 1400
- Lm/W: 60



# RHODES

LED Ceiling Light

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36302-CHR	Chrome	<b>NEW</b>	Rhodes 3 Light Ceiling Light	15W	4000k	900	H:175mm Dia:430mm	1.15kg
SPA-36303-CHR	Chrome	<b>NEW</b>	Rhodes 5 Light Ceiling Light	24W	4000k	1400	H:175mm Dia:500mm	1.55kg

**NEW**

**500  
Lumens**

**IP44**



- 10W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 50
- CRI: 80

## EDESSA

LED Wall Light



IP44  
Rated



4000K  
CW



Class 1



0.5kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36309-CHR	Chrome	<b>NEW</b>	Edessa LED 2 Light Wall Light	10W	4000k	500	H:225mm W:320mm Proj:50mm

**NEW**

**Upto  
1200  
Lumens**

**IP44**



• Matching wall light available

**SPA-36310-CHR**

- 15W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 53

**SPA-36311-CHR**

- 25W LED module (SMD)
- K: 4000
- Lm: 1200
- Lm/W: 48



# EDESSA

LED Ceiling Light

IP44 Rated | 4000K CW | Class 1

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36310-CHR	Chrome	<b>NEW</b>	Edessa 3 Light Ceiling Light	15W	4000k	800	H:90mm Dia:430mm	0.7kg
SPA-36311-CHR	Chrome	<b>NEW</b>	Edessa 5 Light Ceiling Light	25W	4000k	1200	H:105mm Dia:600mm	1kg

NEW

IP44



- Contemporary bathroom wall light
- Diamond cut glass designed shades

## VOLOS

Wall Light



Code	Finish		Description	Lamp	Dimensions
SPA-35808-CHR	Chrome	<b>NEW</b>	Volos 2 Light Wall Light	2 x 3W max LED G9	H:280mm W:150mm Proj:110mm

NEW

IP44



- Contemporary bathroom ceiling light
- Diamond cut glass designed shades

## VOLOS

Ceiling Light



Code	Finish		Description	Lamp	Dimensions	Weight
SPA-35782-CHR	Chrome	NEW	Volos 3 Light Ceiling Light	3 x 3W max LED G9	H:140mm Dia:360mm	1.15kg
SPA-35783-CHR	Chrome	NEW	Volos 5 Light Ceiling Light	5 x 3W max LED G9	H:152mm Dia:520mm	2.05kg



NEW

IP44



- Available in satin brass/champagne glass or chrome/smoked glass

## PATRAS

3 Light Plate Ceiling Light



IP44  
Rated



Class 2



1.05kg

Code	Finish	Description	Lamp	Dimensions
SPA-35809-CHAMP	Satin Brass/Champagne <b>NEW</b>	Patras 3 Light Plate Ceiling Light	3 x 3W max LED G9	H:115mm Dia:230mm
SPA-35809-CHR	Chrome/Smoke <b>NEW</b>			

NEW

IP44



- Available in satin brass/champagne glass or chrome/smoked glass

## PATRAS

### 4 Light Bar Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35810-CHAMP	Satin Brass/Champagne	<b>NEW</b>	4 x 3W max LED G9	H:115mm W:460mm Proj:100mm
SPA-35810-CHR	Chrome/Smoke	<b>NEW</b>		

NEW

IP44



- Available in satin brass/champagne glass or chrome/smoked glass

## PATRAS

2 Light Wall Light



IP44  
Rated



Class 2



0.35kg

Code	Finish	Description	Lamp	Dimensions
SPA-35811-CHAMP	Satin Brass/Champagne <b>NEW</b>	Patras 2 Light Wall Light	2 x 3W max LED G9	H:188mm W:110mm Proj:135mm
SPA-35811-CHR	Chrome/Smoke <b>NEW</b>			

NEW

IP44



- Twisted style glass shades
- Available in satin brass or chrome

## VERIA

2 Light Wall Light



IP44  
Rated



Class 1



0.4kg

Code	Finish		Description	Lamp	Dimensions
SPA-35810-SBRS	Satin Brass/Clear	<b>NEW</b>	Veria 2 Light Wall Light	2 x 3W max LED G9	H:320mm W:245mm Proj:155mm
SPA-35810-CHR	Chrome/Smoke	<b>NEW</b>			

NEW

IP44



- Twisted style glass shades
- Available in satin brass or chrome

## VERIA

### 3 Light Ceiling Light



Code	Finish		Description	Lamp	Dimensions
SPA-35828-SBRS	Satin Brass/Clear	<b>NEW</b>	Veria 3 Light Ceiling Light	3 x 3W max LED G9	H:175mm Dia:480mm
SPA-35828-CHR	Chrome/Smoke	<b>NEW</b>			

NEW

IP44



- Twisted style glass shades
- Available in satin brass or chrome

## VERIA

### 5 Light Ceiling Light



Code	Finish		Description	Lamp	Dimensions
SPA-35829-SBRS	Satin Brass/Clear	<b>NEW</b>	Veria 5 Light Ceiling Light	3 x 3W max LED G9	H:185mm Dia:460mm
SPA-35829-CHR	Chrome/Smoke	<b>NEW</b>			

NEW

IP44



· Available in chrome or satin brass

## LINDOS

3 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35836-CHR	Chrome/Smoke <b>NEW</b>	Lindos 3 Light Ceiling Light	3 x 3W max LED G9	H:265mm Dia:380mm
SPA-35836-SBRS	Satin Brass/Opal <b>NEW</b>			

NEW

IP44



· Available in chrome or satin brass

## LINDOS

5 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35837-CHR	Chrome/Smoke <b>NEW</b>	Lindos 5 Light Ceiling Light	5 x 3W max LED G9	H:265mm Dia:380mm
SPA-35837-SBRS	Satin Brass/Opal <b>NEW</b>			



NEW

IP44



· Available in chrome or satin brass

## LINDOS

2 Light Wall Light



Code	Finish	Description	Lamp	Dimensions
SPA-35838-CHR	Chrome/Smoke <b>NEW</b>	Lindos 2 Light Wall Light	2 x 3W max LED G9	H:335mm W:205mm Proj:105mm
SPA-35838-SBRS	Satin Brass/Opal <b>NEW</b>			

NEW

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

## MEGARA

Wall Light



IP44  
Rated

Class 1

0.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-35842-CLR	Chrome/Clear <b>NEW</b>	Megara Wall Light	1 x 3W max LED G9	H:175mm W:110mm Proj:165mm
SPA-35842-SMK	Chrome/Smoke <b>NEW</b>			

NEW

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

## MEGARA

### 3 Light Ceiling Light



IP44  
Rated



Class 2



1.3kg

Code	Finish		Description	Lamp	Dimensions
SPA-35840-CLR	Chrome/Clear	<b>NEW</b>	Megara 3 Light Ceiling Light	3 x 3W max LED G9	H:125mm Dia:280mm
SPA-35840-SMK	Chrome/Smoke	<b>NEW</b>			

NEW

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

## MEGARA

5 Light Ceiling Light



IP44  
Rated



Class 2



2.15kg

Code	Finish	Description	Lamp	Dimensions
SPA-35841-CLR	Chrome/Clear <b>NEW</b>	Megara 5 Light Ceiling Light	5 x 3W max LED G9	H:130mm Dia:357mm
SPA-35841-SMK	Chrome/Smoke <b>NEW</b>			

NEW

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

## MEGARA

2 Light Cloche Ceiling Light



IP44  
Rated



Class 2



1.3kg

Code	Finish	Description	Lamp	Dimensions
SPA-35839-CLR	Chrome/Clear <b>NEW</b>	Megara 2 Light Cloche Ceiling Light	2 x 3W max LED G9	H:197mm Dia:250mm
SPA-35839-SMK	Chrome/Smoke <b>NEW</b>			

NEW

IP44



· Available in chrome or satin brass

## SPARTI

Wall Light



Code	Finish		Description	Lamp	Dimensions
SPA-35843-CHR	Chrome	<b>NEW</b>	Sparti Wall Light	1 x 3W max LED G9	H:267mm W:110mm Proj:120mm
SPA-35843-SBRS	Satin Brass	<b>NEW</b>			

NEW

1000  
Lumens

IP44



- 30W LED module (SMD)
- K: 4000
- Lm: 1000
- Lm/W: 33
- CRI: 80

## LAMIA

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



0.75kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36128-SBRS	Satin Brass	<b>NEW</b>	Lamia LED Ceiling Light	30W	4000k	1000	H:100mm Dia:580mm

NEW

900  
Lumens

IP44



- 26W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 34
- CRI: 80

## CHIOS

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



0.8kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36129-CHR	Chrome	<b>NEW</b>	Chios LED Ceiling Light	26W	4000k	900	H:60mm Dia:400mm



NEW

1000  
Lumens

IP44



- 32W LED module (SMD)
- K: 4000
- Lm: 1100
- Lm/W: 34
- CRI: 80

## DAFNI

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



1.2kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36130-MBLK	Matt Black	<b>NEW</b>	Dafni LED Ceiling Light	32W	4000k	1100	H:210mm W:845mm L:240mm

NEW

400  
Lumens

IP44



- 11W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 36
- CRI: 80

## MANDRA

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



0.6kg

Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36140-CHR	Chrome	<b>NEW</b>	Mandra LED Ceiling Light	11W	4000k	400	H:130mm Dia:340mm



IP44



- Chrome finish
- Decorative chiselled glass droplets

# BELLE

4 Light Chandelier

IP44 Rated | Class 1 | 7.1kg

Code	Description	Lamp	Dimensions
SPA-24677-CHR	Belle 4 Light Chandelier	4 x 3W max LED C9	H:1140mm Dia:450mm

IP44



- Chrome finish
- Decorative chiselled glass droplets

## BELLE

3 Light Semi Flush



IP44  
Rated



Class 1



3.5kg

Code	Description	Lamp	Dimensions
SPA-24678-CHR	Belle 3 Light Semi-flush	3 x 3W max LED C9	H:398mm Dia:300mm

IP44



- Chrome finish
- Clear crystal shades
- Adjustable chain length

## PEGASI

9 Light Chandelier



IP44  
Rated



Class 1



6.5kg

Code	Description	Lamp	Dimensions
SPA-33929-CHR	Pegasi 9 Light Chandelier	9 x 3W max LED C9	H:1200mm Dia:550mm



IP44



- Chrome finish
- Clear crystal shades

## PEGASI

5 Light Flush Chandelier



Code	Description	Lamp	Weight	Dimensions
SPA-33930-CHR	Pegasi 5 Light Flush	5 x 3W max LED G9	3.58kg	H:390mm Dia:480mm



IP44



- Chrome finish
- Clear crystal shades

## PEGASI

3 Light Flush Chandelier

IP44  
Rated

Class 1

Code	Description	Lamp	Dimensions
SPA-33974-CHR	Pegasi 3 Light Semi-flush	3 x 3W max LED G9	H:370mm Dia:440mm

IP44



SPA-33931-CHR



SPA-33932-CHR

- Chrome finish
- Clear crystal shades


## PEGASI Wall Light



Code	Description	Lamp	Weight	Dimensions
SPA-33931-CHR	Pegasi Shield Wall Light	1 x 3W max LED G9	1.25kg	H:200mm W:160mm Proj:82mm
SPA-33932-CHR	Pegasi Wall Light	1 x 3W max LED G9	0.77kg	H:195mm W:110mm Proj:175mm



IP44



- Clear glass crystal droplets
- Available in chrome & brass

## VELA

### 9 Light Chandelier



IP44  
Rated




Class 1



6.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-19714-CHR	Chrome	Vela 9 Light Chandelier	9 x 3W max LED G9	H:1060mm Dia:580mm
SPA-19714-BRS	Brass			

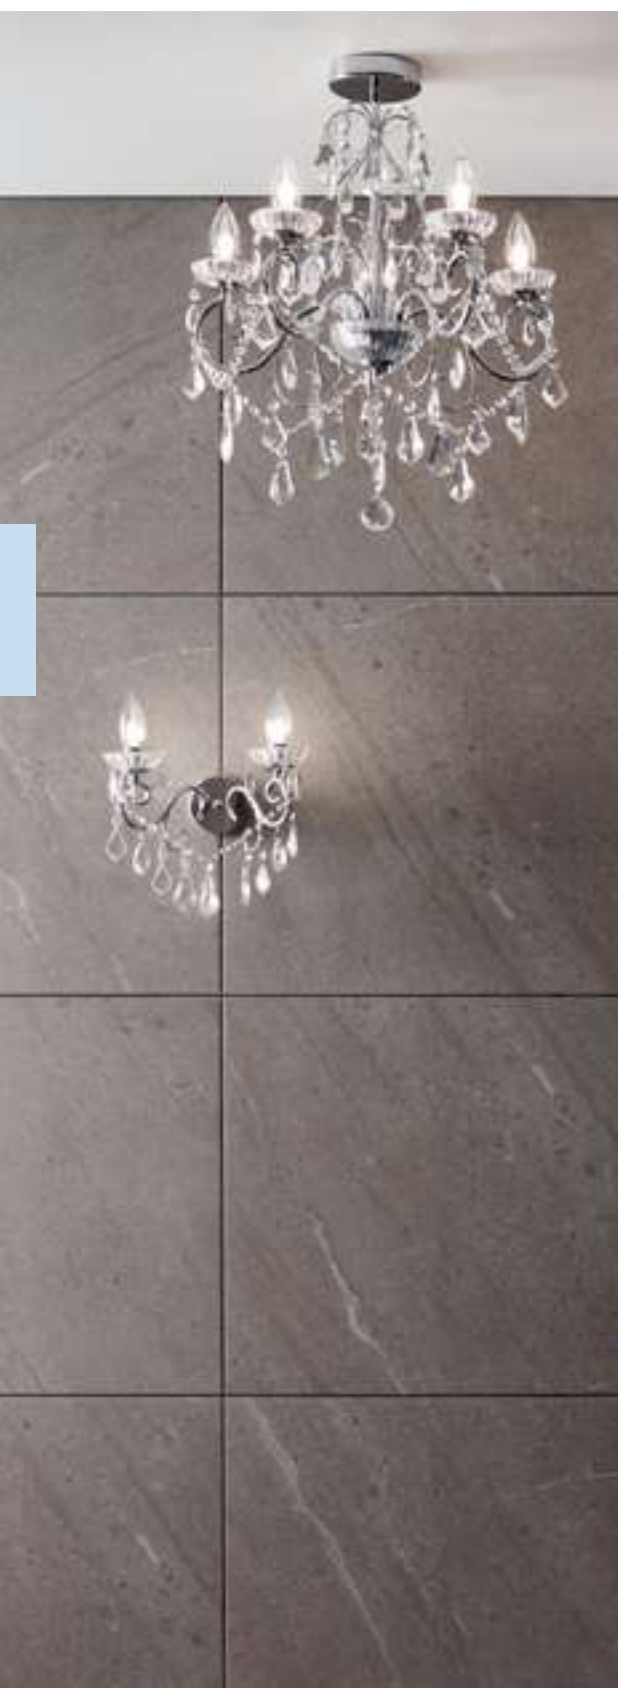

IP44



- Clear glass crystal droplets
- Available in chrome & brass

## VELA

Flush Chandelier



IP44  
Rated



Class 1



3.9kg

Code	Finish	Description	Lamp	Dimensions
SPA-19713-CHR	Chrome	Vela 5 Light Flush	5 x 3W max LED G9	H:620mm Dia:500mm
SPA-19713-BRS	Brass			

IP44



- Clear glass crystal droplets
- Available in chrome & brass

## VELA

Flush Chandelier



IP44  
Rated



Class 1



2.6kg

Code	Finish	Description	Lamp	Dimensions
SPA-20182-CHR	Chrome	Vela 3 Light Flush	3 x 3W max LED G9	H:520mm Dia:450mm
SPA-20182-BRS	Brass			



IP44



- Clear glass crystal droplets
- Available in chrome & brass

## VELA

Wall Light



IP44  
Rated



Class 1



2.6kg

Code	Finish	Description	Lamp	Dimensions
SPA-20831-CHR	Chrome	Vela Wall Light	2 x 3W max LED G9	Proj:170mm W:285mm H:335mm
SPA-20831-BRS	Brass			



3  
SIZES  
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

# CELESTE

## Flush



Code	Finish	Description	Lamp	Dimensions
SPA-24869-CHR	Chrome	Celeste 4 Light Flush	4 x 3W max LED G9	H:260mm Dia:230mm
SPA-24870-CHR		Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-CHR		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm
SPA-24869-BRS	Brass	Celeste 4 Light Flush	4 x 3W max LED G9	H:260mm Dia:230mm
SPA-24870-BRS		Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-BRS		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm

2  
SIZES  
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

# ORLANDO

Flush

 IP44  
Rated  Class 1

Code	Finish	Description	Lamp	Weight	Dimensions
SPA-24468-CHR	Chrome	Orlando 4 Light Flush	4 x 3W max LED G9	2.36kg	L:230mm W:230mm H:189mm
SPA-24468-BRS	Brass				
SPA-24467-CHR	Chrome	Orlando 5 Light Flush	5 x 3W max LED G9	4kg	L:300mm W:300mm H:227mm
SPA-24467-BRS	Brass				



IP44



- Chrome finish
- Bulb covers

# REENA

Ceiling/Wall Light



Code	Description	Lamp	Weight	Dimensions
SPA-28327-CHR	Reena 6 Light Flush	6 x 3W max LED G9	4.4kg	H:220mm Dia:660mm
SPA-28326-CHR	Reena 3 Light Flush	3 x 3W max LED G9	1.7kg	H:190mm Dia:410mm
SPA-29195-CHR	Reena Wall Light	2 x 3W max LED G9	1.0kg	Proj:138mm W:270mm H:140mm



IP44



- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass

# GENE

Ceiling Light

 IP44 Rated  
 Class 1  
 1.58kg

Code	Finish	Description	Lamp	Dimensions
SPA-31726-CHR	Chrome	Gene Cylinder Ceiling Light	3 x 3W max LED G9	H:379mm Dia:424mm
SPA-31726-SATBRS	Satin Brass			



IP44



- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass

# GENE

Wall Light

 IP44 Rated  
 Class 1  
 0.55kg

Code	Finish	Description	Lamp	Dimensions
SPA-31725-CHR	Chrome	Gene Cylinder Wall Light	1 x 3W max LED G9	H:205mm W:100mm Proj:165mm
SPA-31725-SATBRS	Satin Brass			



IP44



- Polycarbonate opal shade
- Matching items available
- Available in 3 finishes

# PORTO

## Wall Light





Code	Finish	Description	Lamp	Dimensions
SPA-31306-CHR	Chrome	Porto 1 Light Wall Light	1 x 3W max LED G9	H:230mm W:120mm Proj:174mm
SPA-31306-MBLK	Matt Black			
SPA-31306-SBRS	Brass			

IP44



- Polycarbonate opal shade
- Matching items available
- Available in 3 finishes

# PORTO

Semi Flush

 IP44 Rated  
 Class 1  
 0.95kg

Code	Finish	Description	Lamp	Dimensions
SPA-31309-CHR	Chrome	Porto 1 Light Semi-Flush	1 x 10W max LED E27 GLS	H:340mm Dia:250mm
SPA-31309-MBLK	Matt Black			
SPA-31309-SBRS	Brass			

IP44



- Decorative tubular shades
- Available in 3 finishes

# CRUX

## 3 Light Ceiling Fitting

IP44 Rated | Class 1 | 1.25kg

Code	Finish	Description	Lamp	Dimensions
SPA-20829-CHR	Chrome	Crux 3 Light Ceiling Fitting	3 x 3W max LED G9	H:225mm Dia:350mm
SPA-20829-MBLK	Matt Black			
SPA-20829-SATBRS	Satin Brass			

350  
Lumens

IP44



- 5W LED module (SMD)
- K: 4000
- Lm: 350
- Lm/W: 70
- CRI: 80
- Hrs: 20,000

## BUBBLE

LED Spotlight



IP44  
Rated



4000K  
CW



Class 1



0.56kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30781-CHR	Bubble LED Spotlight	5W	3000k	350	70	Proj:140mm W:110mm H:130mm

960  
Lumens

IP44



- 15W LED module (SMD)
- K: 3000
- Lm: 960
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

## MILAN

LED 3 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31733-CHR	Milan 3 Light Spotlight Plate	15W	3000k	960	64	L:255mm W:290mm H:120mm

320  
Lumens

IP44



- 5W LED module (SMD)
- K: 3000
- Lm: 320
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

## MILAN

LED Spotlight



IP44  
Rated



3000K  
WW



Class 1



0.9kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31732-CHR	Milan Spotlight	5W	3000k	320	64	Proj:115mm W:85mm H:120mm

1800  
Lumens

IP44



- 40W LED module (SMD)
- K: 3000
- Lm: 1800
- Lm/W: 45
- CRI: 80
- Hrs: 20,000

## OSLO

Crackle LED 4 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31731	Oslo 8 Ceiling Fitting	40W	3000k	1800	74	H:105mm W:250mm L:330mm

740  
Lumens

IP44



- 10W LED module (SMD)
- K: 3000
- Lm: 740
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

## OSLO

Crackle LED Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31730	Oslo Wall Light	10W	3000k	740	74	H:150mm W:90mm Proj:105mm



1480  
Lumens

IP44



- 20W LED module (SMD)
- K: 4000
- Lm: 1480
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

## FELIX

Bubble LED 4 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31780-CHR	Felix Bubble 4 Light Bar	20W	4000k	1480	74	L:774mm W:80mm H:140mm

**1100**  
Lumens

**IP44**



- 15W LED module (SMD)
- K: 4000
- Lm: 1100
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

## FELIX

Bubble LED 3 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31735-CHR	Felix 3 Light Bubble Spotlight	15W	4000k	1100	74	H:115mm Dia:200mm

**1350**  
Lumens

**IP44**



- Chrome finish with opal acrylic diffusers
- 20W LED module (SMD)
- K: 4000
- Lm: 1350
- Lm/W: 67
- CRI: 80
- Hrs: 20,000

## AMALFI

LED 4 Light Bar



IP44  
Rated



4000K  
CW



Class 2



1.17kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31737-CHR	Amalfi 4 Light Bar	20W	4000k	1350	67	L:530mm W:110mm H:65mm

**950**  
Lumens

**IP44**



- Chrome finish with opal acrylic diffusers
- 15W LED module (SMD)
- K: 4000
- Lm: 950
- Lm/W: 63
- CRI: 80
- Hrs: 20,000

# AMALFI

LED 3 Light Flush

IP44 Rated | 4000K CW | Class 2 | 1.14kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31736-CHR	Amalfi 3 Light Flush	15W	4000k	950	63	H:65mm Dia:250mm

IP44



- Chrome finish
- Directable spotlights

## FREYA

### 3 Light Spotlight



Code	Description	Lamp	Dimensions
SPA-35080-CHR	Freya 3 Light Spotlight	3 x 7W max LED GU10	H:140mm W:280mm L:220mm

IP44



- Chrome finish
- Directable spotlights



## FREYA

4 Light Bar Spotlight



IP44  
Rated



Class 1



1.25kg

Code	Description	Lamp	Dimensions
SPA-35081-CHR	Freya 4 Light Bar Spotlight	4 x 7W max LED GU10	H:140mm W:620mm L:80mm



IP44



- Available in 3 finishes
- Directable spotlights

## SCORPIUS

### 4 Light Bar Spotlight



IP44  
Rated

Class 1

2.26kg

Code	Finish	Description	Lamp	Dimensions
SPA-22560-CHR	Chrome	Scorpius 4 Light Bar Spotlight	4 x 7W max LED GU10	L:620mm W:80mm H:140mm
SPA-22560-MBLK	Matt Black			
SPA-22560-BRS	Brass			



IP44



- Available in 3 finishes
- Directable spotlights



## SCORPIUS

### 3 Light Spotlight



Code	Finish	Description	Lamp	Dimensions
SPA-27405-CHR	Chrome	Scorpilus 3 Light Spotlight	3 x 7W max LED GU10	L:280mm W:220mm H:140mm
SPA-27405-MBLK	Matt Black			
SPA-27405-BRS	Brass			

IP44



- Directable spotlights

## SCORPIUS

2 Light Bar Spotlight



Code	Description	Lamp	Weight	Dimensions
SPA-31292-CHR	Scorpius 2 Light bar	2 x 7W max LED GU10	1.02kg	L:250mm W:80mm H:140mm

IP44



- Directable spotlights

## SCORPIUS

Spotlight



Code	Description	Lamp	Dimensions
SPA-27401-CHR	Scorpius Spotlight	1 x 7W max LED GU10	H:170mm W:100mm Proj:150mm

IP44



- Frosted glass
- Soft glow lighting

## CARINA

Flush Ceiling Fitting

IP44 Rated | Class 1 | 0.95kg

Code	Description	Lamp	Dimensions
SPA-AS-2831-CHR	Carina Flush Ceiling Fitting	1 x 10W max LED E27 GLS Bulb	H:88mm Dia:370mm



**Upto  
950  
Lumens**

**IP44**

**2  
SIZES  
AVAILABLE**

- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

**Small - 180mm**

- 12W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 50
- Hrs: 20,000


**Large - 310mm**

- 18W LED module (SMD)
- K: 4000
- Lm: 2140
- Lm/W: 50
- Hrs: 20,000



# DELPHI

## LED Flush



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-34046-CHR	Chrome	Delphi Small LED Flush	12W	4000k	1500	50	>80	H:55mm Dia:180mm
SPA-34046-SNIC	Satin Nickel							
SPA-34046-BRS	Brass							
SPA-34046-SATBLK	Satin Black							
SPA-34047-CHR	Chrome	Delphi Large LED Flush	18W	4000k	2140	50	>80	H:85mm Dia:310mm
SPA-34047-SNIC	Satin Nickel							
SPA-34047-BRS	Brass							
SPA-34047-SATBLK	Satin Black							



IP44

2  
SIZES  
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options


## DELPHI Flush




Code	Finish	Description	Lamp	Dimensions
SPA-34049-CHR	Chrome	Delphi Small Flush	1 x 28W Max E14 Candle	H:55mm Dia:180mm
SPA-34049-SNIC	Satin Nickel			
SPA-34049-BRS	Brass			
SPA-34049-SATBLK	Satin Black			
SPA-34050-CHR	Chrome	Delphi Large Flush	2 x 28W Max E27 GLS	H:85mm Dia:310mm
SPA-34050-SNIC	Satin Nickel			
SPA-34050-BRS	Brass			
SPA-34050-SATBLK	Satin Black			

# TAURI MULTI-FUNCTION LED WALL/CEILING LIGHT

The 5 in 1 multi-function light can be installed recessed, or surface mounted on either the ceiling or wall. It has 3CCT technology switchable between 3000K, 4000K and 6000K. The bracket is easily adjustable to fit different cut sizes. Only 15mm in thickness and available in a standard white finish. Chrome and satin nickel bezels available.

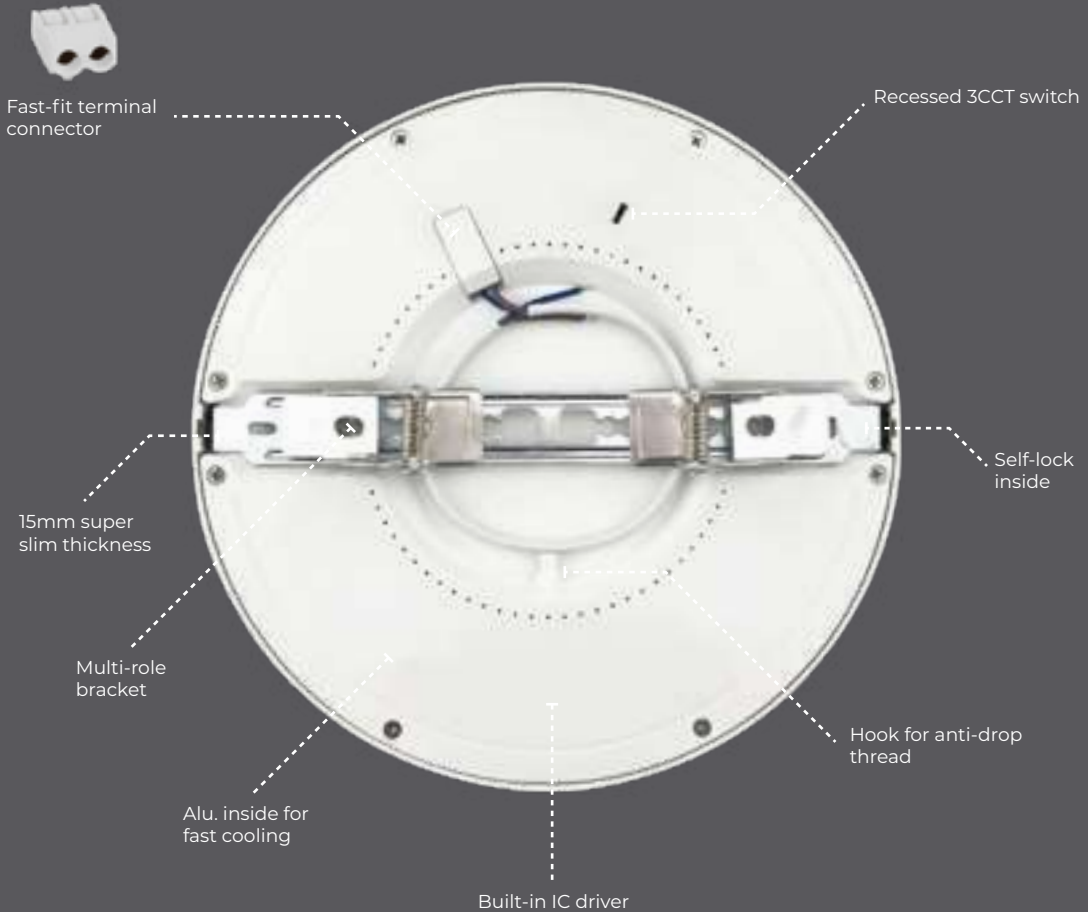

## Slideable spring multi-role bracket

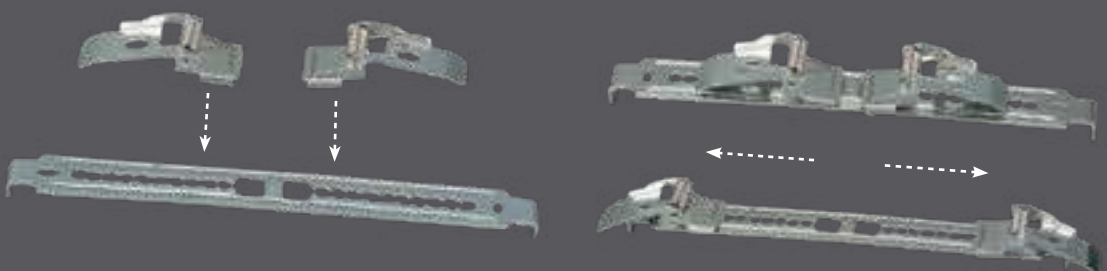



**600  
Lumens**



**IP54**



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

## TAURI

### 6W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34008-WHT	White	Tauri LED Light	6W LED	600	0.3kg	H:15mm Dia:139mm
SPA-34010-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 6W model)	-	-	0.11kg	H:15mm Dia:139mm
SPA-34012-CHR	Chrome					
SPA-35711-SBLK	Satin Black					
SPA-35712-SBRS	Satin Brass					







**1200  
Lumens**



**IP54**



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K

• Multi-role bracket and CCT switch

## TAURI

### 12W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35709	White	Tauri LED Light	12W LED	1200	0.42kg	H:15mm Dia:164mm
SPA-35713	Satin Nickel	Tauri Magnetic Ring (Fits 12W model)	-	-	0.17kg	H:15mm Dia:164mm
SPA-35716	Chrome					
SPA-35714	Satin Black					
SPA-35715	Satin Brass					



1800  
Lumens



IP54



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

## TAURI

### 18W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34009-WHT	White	Tauri LED Light	18W LED	1800	0.58kg	H:15mm Dia:217mm
SPA-34011-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 18W model)	-	-	0.21kg	H:15mm Dia:217mm
SPA-34013-CHR	Chrome					
SPA-35717	Satin Black					
SPA-35718	Satin Brass					



2400  
Lumens



IP54



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

## TAURI

### 24W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35710	White	Tauri LED Light	24W LED	2400	0.66kg	H:15mm Dia:290mm
SPA-35719	Satin Nickel	Tauri Magnetic Ring (Fits 24W model)	-	-	0.27kg	H:15mm Dia:290mm
SPA-35722	Chrome					
SPA-35720	Satin Black					
SPA-35721	Satin Brass					

1200  
Lumens



IP54



- White PC body with opal diffuser
- Ceiling or wall mounted
- Vandal resistant
- Silver bezel available
- 14W LED module (SMD)
- K: 4000
- Lm: 1200
- Lm/W: 85
- Hrs: 25,000

#### Microwave motion sensor

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

#### Emergency

- Maintained emergency function
- 3 hour emergency function

ELA-28093-CHR



## HALE LED Bulkhead



Emergency  
Backup



Microwave  
Sensor



IK09



IP54  
Rated



4000K  
CW



Class 2



1.13kg

Code	Emergency / Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ELA-28101-OPL	-	Hale LED Bulkhead	14W	4000K	1200	Proj:78mm Dia:315mm
ELA-28102-OPL	Sensor					
ELA-28103-OPL	Emergency					
ELA-28104-OPL	Emergency & Sensor					
ELA-28093-CHR	-	Chrome Trim	-	-	-	Dia:315mm



Upto  
**1200  
Lumens**

**CCT**



**IP54**



- White PC body with opal diffuser
- Slimline profile
- Quick release mounting bracket
- Ceiling or wall mounted
- Vandal resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K

**Microwave motion sensor**

- 18W LED module (SMD)
- Lm: 1530
- Lm/W: 85
- Hrs: 25,000








**Microwave motion sensor**

- 30-150 detection angle
- 6m detection range
- 3-2000 lux adjustable

**Emergency**

- 3 hour emergency function

**RIGA**  
LED Bulkhead

Code	Emergency / Sensor	Description	Power (w)	Total Flux (lm)	Dimensions
ELA-34866	-	Riga LED Bulkhead	18W	1530	Proj:50mm Dia:280mm
ELA-34867	Sensor				
ELA-34868	Emergency				
ELA-34869	Emergency & Sensor				

**NEW**

**500 Lumens**

**IP65**

**FAST FIT**










- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



# COMO


## IP65 Tiltable Fire-rated Downlight

-  Fire-rated
-  IP65 Rated
-  60° Beam
-  70mm Cut-out
-  4000K CW
-  Class 2
-  0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
38570/38571-ACOP	Single / 3 Pack	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
38570/38571-BCHR		Black Chrome					
38570/38571-CHR		Chrome					
38570/38571-MWHT		Matt White					
38570/38571-SBLK		Satin Black					
38570/38571-SBRS		Satin Brass					
38570/38571-SNIC		Satin nickel					





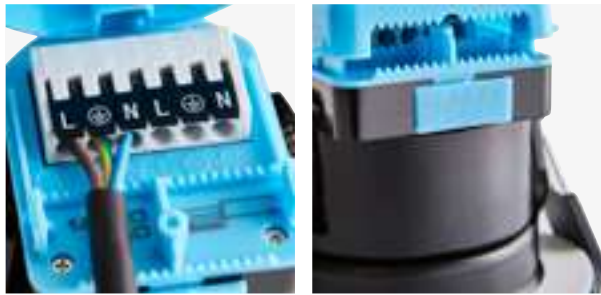




- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000



# RHOM

## IP65 Fixed Fire-rated Downlight

 Fire-rated |
  IP65 Rated |
  60° Beam |
  70mm Cut-out |
  CCT |
  Class 2 |
  0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					



**NEW**  
COLOUR  
OPTION

**IP65**



Tilted







Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

## CALI

### Tiltable Downlight

 IP65 Rated
  78mm Cut-out
  Class 2
  0.16kg

Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper <b>NEW</b>	1 x 7W max LED GU10	Dia:92mm H:115mm Cutout:78mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

NEW

IP65



Tilted



Fixed




- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



## CALI

Square Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP		Brushed Copper		
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK	Cali Square Tiltable Downlight	Matt Black	1 x 7W max LED GU10	L:82mm W:82mm H:115mm  Cutout:78mm
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

**FAST  
FIT**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

## YATE

### Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

**FAST  
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

## YATE

Adjustable Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

**FAST  
FIT**

**IP65**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

# YATE

## Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				

IP44



- Chrome finish
- Pull switch

# AQUARIUS

Wall Light

IP44 Rated | Class 1 | 0.55kg

Code	Description	Lamp	Dimensions
SPA-PR17146-CHR	Aquarius Wall Light	1 x 3W max LED G9	Proj:180mm W:110mm H:220mm

IP44



- Chrome finish
- Pull switch

## ARIES

2 Light Wall Light

 IP44  
Rated

 Class 1

 0.8kg

Code	Description	Lamp	Dimensions
SPA-PR12744-CHR	Aries 2 Light Wall Light	2 x 3W max LED G9	Proj:115mm W:360mm H:60mm

IP44



- Available in chrome & satin brass
- Pull switch

# CORVUS

## Wall Light

 IP44 Rated  
 Class 1  
 0.5kg

Code	Finish	Description	Lamp	Dimensions
SPA-6888.014-CHR	Chrome	Corvus Wall Light	2 x 3W max LED G9	W:205mm H:105mm Proj:155mm
SPA-6888.014-SATBRS	Satin Brass			





**395**  
Lumens

**IP44**

- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



## CHAI

Picture/Mirror Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:40mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						

IP44



- Available in 3 finishes
- Pull switch

# ARA

## Hollywood 5 Light Bar Wall Light

IP44 Rated | Class 1 | 2kg

Code	Finish	Description	Lamp	Dimensions
SPA-PR13145-CHR	Chrome	Ara 5 Light Wall Light	5 x 3W max LED G9	W:680mm H:80mm Proj:110mm
SPA-PR13145-MBLK	Matt Black			
SPA-PR13145-SATBRS	Satin Brass			

**1100**  
Lumens

**IP44**



- Integrated shaver socket
- Bathroom zone 2
- Polycarbonate construction
- 12W LED module (SMD)
- K: 4000
- Lm: 1100
- Lm/W: 91
- CRI: 80
- Hrs: 20,000



## **BARI** Shaver Light



Shaver  
Socket



IP44  
Rated



4000K  
CW



Class 1




0.6kg

Code	Description	Lamp	Lumen	Dimensions
SPA-36920-CHR	Bari Shaver Light	12W LED	1100	H:50mm W:490mm Proj:61mm

356  
Lumens



IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Integrated shaver socket
- Can be mounted landscape or portrait
- 12W LED module (SMD)
- K: 5000
- Lm: 356
- Lm/W: 29

# ECTI

## Illuminated Bathroom Mirror

 Shaver Socket	 IP44 Rated	 5000K DW	 Class 1	 6.65kg
---	--	--	--	---

Code	Description	Lamp	Dimensions
SPA-34035	Ecti Illuminated Bathroom Mirror	12W LED	H:700mm W:500mm Proj:56mm

763  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 16W LED module (SMD)
- K: 5000
- Lm: 763
- Lm/W: 47



# FLEC

Illuminated Bathroom Mirror



Demist Pad



IP44 Rated



5000K DW



Class 1



8.95kg

Code	Description	Lamp	Dimensions
SPA-34036	Flec Illuminated Bathroom Mirror	16W LED	H:800mm W:600mm Proj:33mm

504  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 18W LED module (SMD)
- K: 5000
- Lm: 504
- Lm/W: 18



# REF

Illuminated Bathroom Mirror

Demist Pad | IP44 Rated | 5000K DW | Class 1 | 6.3kg

Code	Description	Lamp	Dimensions
SPA-34037	Ref Illuminated Bathroom Mirror	18W LED	H:700mm W:500mm Proj:46mm

1337  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 22W LED module (SMD)
- K: 5000
- Lm: 1337
- Lm/W: 60



## NOR

Illuminated Bathroom Mirror



Demist  
Pad



IP44  
Rated



5000K  
DW



Class 1



6.7kg

Code	Description	Lamp	Dimensions
SPA-34038	Nor Illuminated Bathroom Mirror	22W LED	H:800mm W:600mm Proj:46mm

296  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Can be mounted landscape or portrait
- 8W LED module (SMD)
- K: 5000
- Lm: 296
- Lm/W: 60



# ION

Illuminated Bathroom Mirror

IP44 Rated | 5000K DW | Class 1 | 3.7kg

Code	Description	Lamp	Dimensions
SPA-34039	Ion Illuminated Bathroom Mirror	8W LED	H:500mm W:400mm Proj:46mm





1690  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch sensor switch
- 12W LED module (SMD)
- K: 5000
- Lm: 1690
- Lm/W: 140

## NYX Illuminated Bathroom Mirror



Touch  
Switch



IP44  
Rated



5000K  
DW



Class 1



6.9kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35706	Nyx Illuminated Mirror	12W	5000k	1690	140	>80	Dia:600mm Proj:35mm





**2190**  
Lumens

**IP44**



- Soft close hinged single door
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2190
- Lm/W: 64



# ARTE

## Illuminated Bathroom Mirror Cabinet



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35707	Arte Illuminated Single Door Mirrored Cabinet	34W	5000k	2190	64	>80	W:500mm H:700mm Proj:130mm





**2190**  
Lumens

**IP44**



- Soft close hinged double doors
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2190
- Lm/W: 64




## HYM Illuminated Bathroom Mirror Cabinet



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35708	Hym Illuminated 2 Door Mirrored Cabinet	34W	5000k	2500	73.5	>80	W:600mm H:800mm Proj:130mm

NEW

IPX4

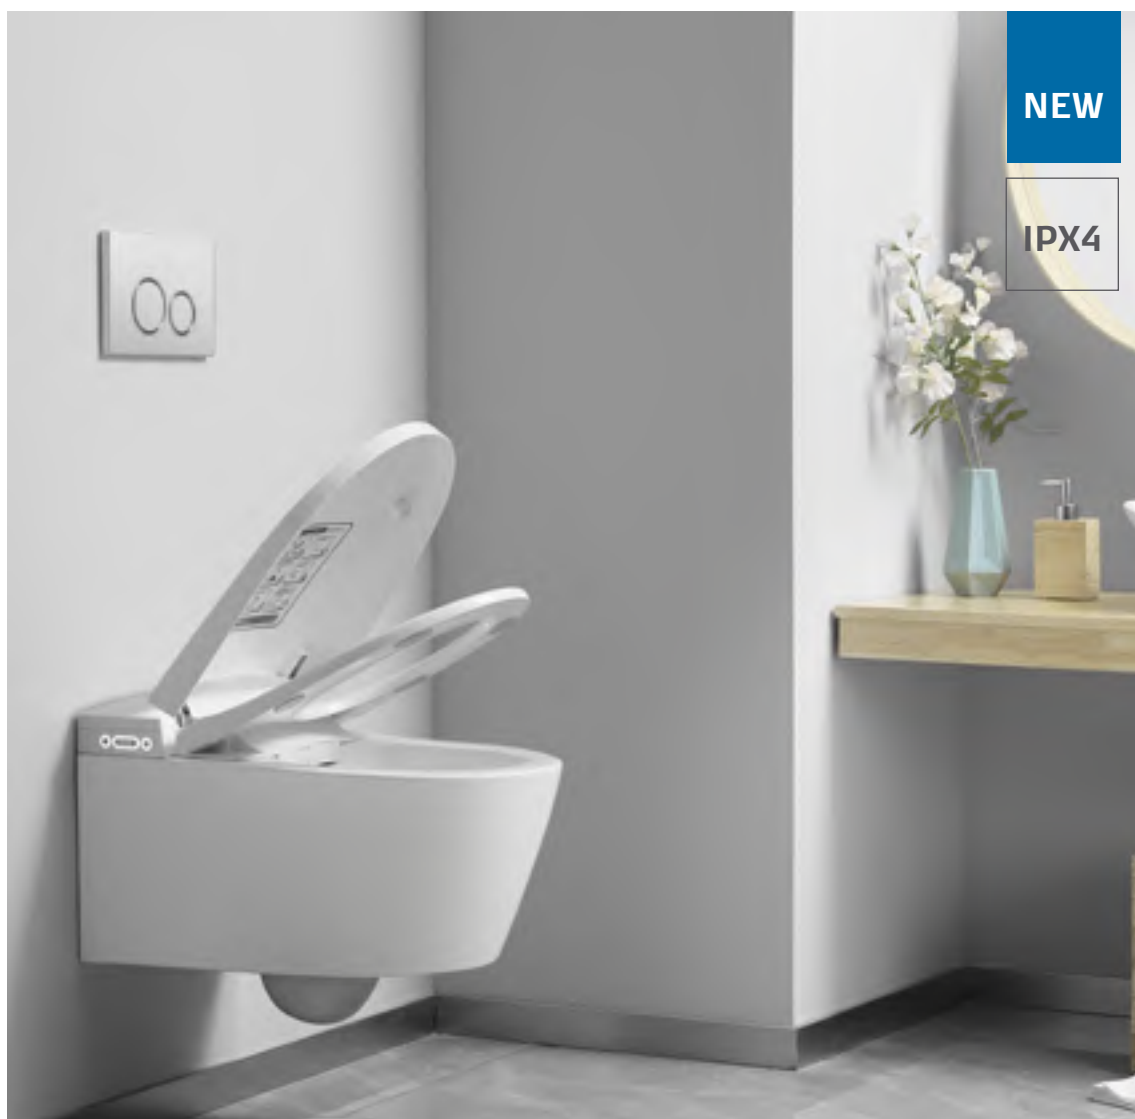

- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Automatic opening and closing seat cover
- Integral LED night light
- Ceramic toilet bowl

## WALL MOUNT

### Smart Toilet



Code	Description	Finish	Material	Dimensions
SPA-37153	Wall Mount Smart Toilet	White	Ceramic	L::598mm x W:380mm x H:332mm

NEW

IPX4



- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Automatic Opening and closing seat cover
- Integral LED night light
- Ceramic toilet bowl

## FLOOR STANDING

Smart Toilet



Code	Description	Finish	Material	Dimensions
SPA-37152	Floor Standing Smart Toilet	White	Ceramic	L:670mm x W:418mm x H:480mm





IP67



Remote control operated

Warm air dryer

Soft-close lid

Auto-deodorisation

Heated seat

Warm water cleansing

Self-cleaning nozzle

- Heated seat with five adjustable temperature settings
- Wireless control panel. Remote controlled and easy to operate
- UV LED lighting illuminates the bowl to serve as a night-light
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorisation with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation



- Includes fused spur and fixing kit

## MITO

Electric Bidet Toilet Seat




Code	Description	Finish	Material	Dimensions
SPA-34864	Electric Bidet Toilet Seat	White	Plastic	H:190mm W:470mm L:520mm



**IP67**



- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorisation with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation

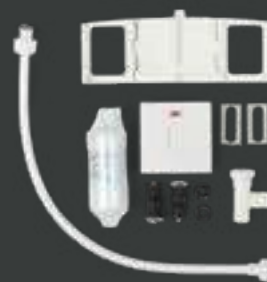

- Includes fused spur and fixing kit

# MITO

## Electric Bidet Toilet Seat



Code	Description	Finish	Material	Dimensions
SPA-34865	Electric Bidet Toilet Seat	White	Plastic	H:180mm W:435mm L:485mm



Spa<sup>PRO</sup>

## PREMIUM

Spa PRO beautifully designed, premium glass decorative lighting that will bring a touch of glamour to any home.

COLLECTIONS

358-369

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Small 3 Light Flush



Code	Description	Lamp	Dimensions
SP-25204-CHR	Bresna 3 Light Flush	3 x 3W max LED G9	H:350mm Dia:350mm

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Small 3 Light Flush



Code	Description	Lamp	Dimensions
SP-31450-CHR	Bresna Small 3 Light Flush	3 x 3W max LED C9	H:350mm Dia:280mm



IP44



- Chrome finish
- Clear crystal shades

## BRESNA

6 Light Flush



Code	Description	Lamp	Dimensions
SP-25201-CHR	Bresna 6 Light Flush	6 x 3W max LED G9	H:398mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

6 Light Pendant



Code	Description	Lamp	Dimensions
SP-25202-CHR	Bresna 6 Light Pendant	6 x 3W max LED G9	H:1200mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Wall Light



Code	Description	Lamp	Dimensions
SP-25203-CHR	Bresna Wall Light	2 x 3W max LED G9	Proj:175mm W:300mm H:200mm

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

Wall Light



Code	Description	Lamp	Dimensions
SP-25253-CHR	Annalee Wall Light	2 x 3W max LED G9	Proj:156mm W:297mm H:420mm

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

3 Light Chandelier

IP44  
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-31449-CHR	Annalee 3 Light Chandelier	3 x 3W max LED G9	H:1520mm Dia:450mm

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

Small 5 Light Chandelier

IP44  
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25256-CHR	Annalee 5 Light Chandelier	5 x 3W max LED G9	H:1000mm Dia:385mm

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

5 Light Chandelier



Code	Description	Lamp	Dimensions
SP-25254-CHR	Annalee 5 Light Chandelier	5 x 3W max LED C9	H:1580mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

8 Light Chandelier



Code	Description	Lamp	Dimensions
SP-25255-CHR	Annalee 8 Light Chandelier	8 x 3W max LED C9	H:1650mm Dia:400mm





IP44



- Chrome finish
- Clear crystal shades

## NORE

Small Encased Flush



Code	Description	Lamp	Dimensions
SP-25211-CHR	Nore Small Encased Flush	5 x 3W max LED C9	H:300mm Dia:400mm



## KITCHEN

A range of modern LED kitchen lighting, including tape, under cabinet lights, link lights and plinth lights.

<b>UNDER CABINET</b>	<b>372-383</b>
<b>KINETIC SWITCHES</b>	<b>384-385</b>
<b>KONECT PLUG &amp; PLAY</b>	<b>386-396</b>
<b>SOCKETS/QI CHARGING</b>	<b>397-398</b>
<b>TRACK LIGHTING</b>	<b>399-405</b>
<b>LED BATTENS</b>	<b>406-408</b>
<b>PLINTH LIGHTING</b>	<b>409-411</b>

Upto  
**150**  
Lumens


**NO  
DRIVER  
REQ.**



- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100

## POZZA

### Recessed LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25317	Pozza Under Cabinet Light	1.5W LED	3000	130	Dia:65mm Proj:20mm
CUL-21624	Pozza Under Cabinet Light	1.5W LED	4000	140	Dia:65mm Proj:20mm

**Upto  
150  
Lumens**

**NO  
DRIVER  
REQ.**



- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100

## **LAGHETTO** LED Under Cabinet Light



120°  
Beam



1M  
Cable



Class 2



0.14kg

Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25318	Laghetto Under Cabinet Light	1.5W LED	3000	130	Dia:75mm Proj:26mm
CUL-21625	Laghetto Under Cabinet Light	1.5W LED	4000	140	Dia:75mm Proj:26mm
CUL-25218	Laghetto Under Cabinet Light	1.5W LED	6000	150	Dia:75mm Proj:26mm





**Upto  
150  
Lumens**

**NO  
DRIVER  
REQ.**

**WARM WHITE  
3000K**


**COOL WHITE  
4000K**

**DAYLIGHT WHITE  
6000K**

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100



## **FONTE** LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25319	Fonte Under Cabinet Light	1.5W LED	3000	130	H:126mm W:145mm Proj:32mm
CUL-21626	Fonte Under Cabinet Light	1.5W LED	4000	140	H:126mm W:145mm Proj:32mm
CUL-25219	Fonte Under Cabinet Light	1.5W LED	6000	150	H:126mm W:145mm Proj:32mm

Upto  
**150**  
Lumens

**NO  
DRIVER  
REQ.**



- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100

## LAGO

LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25320	Lago Under Cabinet Light	1.5W LED	3000	130	H:142mm W:80mm Proj:32mm
CUL-21627	Lago Under Cabinet Light	1.5W LED	4000	140	H:142mm W:80mm Proj:32mm
CUL-25220	Lago Under Cabinet Light	1.5W LED	6000	150	H:142mm W:80mm Proj:32mm



120  
Lumens



NO  
DRIVER  
REQ.



- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 120
- Lm/W: 80

## ELLEN

LED Round Under Cabinet Light



120°  
Beam



1M  
Cable



CCT



Class 2

Code	Description	Lamp	Lumen	Dimensions
CUL-35860	Ellen Round LED CCT Under Cabinet Light	1.5W LED	120	Dia:75mm Proj:29mm

120  
Lumens



NO  
DRIVER  
REQ.



- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 120
- Lm/W: 80

## FARO

LED Triangle Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35861	Faro Triangle LED CCT Under Cabinet Light	1.5W LED	120	H:122mm W:142mm Proj:36mm



180  
Lumens



NO  
DRIVER  
REQ.

WARM WHITE  
3000K

COOL WHITE  
4000K

DAYLIGHT WHITE  
6000K

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included
- 3W LED module (SMD)
- Lm: 180
- Lm/W: 60



## ARGI

LED Round Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35864	Argi Round LED CCT Under Cabinet Light	3W LED	180	Dia:75mm H:29mm

180  
Lumens



NO  
DRIVER  
REQ.



- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1m cable included
- 3W LED module (SMD)
- Lm: 180
- Lm/W: 60

## AYLA

LED Triangle Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35865	Ayla Triangle LED CCT Under Cabinet Light	3W LED	180	H:122mm W:142mm Proj:36mm



## LEGARE

LINK LEAD

2  
SIZES  
AVAILABLE



- Enables you to connect 2 legare or bude link lights on the same circuit
- Available in 2 lengths


Code	Length
CUL-21665	0.5 meters
CUL-21665	1 meter

Upto  
**1200  
Lumens**

**NO  
DRIVER  
REQ.**



- SMD LED
- Silver aluminium body with opal polycarbonate diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system

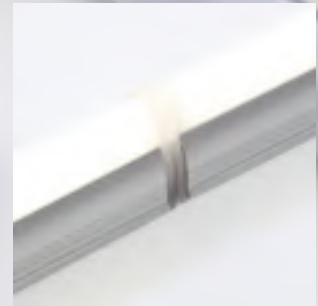

Simple to butt connect fittings together

## LEGARE

### Under Cabinet Link Light



Class 2

Code	Description	Power (w)	Kelvin	Lumen	Weight	Length	Dimensions
CUL-25321	Legare Under Cabinet Link Light	4W LED	3000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-25322		7W LED	3000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-25323		12W LED	3000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-25324		14W LED	3000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm
CUL-21661		4W LED	4000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-21662		7W LED	4000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-21663		12W LED	4000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-21664		14W LED	4000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm




Upto  
**1200**  
Lumens



**NO  
DRIVER  
REQ.**

- Silver aluminium body with opal polycarbonate diffuser
- Switch between 3000K/OFF/4000K
- No driver required
- Supplied with 2m power lead
- Simple connection system



- Simple to butt connect fittings together

## LEGARE

### CCT Under Cabinet Link Light



Code	Description	Lamp	Lumen	Weight	Length	Dimensions
CUL-34223-CCT	Legare CCT Link Light	4W LED	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-34224-CCT	Legare CCT Link Light	7W LED	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-34225-CCT	Legare CCT Link Light	12W LED	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-34226-CCT	Legare CCT Link Light	14W LED	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm



**NEW**

**Upto  
350  
Lumens**



- Ideal for multiple applications
- No wiring required
- PIR sensor with 3M detection distance
- AUTO ON/ALWAYS ON/OFF function
- 4 hours charge time

# RECHARGEABLE

## Under Cabinet Light



Code	Power (w)	Colour (k)	Total Flux (lm)	Battery	Run Time	Dimensions
CUL-37386 <b>NEW</b>	1W	4000k	90	750mAh Li-ion	4 Hours	L:200mm W:40mm H:9mm
CUL-37387 <b>NEW</b>	2W	4000k	160	1100mAh Li-ion	5 Hours	L:400mm W:40mm H:9mm
CUL-37388 <b>NEW</b>	3W	4000k	230	1500mAh Li-ion	5 Hours	L:564mm W:40mm H:9mm
CUL-37389 <b>NEW</b>	4W	4000k	350	2200mAh Li-ion	5 Hours	L:864mm W:40mm H:9mm



# KINETIC WIRELESS SWITCHING



## KINETIC SYSTEM OVERVIEW



Push switch to create kinetic energy



Internal module collects kinetic energy



Kinetic energy is converted into electricity



Communication module transmits signal



Receiver controls light and switches on/off

The wireless switch uses micro-energy acquisition technology. Kinetic energy is generated to create and transmit a radio signal to the receiver which in turn, will switch lamps or other loads on or off.

There is no longer the constraint of wiring location and no need to install back boxes or cut holes into walls. The kinetic switch can be installed anywhere or placed to maximise convenience.

Lighting can be controlled manually by using the switch, smart phone or tablet using the Smart Life App or connecting it to a voice controlled device such as Amazon Alexa or Google Home.

The kinetic switches require no wiring or batteries which eliminates the need for installing back boxes, creating channels in walls and adjusting decor, thus speeding up the installation process and reducing labour time & costs.

The switch can be installed anywhere in the home, including the bathroom due to its IP67 rating. The switches can be screwed to the surface, or stuck on with the adhesive pads supplied. They can also be retro-fit onto existing back boxes as they are the same size as standard switches.

# KINETIC SWITCHES

NEW



## 1 GANG SWITCH

- IP67 rated
- Dimmable when used with CUL-37836 receiver

Code	Description	Finish
CUL-37832	1 gang self powered wall switch	White



## 2 GANG SWITCH

- IP67 rated
- Dimmable when used with CUL-37836 receiver

Code	Description	Finish
CUL-37833	2 gang self powered wall switch	White



## 3 GANG SWITCH

- IP67 rated
- Dimmable when used with CUL-37836 receiver

Code	Description	Finish
CUL-37834	3 gang self powered wall switch	White



## WIFI RECEIVER

- Can be controlled by a smartphone APP (iPhone and Android)
- Load capacity: 1A

Code	Description	Finish
CUL-37835	Wifi Receiver	White




## DIMMABLE WIFI RECEIVER

- Can be controlled by a smartphone APP (iPhone and Android)
- Load capacity: 5A

Code	Description	Finish
CUL-37836	Dimmable Wifi Receiver	White



## PLUG & PLAY SYSTEM

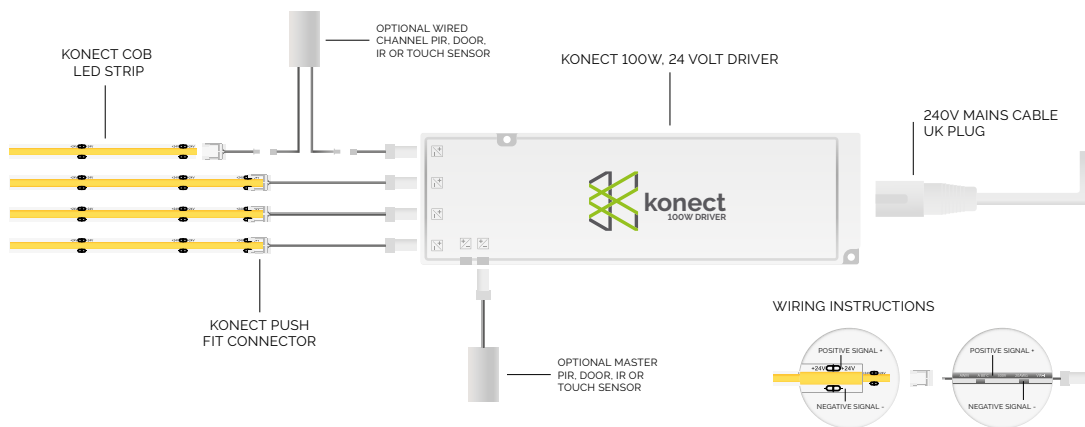

The Konec plug and play system features revolutionary wiresafe technology. Designed to protect all ports from overloading, short circuits and electrical surges, ensuring lighting systems stay as safe as possible. In turn conforming to BS7671 Regulations.

The new Konec connectors on each components are designed to only fit into the respective ports further enhancing safety. Offering this balance of maximum safety and simplicity means less need for electrical qualifications on installation, saving you time and money on your next lighting project.

We have a range of drivers with a range of up to 7 connection ports and can power up to 100 watts worth of LED Lights in one 24 Volt lighting system. Full customisable with UK plugs available in 3 lengths, extension cables and a range of lighting you will be sure to find something suitable for your needs.




**NEW**

**350 Lumens**




- Brushed steel finish
- 5W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

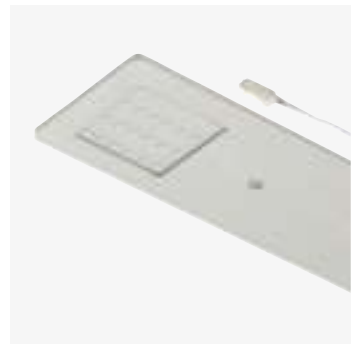

## SLIMLINE

Under Cabinet Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37797	Brushed Steel <b>NEW</b>	Slimline Under Cabinet Spotlight	5W	3000k	350	L:190mm x W:70mm Proj:4mm
CUL-37798	Brushed Steel <b>NEW</b>			4000k		



**NEW**


**150 Lumens**



- Brushed steel finish
- Designed for surface mounting or recessed
- 1.8W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



## RECESSED/SURFACE Under Cabinet Spotlight



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37795	Brushed Steel <b>NEW</b>	Recessed/Surface Under Cabinet Spotlight	1.8W	3000k	150	Dia:65mm H:10mm
CUL-37796	Brushed Steel <b>NEW</b>			4000k		



**NEW**

**Upto  
460  
Lumens**



- Infrared sensor ideal for kitchen drawers and wardrobes
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konekt drivers
- Easy to install



## IR MINI

### Under Cabinet/Drawer Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37787	Brushed Steel <b>NEW</b>	IR Mini Under Cabinet/Drawer Light	3.5W	3000k	220	L:563mm x W:13mm Proj:15.5mm
CUL-37788	Brushed Steel <b>NEW</b>			4000k		
CUL-37789	Brushed Steel <b>NEW</b>	IR Mini Under Cabinet/Drawer Light	5.2W	3000k	460	L:863mm x W:13mm Proj:15.5mm
CUL-37790	Brushed Steel <b>NEW</b>			4000k		




**NEW**

**Upto  
934  
Lumens**



- Flexible 12W/m LED COB tape
- CRI: >90
- Can be cut every 60mm
- 5m roll
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Requires power cord
- Easy to install

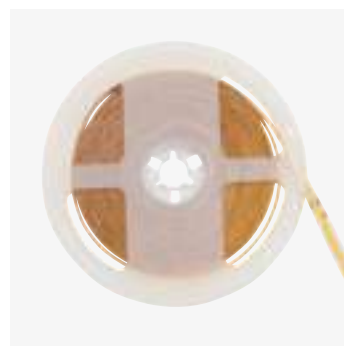

## 8MM LED COB Flexible Strip



Code	Description	Power (w)	Colour (k)	CRI	Total Flux (lm)	Length
ELA-35750	<b>NEW</b> 8mm LED COB Flexible Strip	12W/m	3000k	>90	150	5m
ELA-37551	<b>NEW</b>		4000k	>90		



**NEW**


**100  
Lumens**



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



# ROUND Plinth Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37791	Matt Silver <b>NEW</b>	Round Plinth Light	1.2W	3000k	100	Dia:35mm H:13.5mm
CUL-37792	Matt Silver <b>NEW</b>			4000k		





**NEW**


**100  
Lumens**



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



# SQUARE Plinth Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37793	Matt Silver <b>NEW</b>	Square Plinth Light	1.2W	3000k	100	L:35mm W:35mm H:13.5mm
CUL-37794	Matt Silver <b>NEW</b>			4000k		

## 18W/24V DRIVER/CONVERTER



**NEW**



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37767	<b>NEW</b> AC200-240V	24V	18W	3 ports	L:120mm W:36mm H:15.8mm

## 24W/24V DRIVER/CONVERTER



**NEW**



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37768	<b>NEW</b> AC200-240V	24V	24W	5 ports	L:138mm W:55mm H:18mm

## 36W/24V DRIVER/CONVERTER



**NEW**



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37769	<b>NEW</b> AC200-240V	24V	36W	5 ports	L:148mm W:55mm H:18mm

## 60W/24V DRIVER/CONVERTER



**NEW**



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37770 <b>NEW</b>	AC200-240V	24V	60W	7 ports	L:189mm W:55mm H:15mm

## 100W/24V DRIVER/CONVERTER



**NEW**



- Plug & Play with Konect sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37771 <b>NEW</b>	AC200-240V	24V	100W	7 ports	L:239mm W:56mm H:18mm

## MICRO DISTRIBUTOR



**NEW**




- Connect up to 6 accessories using 1 port from your driver

Code	Connector	Cable Length	Output Sockets	Dimensions
CUL-37786 <b>NEW</b>	Micro24	140mm	6 ports	L:60mm W:45mm H:45mm

# KONECT ACCESSORIES

NEW

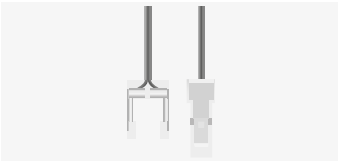

## POWER CONNECTOR

Code	Description
CUL-37801	8mm COB dupont to strip soldering free connector



## STRIP TO STRIP WIRE CONNECTOR

Code	Description
CUL-37802	8mm COB strip to wire to strip soldering free connector



## STRIP TO STRIP CONNECTOR

Code	Description
CUL-37803	8mm COB strip to strip soldering free connector



## UK PLUG TO 'FIGURE-8' (C7) TYPE MAINS LEAD

Code	Input	Cable Length	Colour
CUL-37783	AC200-240V	1000mm	White
CUL-37784	AC200-240V	1500mm	White
CUL-37785	AC200-240V	1800mm	White



## EXTENSION CABLE

Code	Connector	Cable Length	Colour
CUL-37772	Micro 24 male/female connector	1200mm	White
CUL-37773	Micro 24 male/female connector	1800mm	White
CUL-37774	Micro 24 male/female connector	2400mm	White

# KONECT SENSORS

NEW



## IR DOOR SENSOR

The infrared door sensor automatically senses when the cupboard door is opened and switches the light on, and when the cupboard door is shut the lights are instantly switched off, saving energy and money.

Code	Control Mode	Max Load	Cable Length
CUL-37775	Master	–	1500mm
CUL-37776	Channel	60W	2 x 1500mm



## HAND MOTION SENSOR

Simply swipe your hand below the sensor within a 8cm distance enabling you to switch on and off any lighting without touching any buttons.

Code	Control Mode	Max Load	Cable Length
CUL-37781	Master	–	1500mm
CUL-37782	Channel	60W	2 x 1500mm



## PIR SENSOR

Turns on the lighting when movement is detected within a 3m distance. The sensor has a 35 second timing delay so once no further movement is detected the lighting will power off. This can be recessed or mounted flush with the extra bracket provided.



Code	Control Mode	Max Load	Cable Length
CUL-37777	Master	–	1500mm
CUL-37778	Channel	60W	2 x 1500mm



## TOUCH SENSOR

The touch sensor features a blue backlit light has a slimline design and is great for a recessed application. Short touch for on/off function or long press for dimming.



Code	Control Mode	Max Load	Cable Length
CUL-37779	Master	–	1500mm
CUL-37780	Channel	60W	2 x 1500mm



- 2W Bluetooth speaker
- 2 x USB charging ports
- 2 x power outlets
- Qi charger
- IP54 rated
- NOTE: finish is grey not black, images for illustration purposes only

## POP UP

### Socket with Bluetooth Speaker



97mm  
Cut-out



Bluetooth  
Speaker



IP54  
Rated

Code	Finish	Description	USB Ports	Speaker	Dimensions
CUL-37800	Grey	<b>NEW</b> Pop Up Socket with Bluetooth Speaker	2 x 4.5W	1 x 2W	H:260mm (extended) Dia:99.5mm

NEW



- **10W Fast Charge Mode:** Using QC 2.0/3.0 Adapter: Galaxy S20 / S10 / S10+ / S10e / S9+ / S9 / Galaxy Note 10 / Note 9
- **7.5W Fast Charge Mode:** Using QC 2.0/3.0 Adapter: iPhone11 Pro Max / iPhone XR / iPhone 8 SE / iPhone 8 Plus

# WIRELESS

Qi Charger



60mm  
Cut-out

Code	Finish	Description	Output	Dimensions
CUL-37799	Black	<b>NEW</b> Wireless Qi Charger	10W / 7.5W / 5W	Dia:76mm



- 220-240V
- Die-cast Aluminium and ABS construction
- Includes 1 x live end & 1 x dead end

## TOR

### Single Circuit Track



Class 1

Code	Description	Colour	Length	Dimensions
CUL-21637-WHT	Tor Single Circuit Track	White	1000mm	L:1000mm W:37mm Proj:17mm
CUL-21638-WHT	Tor Single Circuit Track	White	1500mm	L:1500mm W:37mm Proj:17mm
CUL-21639-WHT	Tor Single Circuit Track	White	2000mm	L:2000mm W:37mm Proj:17mm
CUL-26333-BLK	Tor Single Circuit Track	Black	1000mm	L:1000mm W:37mm Proj:17mm
CUL-26334-BLK	Tor Single Circuit Track	Black	1500mm	L:1500mm W:37mm Proj:17mm
CUL-26335-BLK	Tor Single Circuit Track	Black	2000mm	L:2000mm W:37mm Proj:17mm





- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

## LUCIDO

### Track Light



Class 2



0.13kg

Code	Description	Colour	Lamp	Dimensions
CUL-21658-WHT	Lucido Track Light	White	1 x 7W max LED GU10	H:135mm Proj:75mm
CUL-26345-BLK	Lucido Track Light	Black	1 x 7W max LED GU10	H:135mm Proj:75mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

## RIBALTA

Track Light


  
 Class 2 | 0.29kg

Code	Description	Colour	Lamp	Dimensions
CUL-21656-WHT	Ribalta Track Light	White	1 x 7W max LED GU10	H:200mm Proj:78mm
CUL-26344-BLK	Ribalta Track Light	Black	1 x 7W max LED GU10	H:200mm Proj:78mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

## LUSTRO

Track Light


 Class 2
 
 0.16kg

Code	Description	Colour	Lamp	Dimensions
CUL-21660-WHT	Lustro Track Light	White	1 x 7W max LED GU10	H:103mm Proj:89mm
CUL-26346-BLK	Lustro Track Light	Black	1 x 7W max LED GU10	H:103mm Proj:89mm

640  
Lumens



- For use with Tor Single Circuit Track
- Compatible with most LED dimmers
- 8W LED module (SMD)
- K: 4000
- Lm: 640
- Lm/W: 80

## LECCO Track Light

Dimmable | 4000K CW | Class 2

Code	Description	Colour	Lamp	Dimensions
CUL-33997-WHT	Lecco LED Track Light	White	8W LED	H:185mm Proj:114mm
CUL-33997-BLK	Lecco LED Track Light	Black	8W LED	H:185mm Proj:114mm

800  
Lumens



- For use with Tor Single Circuit Track
- Compatible with most LED dimmers
- 10W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 80

# LECCO

## Track Light

 Dimmable | 
  4000K CW | 
  Class 2

Code	Description	Colour	Lamp	Dimensions
CUL-33998-WHT	Livorno LED Track Light	White	10W LED	H:142mm Proj:113mm
CUL-33998-BLK	Livorno LED Track Light	Black	10W LED	H:142mm Proj:113mm

# TRACK ACCESSORIES



PENDANT  
ADAPTER  
FITS FLUSH  
IN TRACK

White	Black	Description	Dimensions
CUL-26342	CUL-26341	Flexible Connector	L:296mm W:35mm Proj:17mm
CUL-21645	CUL-26337	Double Live End Connector	L:184mm W:35mm Proj:17mm
CUL-33996	CUL-33996	Track Pendant Adapter	L:81mm W:34mm Proj:46mm
CUL-21651	CUL-26339	T Live End Connector	L:109mm W:183mm Proj:17mm
CUL-21649	CUL-26340	X Live End Connector	L:183mm W:183mm Proj:17mm
CUL-21647	CUL-26338	L Live End Connector	L:109mm W:109mm Proj:17mm
CUL-21643	CUL-26336	Butt Connector	L:79mm W:35mm Proj:17mm

**Upto  
1200  
Lumens**

**NO  
DRIVER  
REQ.**



- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available



• 7mm clip



• 20mm clip

## RENO LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm

**Upto  
6000  
Lumens**

**NO  
DRIVER  
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

## RENO LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	RENO LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm



# RENO

Suspension Kit



Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm

**200**  
Lumens

**IP65**



- Constructed from stainless steel and polycarbonate
- 10 x 0.162W LED module (SMD)
- 1 x 12V IP20 inline transformer with 4m cable
- Easy to install

# OHIO

## 10 Light Plinth Kit

 IP65 Rated |  6000K DW |  Class 3 |  0.5kg

Code	Description	Lamp	Weight	Dimensions
CUL-27858-SST	Ohio Plinth 10 Light Kit	10 x 0.162W Integral LED	0.5kg	Dia:30mm L:4000mm



20  
Lumens

IP65

NO  
DRIVER  
REQ.



- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/4000K
- 1m cable included
- 0.5W LED module (SMD)
- Lm: 20

## OHIO

Circular Plinth Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465-CW	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm



## INDOOR

Indoor lighting including a comprehensive range of decorative cable sets, shades and our new Illuminate task lighting. LED Lamps with attractive design and energy saving performance, INLIGHT LED lamps superbly compliment the Forum Lighting range.

PLASTER LIGHTS	414-429
SPOTLIGHTS	430-439
RECESSED/DOWNLIGHTS	440-445
PICTURE LIGHT	446-447
TASK LIGHTING	448-449
CABLE SETS	450-457
SHADES	458-461
LAMP HOLDERS	462-463
LED LAMPS	464-473

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## UBEDA Downlight



Class 2



0.4kg

Code	Description	Finish	Lamp	Dimensions
INL-37213-WHT	Ubeda Downlight	White	<b>NEW</b> 1 x 7W max LED GU10	Dia:70mm H:110mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

# CADIZ

Tiltable Downlight

 Class 2 |  1.75kg

Code	Description	Finish	Lamp	Dimensions
INL-37214-WHT	Cadiz Tiltable Downlight	White	<b>NEW</b> 1 x 7W max LED GU10	Dia:135mm H:160mm



NEW

PAINT  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## MONTILLA

Up/Down Light



Class 1



0.8kg

Code	Description	Finish	Lamp	Dimensions
INL-37219-WHT	Montilla Up/Down Light	White	<b>NEW</b> 1 x 3W max LED G9	H:115mm W:115mm Proj:115mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## OSUNA Up/Down Light



Class 1



0.8kg

Code	Description	Finish	Lamp	Dimensions
INL-37224-WHT	Osuna Up/Down Light	White	<b>NEW</b> 1 x 3W max LED G9	H:120mm W:110mm Proj:105mm



**NEW**

**PAINT  
TO MATCH  
DECOR**

- White plaster finish
- Can be painted to match decor

## MARTOS

Up/Down Light



Class 1



0.5kg

Code	Description	Finish	Lamp	Dimensions
INL-37221-WHT	Martos Up/Down Light	White	<b>NEW</b> 1 x 3W max LED G9	H:160mm W:100mm Proj:60mm

NEW

PAINT  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## MARTOS

Round Up/Down Light



Class 1



0.95kg

Code	Description	Finish	Lamp	Dimensions
INL-37222-WHT	Martos Round Up/Down Light	White	<b>NEW</b> 1 x 3W max LED G9	H:120mm W:150mm Proj:130mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## **BAZA** Up/Down Light



Class 1



1.2kg

Code	Description	Finish	Lamp	Dimensions
INL-37220-WHT	Baza Up/Down Light	White	<b>NEW</b> 1 x 6W max LED E14 Candle	H:77mm W:300mm Proj:100mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

# RHONDA

Up/Down Light



Class 1



1.05kg

Code	Description	Finish	Lamp	Dimensions
INL-37223-WHT	Rhonda Up/Down Light	White	<b>NEW</b> 1 x 6W max LED E14 Candle	H:95mm W:245mm Proj:125mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## CARMONA

Up/Down Wall Light



Class 1



0.95kg

Code	Description	Finish	Lamp	Dimensions
INL-37225-WHT	Carmona Up/Down Wall Light	White	<b>NEW</b> 2 x 7W max LED GU10	H:250mm W:70mm Proj:95mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## GETXO Up/Down Wall Light



Class 1



1.70kg

Code	Description	Finish	Lamp	Dimensions
INL-37226-WHT	Getxo Up/Down Wall Light	White	<b>NEW</b> 2 x 6W max LED E14 Candle	H:70mm W:350mm Proj:105mm



NEW

PAINT  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## TEIDE

Wall Uplighter



Class 1



1.85kg

Code	Description	Finish	Lamp	Dimensions
INL-38609-WHT	Teide Wall Uplighter	White	<b>NEW</b> 1 x 10W max LED E27 GLS	H:105mm W:425mm Proj:212mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## MAO Wall Uplighter



Class 1



1.2kg

Code	Description	Finish	Lamp	Dimensions
INL-38610-WHT	Mao Wall Uplighter	White	<b>NEW</b> 1 x 10W max LED E27 GLS	H:123mm W:250mm Proj:125mm

**NEW**

**PAINT  
TO MATCH  
DECOR**



- White plaster finish
- Can be painted to match decor

## ARUCAS

Wall Uplighter



Class 1



2.1kg

Code	Description	Finish	Lamp	Dimensions
INL-38611-WHT	Arucas Wall Uplighter	White	<b>NEW</b> 1 x 6W max LED E14 Candle	H:170mm W:355mm Proj:150mm



**NEW**

**PAINT  
TO MATCH  
DECOR**

- White plaster finish
- Can be painted to match decor

## TOLEDO

Wall Uplighter

  
Class 1

  
1.2kg

Code	Description	Finish	Lamp	Dimensions
INL-38612-WHT	Toledo Wall Uplighter	White	<b>NEW</b> 2 x 7W max LED GU10	H:245mm W:136mm Proj:80mm

**NEW**

**2**  
SIZES  
AVAILABLE

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## MOTRIL

Plaster Ceiling Mount



Class 1

Code	Description	Finish	Lamp	Dimensions
INL-37215-WHT	Motril Plaster Ceiling Mount - MED	White <b>NEW</b>	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37216-WHT	Motril Plaster Ceiling Mount - LRG	White <b>NEW</b>		H:85mm Dia:500mm



**NEW**

**2**  
SIZES  
AVAILABLE

**PAINT**  
TO MATCH  
DECOR

- White plaster finish
- Can be painted to match decor

## LUCENA

Plaster Ceiling Mount



Class 1

Code	Description	Finish	Lamp	Dimensions
INL-37217-WHT	Lucena Plaster Ceiling Mount - MED	White <b>NEW</b>	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37218-WHT	Lucena Plaster Ceiling Mount - LRG	White <b>NEW</b>		H:80mm Dia:550mm



- Satin nickel and chrome finish
- Contemporary styling
- ON/OFF toggle switch

## ELARA

Wall Spotlight



Class 1



0.4kg

Code	Description	Lamp	Dimensions
INL-740000-SNIC	Elara Wall Spotlight	1 x 7W max LED GU10	L:110mm W:100mm H:115mm



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

## ELARA

### 4 Light Bar Spotlight



Class 1



1.33kg

Code	Description	Lamp	Dimensions
INL-598410-SNIC	Elara 4 Light Bar Spotlight	4 x 7W max LED GU10	L:800mm W:165mm H:145mm





- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

## ELARA

### 3 Light Plate Spotlight



Class 1



1.33kg

Code	Description	Lamp	Dimensions
INL-598310-SNIC	Elara 3 Light Plate Spotlight	3 x 7W max LED GU10	H:115mm Dia:290mm

**3**  
SIZES  
AVAILABLE



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

# PEDRO

## Spotlight



Class 1

Code	Description	Lamp	Weight	Dimensions
INL-28201-BCHR	Pedro Wall/Ceiling Spotlight	1 x 7W max LED GU10	0.5kg	H:120mm Dia:100mm
INL-28202-BCHR	Pedro 2 Light Plate Spotlight	2 x 7W max LED GU10	1.1kg	H:120mm Dia:190mm
INL-28203-BCHR	Pedro 3 Light Plate Spotlight	3 x 7W max LED GU10	1.2kg	H:120mm Dia:260mm



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

## PEDRO

### 4 Light Plate Spotlight



Class 1



1.65kg

Code

Description

Lamp

Dimensions

INL-28205-BCHR

Pedro 4 Light Plate Spotlight

4 x 7W max LED GU10

W:220mm L:220mm H:120mm

2  
SIZES  
AVAILABLE



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

## PEDRO

Bar Spotlight



Class 1

Code	Description	Lamp	Weight	Dimensions
INL-28204-BCHR	Pedro 4 Light Bar Spotlight	4 x 7W max LED GU10	1.9kg	L:100mm W:640mm H:120mm
INL-31790-BCHR	Pedro 6 Light Bar Spotlight	6 x 7W max LED GU10	2.92kg	L:100mm W:900mm H:120mm





- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

## HARVEY Spotlight



Class 1



0.19kg



Available in  
4 colour options


Code	Finish	Description	Lamp	Dimensions
INL-31775-SNIC	Satin Nickel	Harvey Spotlight	1 x 7W max LED GU10	L:100mm W:85mm H:120mm
INL-31775-BLK	Black			
INL-31775-WHT	White			
INL-31775-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

## HARVEY

### 3 Light Plate Spotlight



Code	Finish	Description	Lamp	Dimensions
INL-31776-SNIC	Satin Nickel	Harvey 3 Light Spotlight	3 x 7W max LED GU10	Dia:215mm H:120mm
INL-31776-BLK	Black			
INL-31776-WHT	White			
INL-31776-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

## HARVEY

### 4 Light Bar Spotlight



Class 1



0.75kg



Available in  
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31723-SNIC	Satin Nickel	Harvey 4 Light Bar Spotlight	4 x 7W max LED GU10	L:774mm W:85mm H:120mm
INL-31723-BLK	Black			
INL-31723-WHT	White			
INL-31723-SATBRS	Satin Brass			



**NEW**

**500 Lumens**

**IP65**

**FAST FIT**










- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



# COMO

## IP65 Tiltable Fire-rated Downlight

 Fire-rated | 
  IP65 Rated | 
  60° Beam | 
  70mm Cut-out | 
  4000K CW | 
  Class 2 | 
  0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
38570/38571-ACOP	Single / 3 Pack	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
38570/38571-BCHR		Black Chrome					
38570/38571-CHR		Chrome					
38570/38571-MWHT		Matt White					
38570/38571-SBLK		Satin Black					
38570/38571-SBRS		Satin Brass					
38570/38571-SNIC		Satin nickel					



**NEW**

**900 Lumens**










**FAST FIT**

- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000



# RHOM

## IP65 Fixed Fire-rated Downlight

-  Fire-rated
-  IP65 Rated
-  60° Beam
-  70mm Cut-out
-  CCT
-  Class 2
-  0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					

**NEW**  
COLOUR  
OPTION

**IP65**



Tilted




Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

## CALI

### Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	Dia:92mm H:115mm  Cutout:78mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

NEW

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes




## CALI

Square Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP	Cali Square Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	L:82mm W:82mm H:115mm  Cutout:78mm
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK		Matt Black		
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

**NEW**

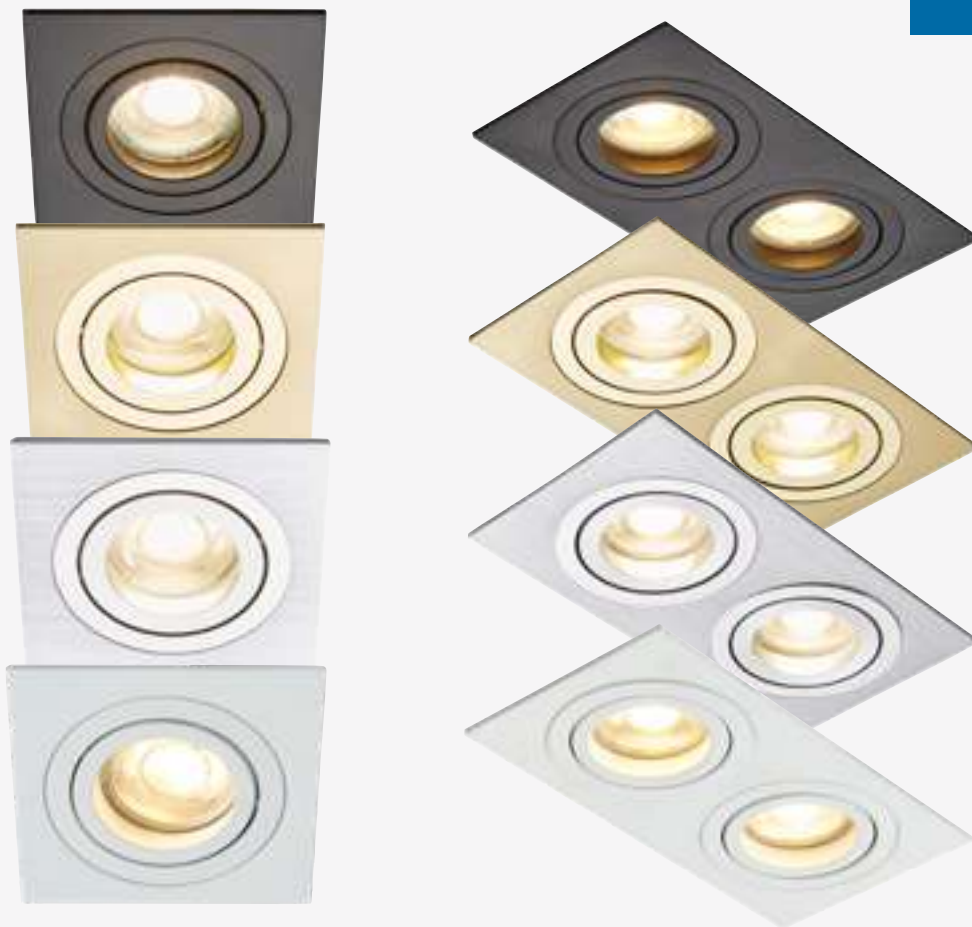

## PASTO

Adjustable Downlight

  
Class 2

Code	Description	Finish	Lamp	Dimensions
INL-38617-BLK	Pasto Single Adjustable Downlight	Black	1 x 7W max LED GU10	L:92mm W:92mm H:3mm Cutout:80mm
INL-38617-POLBRS		Polished Brass		
INL-38617-POLSIL		Polished Silver		
INL-38617-WHT		White		
INL-38618-BLK	Pasto Double Adjustable Downlight	Black	2 x 7W max LED GU10	L:174mm W:92mm H:3mm Cutout:160 x 80mm
INL-38618-POLBRS		Polished Brass		
INL-38618-POLSIL		Polished Silver		
INL-38618-WHT		White		

**NEW**



# PASTO

Triple Adjustable Downlight



Code	Description	Finish	Lamp	Dimensions
INL-38619-BLK		Black		
INL-38619-POLBRS	Pasto Triple Adjustable Downlight	Polished Brass	3 x 7W max LED GU10	L:257mm W:92mm H:3mm Cutout:245 x 80mm
INL-38619-POLSIL		Polished Silver		
INL-38619-WHT		White		





**395**  
Lumens

**IP44**



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70



# CHAI

Picture/Mirror Light

IP44 Rated | 3000K WW | Class 1 | 0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:410mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						



610  
Lumens

3x



- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- Pull switch
- 8W LED module (SMD)
- K: 6000
- Lm: 610
- Lm/W: 76



• Task lamp simply slots into stand

## BUDA

LED Task Lamp



Code	Description	Lamp	Finish	Dimensions
INL-34557-WHT	Buda LED Task Lamp	8W LED	Matt White	L:400mm W:210mm H:1000mm

1100  
Lumens

3x

- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- Pull switch
- 22W T4 Fluorescent lamp - included
- Lm: 1100

## BUDA

Task Lamp



1.5M  
Cable



Class 2




2.46kg

Code	Description	Lamp	Finish	Dimensions
INL-34556-WHT	Buda Task Lamp	22W T4 Fluorescent	Matt White	L:415mm W:200mm H:1000mm

# RIMINI

E27/ES CABLE SET

**NEW**

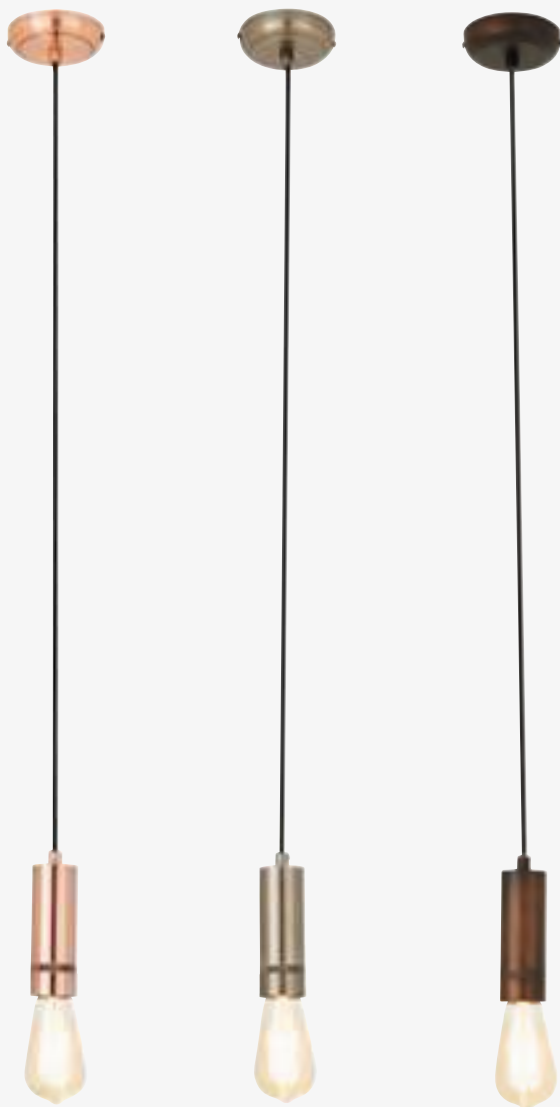

- Fits E27 lamps
- Adjustable height
- Available in 3 finishes

Code	Finish		Description	Lamp	Dimensions
INL-37894-BRZ	Bronze	<b>NEW</b>	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-37894-PEW	Pewter	<b>NEW</b>			
INL-37894-SNIC	Satin Nickel	<b>NEW</b>			

# DALE

## E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 4 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Finish	Lamp	Dimensions
INL-23519-BLK	Cable Set	Black Nickel with Black Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-GRY	Cable Set	Black Nickel with Grey Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-RED	Cable Set	Polished Nickel with Red Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-HERR	Cable Set	Polished Nickel with Herringbone cable	1 x 42W Max E27	Dia:118mm H:1100mm



# DALE

## E27/ES CABLE SET



- Fits E27 lamps
- Can be fitted to almost any easyfit shade
- Adjustable height
- Available in 5 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Lamp	Dimensions
INL-27988-ABRS	Antique Brass Cable Set with Champagne Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-ACOP	Antique Copper Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-PEW	Pewter Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-BRZ	Bronze Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-SNIC	Satin Nickel Cable Set with Grey Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm

**NEW**



- Height adjustable

## NAPOLI

Rope Cable Set



Class 1



0.4kg

Code	Finish		Description	Lamp	Dimensions
INL-37839	Pewter/Natural	<b>NEW</b>	Napoli Rope Cable Set	1 x 10W max LED E27 GLS	H:1050mm Dia:100mm

**NEW**



- Supplied with hook and loop fixing kit to create your own style
- Height adjustable

## NAPOLI

Rope 6 Light Ceiling Light

  
Class 1

  
2.4kg

Code	Finish	Description	Lamp	Dimensions
INL-37829	Pewter/Natural <b>NEW</b>	Napoli Rope 6 Light Ceiling Light	6 x 10W max LED E27 GLS	H:1420mm Dia:2550mm (extd.)





**NEW**  
VERSIONS

**SHADE**  
**RING**



- Supplied with hook and loop fixing kit to create your own style
- Can be fitted with most easyfit shades
- Height adjustable

## PADUA

Ceiling Light



Class 1

Code	Finish		Description	Lamp	Dimensions	Weight
INL-37877-ACOP	Copper/Black	<b>NEW</b>	Padua 3 Light Ceiling Light	3 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	0.8kg
INL-37878-ACOP	Copper/Black	<b>NEW</b>	Padua 5 Light Ceiling Light	5 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	1.3kg
INL-31789-ACOP	Copper/Black		Padua 7 Light Ceiling Light	7 x 10W max LED E27 GLS	Min H:110mm Max H:2000mm	1.81kg



# RIGEL

## DINER SHADES

INL-33818-ACOP



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

INL-33819-ABRS



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Description	Colour	Small	Dimensions	Large	Dimensions
Rigel Diner Shade	Antique Brass	INL-33818-ABRS	H:67mm Dia:236mm	INL-33819-ABRS	H:67mm Dia:360mm
Rigel Diner Shade	Matt Black	INL-33818-MBLK	H:67mm Dia:236mm	INL-33819-MBLK	H:67mm Dia:360mm
Rigel Diner Shade	Polished Nickel	INL-33818-PNIC	H:67mm Dia:236mm	INL-33819-PNIC	H:67mm Dia:360mm
Rigel Diner Shade	Antique Copper	INL-33818-ACOP	H:67mm Dia:236mm	INL-33819-ACOP	H:67mm Dia:360mm
Rigel Diner Shade	Matt Grey	INL-33818-MGRY	H:67mm Dia:236mm	INL-33819-MGRY	H:67mm Dia:360mm



# DECORATIVE SHADES



## Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Code	Description	Colour	Dimensions
INL-33136-SMK	Algol Coolie Glass Easyfit Shade	Smoke	Dia:250mm H:125mm
INL-33137-CHAMP	Algol Sphere Glass Easyfit Shade	Champagne	Dia:243mm H:225mm
INL-33139-MBLK	Castor Onion Wire Easyfit Shade	Matt Black	Dia:240mm H:230mm
INL-33140-ACOP	Castor Diamond Wire Easyfit Shade	Antique Copper	Dia:263mm H:210mm



# CEILING ROSE

E27/ES



- Fits E27 lamps
- Perfect replacement for standard ceiling rose pendants

Code	Finish	Description	Lamp	Dimensions
INL-34942-SNIC	Satin Nickel			
INL-34942-ABRS	Antique Brass	Ceiling Rose	1 x max 10W LED E27 GLS	Dia:180mm H:120mm
INL-34942-ACOP	Antique Copper			

# PADUA LAMPHOLDER

E27/ES

NEW

SHADE  
RING



- Fits E27 lamps
- Can be fitted with most easyfit shades
- Space between ceiling and shade ring

Code	Finish		Description	Lamp	Dimensions
INL-38239-BRZ	Bronze	NEW	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-38239-PEW	Pewter	NEW			
INL-38239-SNIC	Satin Nickel	NEW			





- 360° Beam angle
- Dimmable
- Available in amber or smoke




# LARGE VINTAGE LAMPS


E27/ES




INL-34028-SMK




INL-34029-SMK




INL-34030-SMK




INL-34031-SMK




INL-34028-AMB




INL-34029-AMB



INL-34030-AMB



INL-34031-AMB




Code	Description	Kelvin	Lumen	Dimensions
INL-34028-AMB/SMK	G180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:230mm
INL-34029-AMB/SMK	A165 6W LED E27 Filament Lamp	2000/4000	450	Dia:165mm H:300mm
INL-34030-AMB/SMK	BT180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:360mm
INL-34031-AMB/SMK	T80 6W LED E27 Filament Lamp	2000/4000	450	Dia:80mm H:330mm

# VINTAGE LAMPS


E27/ES




**580**  
LUMEN
**DIMMABLE**


WARM WHITE




**650**  
LUMEN
**DIMMABLE**


WARM WHITE




**450**  
LUMEN
**DIMMABLE**

WARM WHITE




**400**  
LUMEN
**DIMMABLE**


WARM WHITE

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-ST64-LED-ES-TNT	ST64 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-BC-TNT	ST64 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-ES-CLR	ST64 6W E27 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-ST64-LED-BC-CLR	ST64 6W B22 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-G80-LED-ES-TNT	G80 4W E27 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-BC-TNT	G80 4W B22 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-ES-CLR	G80 4W E27 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm
INL-G80-LED-BC-CLR	G80 4W B22 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm


# VINTAGE LAMPS

E27/ES





**580**  
 LUMEN
 **DIMMABLE**




**650**  
 LUMEN
 **DIMMABLE**




**165**  
 LUMEN
 **DIMMABLE**




**180**  
 LUMEN
 **DIMMABLE**

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-G95-LED-ES-TNT	G95 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-BC-TNT	G95 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-ES-CLR	G95 6W E27 LED Filament Lamp	Clear	2000	650	Dia:95mm H:140mm
INL-G95-LED-BC-CLR	G95 6W B22 LED Filament Lamp	Clear	2000	650	Dia:95mm H:140mm
INL-C35L-LED-SES-TNT	C35L 2W E14 LED Filament Lamp	Tinted	2000	165	Dia:35mm H:120mm
INL-C35L-LED-SES-CLR	C35L 2W E14 LED Filament Lamp	Clear	2000	180	Dia:35mm H:120mm

# G9

## COB LED LAMPS

**NEW**



▼  
WARM WHITE  
200 LUMEN

▼  
WARM WHITE  
200 LUMEN  
3 PACK

▼  
WARM WHITE  
200 LUMEN  
6 PACK



▼  
COOL WHITE  
200 LUMEN

▼  
COOL WHITE  
200 LUMEN  
3 PACK

▼  
COOL WHITE  
200 LUMEN  
6 PACK

Code	Description	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-38119	<b>NEW</b>	G9	2W	3000k	200	100lm/W	360°	H:50mm Dia:14mm
INL-38120	<b>NEW</b>			Warm White				
INL-38122	<b>NEW</b>			4000k				
INL-38123	<b>NEW</b>			Cool White				
INL-38124	<b>NEW</b>							
INL-38125	<b>NEW</b>							


# FILAMENT

## LED LAMPS




**600**  
 LUMEN

DIMMABLE



**600**  
 LUMEN

DIMMABLE




**400**  
 LUMEN

DIMMABLE


**400**  
 LUMEN

DIMMABLE

Code	Bulb Shape	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-36014	GLS (Classic)	B22	6W	3000k	600	100lm/W	360°	Dia:60mm H:108mm
INL-36013	GLS (Classic)	E27	6W	Warm White	600			Dia:60mm H:108mm
INL-36012	Candle	E14	4W	Warm White	400			Dia:35mm H:100mm
INL-36017	GLS (Classic)	B22	6W	4000k	600			Dia:60mm H:108mm
INL-36016	GLS (Classic)	E27	6W	Cool White	600			Dia:60mm H:108mm
INL-36015	Candle	E14	4W	Cool White	400			Dia:35mm H:100mm

# G9

## LED LAMPS





**180**  
 LUMEN




**180**  
 LUMEN


**3**  
PACK




**180**  
 LUMEN

**6**  
PACK




**180**  
 LUMEN




**180**  
 LUMEN

**3**  
PACK




**180**  
 LUMEN

**6**  
PACK

Code	Description	Pack Size	Kelvin	Lumen	Dimensions
INL-28573	2.5W G9 LED Lamp	Single	3000	180	W:16mm H:48mm
INL-28575	2.5W G9 LED Lamp	3 Pack	3000	180	W:16mm H:48mm
INL-28577	2.5W G9 LED Lamp	6 Pack	3000	180	W:16mm H:48mm
INL-28574	2.5W G9 LED Lamp	Single	4000	180	W:16mm H:48mm
INL-28576	2.5W G9 LED Lamp	3 Pack	4000	180	W:16mm H:48mm
INL-28578	2.5W G9 LED Lamp	6 Pack	4000	180	W:16mm H:48mm

# GU10

## LED LAMPS



**400**  
LUMEN

**320°**  
BEAM  
ANGLE



**400**  
LUMEN

**320°**  
BEAM  
ANGLE

Code	Description	Hours	Kelvin	Lumen	Dimmable	Dimensions
INL-34150-3K	5W LED GU10 LED Lamp	30000	3000	400	-	Dia:50mm H:53mm
INL-34151-3K	5W LED GU10 LED Lamp	30000	3000	400	Yes	Dia:50mm H:53mm
INL-34150-4K	5W LED GU10 LED Lamp	30000	4000	400	-	Dia:50mm H:53mm
INL-34151-4K	5W LED GU10 LED Lamp	30000	4000	400	Yes	Dia:50mm H:53mm



# DUSK TILL DAWN

## LED LAMPS



DUSK  
TILL  
DAWN

**800**  
LUMEN



DUSK  
TILL  
DAWN

**800**  
LUMEN

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-29464-WW	9W LED E27 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29464-CW	9W LED E27 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm
INL-29465-WW	9W LED B22 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29465-CW	9W LED B22 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm

# CCT

## LED LAMPS




	<b>1050</b> LUMEN	<b>200°</b> BEAM ANGLE
---	----------------------	------------------------------



	<b>1050</b> LUMEN	<b>200°</b> BEAM ANGLE
---	----------------------	------------------------------



	<b>500</b> LUMEN	<b>120°</b> BEAM ANGLE
---	---------------------	------------------------------

- 3 colour choices
- Not dimmable
- Switch between 3000K warm white, 4000K cool white and 6000K daylight white

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-34400-CCT	6W LED GU10 LED Lamp	25000	CCT	500	Dia:50mm H:53mm
INL-34401-CCT	12W LED E27 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm
INL-35728-CCT	12W LED B22 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm



**STANLEY**

# WORKSITE

A professional range of robust, high output and long lasting LED site lighting.


PORTABLE

472-503

FESTOON

504-507



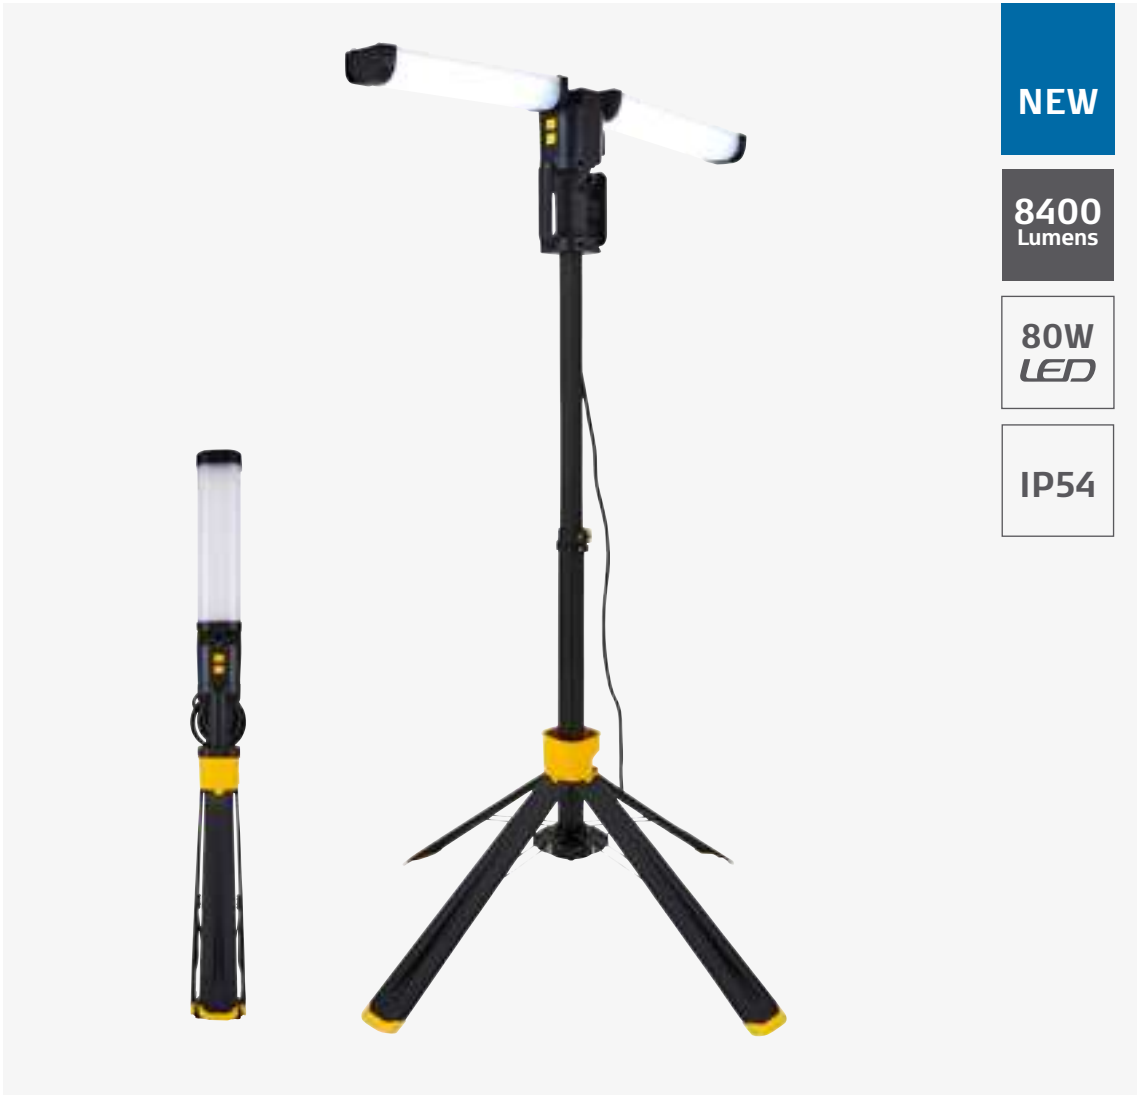

**NEW**

**8400 Lumens**

**80W LED**

**IP54**

- 180° and 360° directional light heads helps prevent light wastage or pollution
- Telescopic pole with manual quick release handles for speedy height adjustment
- Adjustable height from 1.5 to 2m
- Integrated carry handle
- Each head can be switched ON/OFF independently
- 3m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet



# 360° AREA

## Tower Light

 3M Cable	 IP54 Rated	 6500K DW	 Class 1	 5.6kg
---	---	---	--	--

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS35525E	<b>NEW</b> 360° Area Tower Light	80W	6500	8600	H:1500-2000mm Dia:920mm





**NEW**

**4800  
Lumens**

**60W  
LED**

**IP65**



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated

## TWIN

2 x 30W Worklight



2M  
Cable



IP65  
Rated



4000K  
CW



Class 1



1.7kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37952E	<b>NEW</b> Twin 2 x 30W Worklight	60W	4000	4800	L:175mm W:485mm H:315mm





NEW

2800  
Lumens

40W  
LED

IP65



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated

## TWIN

2 x 20W Worklight



2M  
Cable



IP65  
Rated



4000K  
CW



Class 1



KG  
2kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37951E	<b>NEW</b> Twin 2 x 20W Worklight	40W	4000	2800	L:175mm W:485mm H:315mm

**NEW****Upto  
4000  
Lumens****IP44****3  
SIZES  
AVAILABLE**

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 1.5m H05RN-F 3G 1.0mm cable

## PORTABLE

### Work Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS35583E	<b>NEW</b>	20W	4000	1400	1kg	L:115mm x W:190mm x H:290mm
SXLS35584E	<b>NEW</b> Folding Work Light	30W	4000	2400	1.25	L:145mm W:220mm H:320mm
SXLS35585E	<b>NEW</b>	50W	4000	4000	1.45	L:185mm W:250mm H:330mm

**NEW**

**Upto  
3500  
Lumens**


**IP65**

**3  
SIZES  
AVAILABLE**



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm cable

## FOLDING Work Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS35525E	<b>NEW</b>	20W	4000	1400	0.93	L:165mm x W:225mm x H:275mm
SXLS35526E	<b>NEW</b>	30W	4000	2100	1.28	L:185mm W:250mm H:335mm
SXLS35527E	<b>NEW</b>	50W	4000	3500	1.7	L:185mm W:280mm H:375mm







**NEW**

**7500  
Lumens**

**50W  
LED**

**IP65**



- Durable steel frame and die-cast aluminium body
- Battery: 6 x 3.7V 2600mAh
- 20% / 60% / 100% / OFF brightness modes
- Run time
  - 100% - 4 hours
  - 60% 9 hours
  - 20% 12 hours
- 5-6 hours charge time
- 25,000 hours LED lifetime

## RECHARGEABLE

### Folding Worklight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37179E	<b>NEW</b> Rechargeable Worklight	50W	4000	7500	L:220mm W:300mm H:385mm





**8400**  
Lumens

**120W**  
*LED*

**IP65**

**IK10**

- Tripod mountable
- Durable polycarbonate body
- Heavy duty shockproof base
- 360° beam angle for shadow free illumination
- 5m H05RN-F 3G 1.5mm cable
- IK10 vandal resistant
- 120W LED module (SMD)
- K: 6000
- Lm: 8400
- Lm/W: 70

## AREA

Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31324ES	Area Work Light	110V	120W LED	8400	L:349mm W:347mm H:436mm







**2100**  
Lumens

**35W**  
*LED*

**IP44**

- Durable ABS / PC body
- Heavy duty rubber surround
- Folding carry handle acts as a stand and wall mountable fixture
- 5m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 35W LED module (SMD)
- K: 6000
- Lm: 2100
- Lm/W: 70

## PORTABLE Work Light

 5M Cable	 IP44 Rated	 6000K DW	 Class 2	 2.24kg
--	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31326E	Portable Work Light	220-240V	35W LED	2100	L:120mm W:270mm H:275mm





**3200**  
Lumens

**40W**  
*LED*


**IP44**

- Durable ABS / PC body with steel legs
- Foldable stand and carry strap
- 5m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 40W LED module (SMD)
- K: 6000
- Lm: 3200
- Lm/W: 70



# PLASTERERS

Work Light

 5M Cable | 
  IP44 Rated | 
  6000K DW | 
  Class 1 | 
  3.24kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31322ES	Plasterers Work Light	110V	40W LED	3200	L:870mm W:1000mm H:1645mm



**4000**  
Lumens

**50W**  
*LED*

**IP44**

**IK10**

- Durable ABS / PC body
- Heavy duty shockproof base with moulded carry handle
- IK10 impact resistant for tough working environments
- 2 x external socket outlets
- 5m H05RN-F 3G 1.5mm cable
- 50W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80

## PANEL

Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31325ES	Panel Work Light	110V	50W LED	4000	L:150mm W:300mm H:465mm

4000  
Lumens

33W  
LED

IP65



- Durable die-cast aluminium body
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 35W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80
- Hrs: 20,000

• Fits tripod SXLS31333E

## WORK LIGHT



2M  
Cable



IP65  
Rated



6000K  
DW



Class 2



1.9kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31331E	Work Light	220-240V	33W LED	4000	L:183mm W:215mm H:330mm





8000  
Lumens

66W  
LED

IP65



- Durable die-cast aluminium body
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 2 x 33W LED module (SMD)
- K: 6000
- Lm: 8000
- Lm/W: 80
- Hrs: 20,000

• Fits tripod SXLS31333E

## WORK LIGHT



2M  
Cable



IP65  
Rated



6000K  
DW



Class 2



4.45kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31332E	Twin Work Light	220-240V	2 x 33W LED	8000	L:183mm W:540mm H:370mm



# HEAVY DUTY TRIPOD



- Tough powder coated finish to prevent rust and corrosion
- Bar clamp for fast and secure fitting
- Locking mechanism securely locks legs into position
- Collapsible for easy transportation
- Height adjustable up to 1.4m
- Die-cast aluminium
- Built-in cord wrap function for easy storage

Code	Description	Colour	Weight	Dimensions
SXLS31333E	Heavy duty tripod	Black	2.24kg	Dia:780mm H:1400mm

Upto  
**1500**  
Lumens

**IP54**



- Durable ABS with heavy duty rubber surround
- 25% / 50% / 100% / OFF brightness modes
- 1m H05RN-F 3G 1.0mm charging cable with IEC connector
- 2 hours run time at full brightness / 50% 5 hours / 25% 8 hours
- 4-5 hours charge time
- 15,000 hours LED lifetime

## RECHARGEABLE

### Work Light

Rechargeable | IP54 Rated | 6000K DW | Class 2 | 0.76kg

Code	Description	Voltage	Battery	Lamp	Lumen	Dimensions
SXLS31329E	Rechargeable Work Light	220-240V	3.7V 4400mAh	10W LED	800	L:58mm W:158mm H:225mm
SXLS31330E	Rechargeable Work Light	220-240V	3.7V 8800mAh	20W LED	1500	L:58mm W:158mm H:225mm



Upto  
**3900**  
Lumens

**IP65**



- Durable die-cast body with plastic protective bumpers
- Foldable stand for easy storage and transportation
- 1.8m H05RN-F 3G 1.0mm cable

## FOLDING Work Light



1.8M  
Cable



IP65  
Rated



6000K  
DW




Class 1

Code	Description	Voltage	Lamp	Lumen	Weight	Dimensions
SXLS31334E	Folding Work Light	220-240V	10W LED	800	1.6kg	L:235mm W:276mm H:283mm
SXLS31335E	Folding Work Light	220-240V	20W LED	1500	1.7kg	L:245mm W:292mm H:295mm
SXLS31336E	Folding Work Light	220-240V	30W LED	2100	1.84kg	L:255mm W:332mm H:295mm
SXLS31337E	Folding Work Light	220-240V	50W LED	3900	1.92kg	L:255mm W:322mm H:295mm





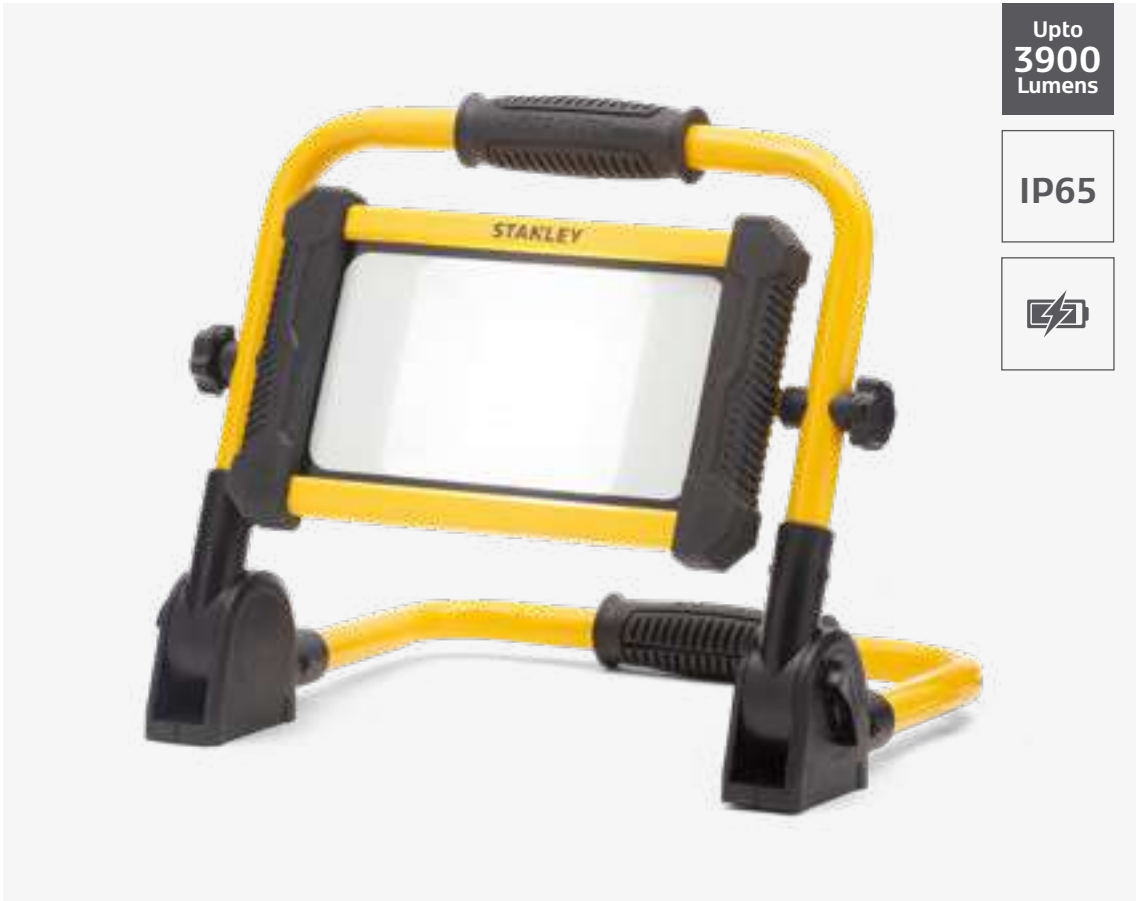

**Upto  
3900  
Lumens**

**IP65**



- Durable die-cast body with plastic protective bumpers
- 30% / 50% / 100% / OFF brightness modes
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm charging cable
- USB charging port with Android & IOS compatibility

# RECHARGEABLE

## Folding Work Light

  
 Rechargeable

  
 IP65 Rated

  
 6000K DW

  
 Class 3

Code	Description	Battery	Charge-Time	Run-Time	Lamp	Lumen	Weight	Dimensions
SXLS31338E	Rechargeable Folding Work Light	2 x 2200mAh	5 Hours	3 Hours	8W LED	600	1.6kg	L:235mm W:276mm H:283mm
SXLS31339E		4 x 2200mAh	5 Hours	4 Hours	18W LED	1350	1.7kg	L:245mm W:292mm H:295mm
SXLS31340E		6 x 2200mAh	5 Hours	4 Hours	24W LED	1800	1.8kg	L:255mm W:332mm H:295mm





**3000**  
Lumens

**40W**  
*LED*

**IP65**

- Durable die-cast body with plastic protective bumpers
- Heavy duty extendable tripod
- 3m H05RN-F 3G 1.0mm cable
- 2 x 20W LED module (SMD)
- K: 6000
- Lm: 3000
- Lm/W: 75

## TWIN LED

Work Light with Tripod



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31540E	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1680mm





**800**  
Lumens

**10W**  
*LED*

**IP44**



- Durable ABS / PC body
- 10 x E27 lampholders with protective guards
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- 10 x 10W LED lamps included



# FESTOON

## 10 Light

 22M Cable	 IP44 Rated	 6500K DW	 Class 1	 7.76kg
---	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31361E	10 Light Festoon	220-240V	10 x 10W Max LED E27 GLS	800	H:182mm Dia:115mm





**6400**  
Lumens

**80W**  
*LED*

**IP44**

- Durable ABS / PC construction
- 10 x 8W LED lamps
- 22m H05RN-F 3G 1.5mm cable
- 10 x 8W LED module (SMD)
- K: 6500
- Lm: 6400
- Lm/W: 80



# LED FESTOON

## 10 Light

 22M Cable	 IP44 Rated	 6500K DW	 Class 1	 7.76kg
---	--	--	--	---

Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31362ES	10 Light LED Festoon	110V	10 x 8W LED	10 x 640	H:67mm Dia:115mm

# MARKETING.

At Forum we offer a variety of Point of Sale and Marketing material, from counter top to wall board and ceiling displays.

Please speak to your internal or local sales person for more details.







NEW



# INFORMATION

## LIGHTING TERMS

---

### Bathroom Zone

Suitability for a product to be installed near or in water.

### CCT

Colour Changing Technology.

### Colour Switchable

Colour temperature can be switched between 3000K to 4000K or 6000K.

### Cool White (CW) 4000K

Light with a CCT kelvin temperature of 4000K.

### Daylight White (DW) 6000K

Light with a CCT kelvin temperature of 6000K.

### Downlight

A luminaire designed to be installed in a ceiling, with the light source pointed vertically downwards.

### Floodlight

A luminaire featuring a wide beam angle, designed to provide illumination over a wide area.

### IK Rating

Indicates the protection against mechanical impact. Rated from IK00 to IK10.

### IP Rating

Ingress Protection Rating.

### Kelvin (K)

Kelvin is the scientific unit for measuring CCT.

### LED (Light Emitting Diode)

Emits light through the conversion of electrical energy.

### Lifetime

The definition of LED luminaire lifetime is the period in hours after which the luminaire no longer delivers the correct amount of light,

either insufficient light is produced or none at all. This may be a combination of many factors not limited to just the LED performance.

### Lumens (lm)

The quantity of light emitted from a light source that is visible. The higher the lumens, the brighter the light.

### LUX

A measure of the intensity of light, defined as 1lm /m<sup>2</sup>.

### Microwave Sensor

An active intrusion sensor that detects the movement of a person or object through a pattern of microwave energy

### Photocell

Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached

### PIR Sensor

Passive Infrared Device, used to activate lighting when a person enters a room or area.

### Power Supply / Driver

Power source for the LED luminaire.

### RGB

Red, Green, Blue. Used to describe colour changing products that can be used to dynamically add colour to any environment.

### RGBW

Stands for Red, Green, Blue, White. Used to describe colour changing products that can be used to dynamically add colour to any environment. Can also be run on white when natural lighting is required.

### Spotlight

A light source featuring a narrow beam angle, designed to allow highlighting or illumination of specific features in an area.

### Task Lighting

Lighting specifically designed to provide functional illumination of an environment.

### Warm White (WW) 3000K

Light with a CCT kelvin temperature of 3000K.

### Watt (W)

The unit of electrical power stating the amount of electricity consumed by the product.

### Work Lighting

Lighting specifically designed to provide functional illumination of a work site environment.

# COLOUR TEMPERATURE

## GUIDE

LEDs make it possible to have a choice of white colours or 'tones'. This allows easy customisation of an area to bring out the best in the materials and design of a room. With standard white LED lighting, these tones range from warm-yellow, to daylight-blue light, with options in between. The graphic below is a reference that starts at a warm yellow colour on the left and fades into a blue colour on the right.

Colour temperature ratings describe the tones of white light available. Colour temperature options range from 2000-3000K for Warm White lighting, 3100-4500 for Cool White lighting and 4600-6500 for Daylight White lighting. It can be a tricky decision to know what is best for your installation, but our skilled technical sales team are on hand to guide you through choosing the perfect white tone for your room.



Colour temperature	2000-3000K	3100-4500K	4600-6500K
Light appearance	Warm White	Cool White	Daylight White
Best for	Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas	Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in contemporary kitchens and bathroom to complement décor	Perfect for industrial, security, garages and task lighting where the most natural lighting is required



# IP RATING

## INGRESS PROTECTION

Ingress protection rating (IP); this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and outdoor environments. Written as IPXX, the first X denotes the level of protection offered from dust; the second X denotes the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

### SOLID OBJECTS

0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter
2	Protection against fingers or other objects not greater than 80mm in length and 12mm in diameter
3	Protection from entry by tools, wires etc, with a diameter of 2.5mm or more
4	Protection against solid bodies larger than 1mm
5	Protection against dust that may harm equipment
6	Totally dust-tight; no ingress of dust

### LIQUIDS

0	No special protection
1	Protected against dripping water; vertically falling drops
2	Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical; limited ingress permitted
3	Protected against sprays of water up to 60 degrees from the vertical; limited ingress permitted
4	Protection from splashing water from any direction
5	Protection against low pressure water jets (all directions)
6	Protection against high pressure water jets and waves
7	Protection against temporary immersion
8	Watertight against the effects of immersion in water under pressure for long periods

Ingress protection ----- **IP65**

# BATHROOM ZONING

## WHAT IS BATHROOM ZONING?


All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone. To illustrate IP zoning regulations, the bathroom area is divided up into areas or 'ZONES'. Light fittings are then assigned an 'IP rating' which indicates how much protection they provide against ingress of water and other particles. Each zone has a minimum IP requirement that must be met if a fitting is to be installed in this area.

### Zone 0 $\geq$ IPX7

Inside bath or shower. Only 12V AC rms or 30V ripple-free DC SELV fittings with a minimum rating of IPX7 (protected against immersion in water). Transformers must be sited outside Zones 0,1,2.

### Zone 1 $\geq$ IPX5

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

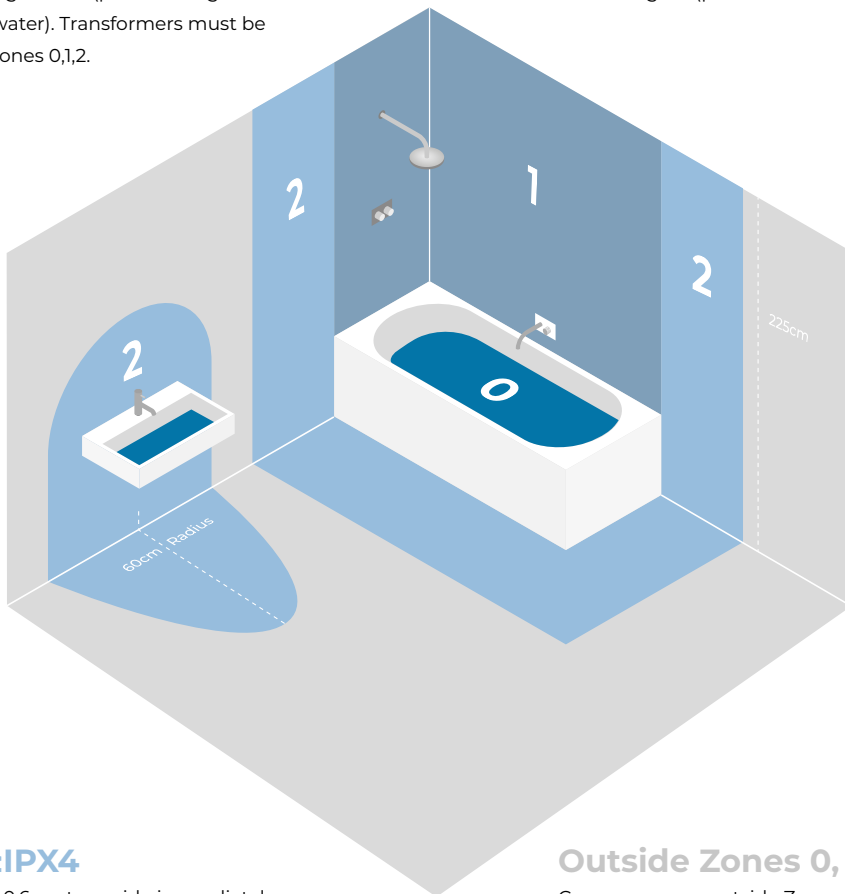

### Zone 2 $\geq$ IPX4

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

### Outside Zones 0, 1 & 2

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

# INDEX.

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

# INDEX (ALPHABETICAL)

CUL-21624	372	CUL-26337	405	CUL-35864	378
CUL-21625	373	CUL-26338	405	CUL-35865	379
CUL-21626	374	CUL-26339	405	CUL-37386	383
CUL-21627	375	CUL-26340	405	CUL-37387	383
CUL-21637	399	CUL-26341	405	CUL-37388	383
CUL-21638	399	CUL-26342	405	CUL-37389	383
CUL-21639	399	CUL-26344	401	CUL-37767	393
CUL-21643	405	CUL-26345	400	CUL-37768	393
CUL-21645	405	CUL-26346	402	CUL-37769	393
CUL-21647	405	CUL-26465	95/411	CUL-37770	394
CUL-21649	405	CUL-26465-WW	95/411	CUL-37771	394
CUL-21651	405	CUL-27858-SST	93/409	CUL-37772	395
CUL-21653	405	CUL-30698	225/406	CUL-37773	395
CUL-21656	401	CUL-30699	225/406	CUL-37774	395
CUL-21658	400	CUL-30700	225/406	CUL-37775	396
CUL-21660	402	CUL-30701	225/406	CUL-37776	396
CUL-21661	381	CUL-30702	225/406	CUL-37777	396
CUL-21662	381	CUL-30703	225/406	CUL-37778	396
CUL-21663	381	CUL-30704	226/407	CUL-37779	396
CUL-21664	381	CUL-30705	226/407	CUL-37780	396
CUL-21665	380	CUL-30706	226/407	CUL-37781	396
CUL-21666	380	CUL-30707	226/407	CUL-37782	396
CUL-25218	373	CUL-30708	226/407	CUL-37783	395
CUL-25219	374	CUL-30709	226/407	CUL-37784	395
CUL-25220	375	CUL-30710	227/408	CUL-37785	395
CUL-25317	372	CUL-30711	227/408	CUL-37786	394
CUL-25318	373	CUL-33996-BLK	405	CUL-37787	389
CUL-25319	374	CUL-33996-WHT	405	CUL-37788	389
CUL-25320	375	CUL-33997-BLK	403	CUL-37789	389
CUL-25321	381	CUL-33997-WHT	403	CUL-37790	389
CUL-25322	381	CUL-33998-BLK	404	CUL-37791	391
CUL-25323	381	CUL-33998-WHT	404	CUL-37792	391
CUL-25324	381	CUL-34223-CCT	382	CUL-37793	392
CUL-26332	405	CUL-34224-CCT	382	CUL-37794	392
CUL-26333	399	CUL-34225-CCT	382	CUL-37795	388
CUL-26334	399	CUL-34226-CCT	382	CUL-37796	388
CUL-26335	399	CUL-35860	376	CUL-37797	387
CUL-26336	405	CUL-35861	377	CUL-37798	387

## INDEX (ALPHABETICAL)

CUL-37799	398	CZ-31752-BLK	200	ELA-27467-MBLK	237/332
CUL-37800	397	CZ-31806-BLK	203	ELA-27467-SATBRS	237/332
CUL-37832	385	CZ-31811-BLK	169	ELA-27467-SCHR	237/332
CUL-37833	385	CZ-31812-BLK	170	ELA-27467-WHT	237/332
CUL-37834	385	CZ-33397-BLK	177	ELA-28093-CHR	234/324
CUL-37835	385	CZ-33461-BLK	171	ELA-28101-OPL	234/324
CUL-37836	385	CZ-34014-BLK	179	ELA-28102-OPL	234/324
CZ-20947-BLK	175	CZ-34015-BLK	179	ELA-28103-OPL	234/324
CZ-25142-BLK	174	CZ-34016-BLK	180	ELA-28104-OPL	234/324
CZ-25143-BLK	190	CZ-34017-BLK	180	ELA-28414-WHT	224
CZ-25144-BLK	189	CZ-34023-BLK	177	ELA-28415-WHT	224
CZ-25145-BLK	164	CZ-34025-BLK	173	ELA-28416-WHT	224
CZ-25148-BLK	161	CZ-34026-BLK	172	ELA-28417-WHT	224
CZ-25149-BLK	162	CZ-34027-BLK	172	ELA-28418-WHT	224
CZ-25150-BLK	163	CZ-34402	204	ELA-28419-WHT	224
CZ-26743-BLK	165	CZ-34403	204	ELA-28420-WHT	224
CZ-29191-ATR	199	CZ-34404	204	ELA-28421-WHT	224
CZ-29192-ATR	197	CZ-34405	205	ELA-34280	209
CZ-29193-ATR	195	CZ-35704-BLK	187	ELA-34281	209
CZ-29319-ANTH	193	CZ-35705-BLK	186	ELA-34282	209
CZ-29319-BLK	193	CZ-35742-BLK	168	ELA-34283	211
CZ-29319-SST	193	CZ-38639-ANTH	167	ELA-34284	211
CZ-29320-ANTH	191	CZ-38639-BLK	167	ELA-34285	211
CZ-29320-BLK	191	CZ-38639-WHT	167	ELA-34286	220
CZ-29320-SST	191	ELA-27465-BCHR	235/330	ELA-34287	220
CZ-29321-ANTH	194	ELA-27465-CHR	235/330	ELA-34288	222
CZ-29321-BLK	194	ELA-27465-MBLK	235/330	ELA-34289	222
CZ-29321-SST	194	ELA-27465-SATBRS	235/330	ELA-34290	212
CZ-31740-BLK	185	ELA-27465-SCHR	235/330	ELA-34291	213
CZ-31743-BLK	183	ELA-27465-WHT	235/330	ELA-34292	220
CZ-31744-BLK	188	ELA-27466-BCHR	236/331	ELA-34293	220
CZ-31745-BLK	183	ELA-27466-CHR	236/331	ELA-34294	222
CZ-31746-BLK	184	ELA-27466-MBLK	236/331	ELA-34295	222
CZ-31747-BLK	200	ELA-27466-SATBRS	236/331	ELA-34296	215
CZ-31748-BLK	165	ELA-27466-SCHR	236/331	ELA-34297	221
CZ-31749-BLK	201	ELA-27466-WHT	236/331	ELA-34298	222
CZ-31750-BLK	181	ELA-27467-BCHR	237/332	ELA-34299	222
CZ-31751-BLK	182	ELA-27467-CHR	237/332	ELA-34300	219

## INDEX (ALPHABETICAL)

ELA-34301	219	ELA-35745	229	INL-28204-BCHR	435
ELA-34302	219	ELA-35746	229	INL-28205-BCHR	434
ELA-34303	219	ELA-35747	223	INL-28573	470
ELA-34304	219	ELA-35748	223	INL-28574	470
ELA-34305	219	ELA-35749	223	INL-28575	470
ELA-34306	218	ELA-35750	217/390	INL-28576	470
ELA-34307	218	ELA-35751	217/390	INL-28577	470
ELA-34308	218	ELA-35752	217	INL-28578	470
ELA-34857	209	ELA-35753	217	INL-29464-CW	472
ELA-34858	209	ELA-37801	395	INL-29464-WW	472
ELA-34859	209	ELA-37802	395	INL-29465-CW	472
ELA-34860	211	ELA-37803	395	INL-29465-WW	472
ELA-34861	211	ELA-38863	136	INL-31723-BLK	439
ELA-34862	211	ELA-38864	136	INL-31723-SATBRS	439
ELA-34866	233/325	ELA-38865	136	INL-31723-SNIC	439
ELA-34867	233/325	ELA-38866	137	INL-31723-WHT	439
ELA-34868	233/325	ELA-38867	137	INL-31775-BLK	437
ELA-34869	233/325	ELA-38868	137	INL-31775-SATBRS	437
ELA-34871	212	ELA-38869	137	INL-31775-SNIC	437
ELA-34872	213	ELA-38870	136	INL-31775-WHT	437
ELA-34873	215	ELA-38871	137	INL-31776-BLK	438
ELA-34874	223	ELA-38872	243	INL-31776-SATBRS	438
ELA-34875	223	ELA-38873	240	INL-31776-SNIC	438
ELA-34876	223	ELA-38874	242	INL-31776-WHT	438
ELA-35692	228	ELA-38875	239	INL-31789-ACOP	457
ELA-35693	228	ELA-38876	241	INL-31790-BCR	435
ELA-35694	228	INL-23519-BLK	451	INL-33136-SMK	461
ELA-35695	228	INL-23519-GRY	451	INL-33137-CHAMP	461
ELA-35696	228	INL-23519-HERR	451	INL-33139-MBLK	461
ELA-35697	228	INL-23519-RED	451	INL-33140-ACOP	461
ELA-35698	228	INL-27988-ABRS	453	INL-33818-ABRS	459
ELA-35699	228	INL-27988-ACOP	453	INL-33818-ACOP	459
ELA-35700	228	INL-27988-BRZ	453	INL-33818-MBLK	459
ELA-35701	228	INL-27988-PEW	453	INL-33818-MGRY	459
ELA-35702	228	INL-27988-SNIC	453	INL-33818-PNIC	459
ELA-35703	228	INL-28201-BCHR	433	INL-33819-ABRS	459
ELA-35743	229	INL-28202-BCHR	433	INL-33819-ACOP	459
ELA-35744	229	INL-28203-BCHR	433	INL-33819-MBLK	459

# INDEX (ALPHABETICAL)

INL-33819-MGRY	459	INL-37221	418	INL-38619-WHT	445
INL-33819-PNIC	459	INL-37222	419	INL-598310-SNIC	432
INL-34028-AMB	465	INL-37223	420	INL-598410-SNIC	431
INL-34028-SMK	465	INL-37224	417	INL-740000-SNIC	430
INL-34029-AMB	465	INL-37225	422	INL-C35L-LED-SES-CLR	467
INL-34029-SMK	465	INL-37226	423	INL-C35L-LED-SES-TNT	467
INL-34030-AMB	465	INL-37829	455	INL-G80-LED-BC-CLR	466
INL-34030-SMK	465	INL-37839	454	INL-G80-LED-BC-TNT	466
INL-34031-AMB	465	INL-37877	457	INL-G80-LED-ES-CLR	466
INL-34031-SMK	465	INL-37878	457	INL-G80-LED-ES-TNT	466
INL-34150-3K	471	INL-37894-BCOP	450	INL-G95-LED-BC-CLR	467
INL-34150-4K	471	INL-37894-BRZ	450	INL-G95-LED-BC-TNT	467
INL-34151-3K	471	INL-37894-PEW	450	INL-G95-LED-ES-CLR	467
INL-34151-4K	471	INL-38119	468	INL-G95-LED-ES-TNT	467
INL-34400	473	INL-38120	468	INL-ST64-LED-BC-CLR	466
INL-34401	473	INL-38122	468	INL-ST64-LED-BC-TNT	466
INL-34556-WHT	449	INL-38123	468	INL-ST64-LED-ES-CLR	466
INL-34557-WHT	448	INL-38124	468	INL-ST64-LED-ES-TNT	466
INL-34558-WHT	448	INL-38125	468	SP-25202-CHR	361
INL-34942-ABRS	462	INL-38239-BRZ	463	SP-25203-CHR	362
INL-34942-ACOP	462	INL-38239-PEW	463	SP-25204-CHR	358
INL-34942-SNIC	462	INL-38239-SNIC	463	SP-25211-CHR	369
INL-35728	473	INL-38609	424	SP-25253-CHR	363
INL-36012	469	INL-38610	425	SP-25254-CHR	366
INL-36013	469	INL-38611	426	SP-25255-CHR	367
INL-36014	469	INL-38612	427	SP-25256-CHR	365
INL-36015	469	INL-38613		SP-31449-CHR	364
INL-36016	469	INL-38617-BLK	444	SP-31450-CHR	359
INL-36017	469	INL-38617-SBRS	444	SPA-19713-BRS	285
INL-37211		INL-38617-SNIC	444	SPA-19713-CHR	285
INL-37213	414	INL-38617-WHT	444	SPA-19714-BRS	283
INL-37214	415	INL-38618-BLK	444	SPA-19714-CHR	283
INL-37215	428	INL-38618-SBRS	444	SPA-20182-BRS	286
INL-37216	428	INL-38618-SNIC	444	SPA-20182-CHR	286
INL-37217	429	INL-38618-WHT	444	SPA-20829-CHR	298
INL-37218	429	INL-38619-BLK	445	SPA-20829-MBLK	298
INL-37219	416	INL-38619-SBRS	445	SPA-20829-SATBRS	298
INL-37220	420	INL-38619-SNIC	445	SPA-20831-BRS	287

# INDEX (ALPHABETICAL)

SPA-20831-CHR	287	SPA-31309-BRS	297	SPA-34047-SNIC	316
SPA-22560	311	SPA-31309-CHR	297	SPA-34049-BRS	317
SPA-22560-BRS	311	SPA-31309-MBLK	297	SPA-34049-CHR	317
SPA-22560-MBLK	311	SPA-31725-CHR	295	SPA-34049-SBLK	317
SPA-24467-CHR	289	SPA-31725-SBRS	295	SPA-34049-SNIC	317
SPA-24467-SATBRS	289	SPA-31726-CHR	293	SPA-34050-BRS	317
SPA-24468-CHR	289	SPA-31726-SBRS	293	SPA-34050-CHR	317
SPA-24468-SATBRS	289	SPA-31730-CHR	303	SPA-34050-SBLK	317
SPA-24677-CHR	275	SPA-31731-CHR	302	SPA-34050-SNIC	317
SPA-24678-CHR	276	SPA-31732-CHR	301	SPA-34864	353
SPA-24869-BRS	288	SPA-31733-CHR	300	SPA-34865	355
SPA-24869-CHR	288	SPA-31735-CHR	305	SPA-35080-CHR	308
SPA-24870-CHR	288	SPA-31736-CHR	307	SPA-35081-CHR	309
SPA-24870-SATBRS	288	SPA-31737-CHR	306	SPA-35706	345
SPA-24871-BRS	288	SPA-31780-CHR	304	SPA-35707	347
SPA-24871-CHR	288	SPA-33929-CHR	277	SPA-35708	349
SPA-27401	314	SPA-33930-CHR	279	SPA-35709	321
SPA-27405-BRS	312	SPA-33931-CHR	281	SPA-35710	323
SPA-27405-CHR	312	SPA-33932-CHR	281	SPA-35711	319
SPA-27405-MBLK	312	SPA-33974-CHR	280	SPA-35712	319
SPA-28326-CHR	291	SPA-34008-WHT	319	SPA-35713	321
SPA-28327-CHR	291	SPA-34009-WHT	322	SPA-35714	321
SPA-29195-CHR	291	SPA-34010-SNIC	319	SPA-35715	321
SPA-30781-CHR	299	SPA-34011-SNIC	322	SPA-35716	321
SPA-30841-BRCOP	328/442	SPA-34012-CHR	319	SPA-35717	322
SPA-30841-MBLK	328/442	SPA-34013-CHR	322	SPA-35718	322
SPA-30841-MWHT	328/442	SPA-34035	339	SPA-35719	323
SPA-30842-CHR	328/442	SPA-34036	340	SPA-35720	323
SPA-30842-SBRS	328/442	SPA-34037	341	SPA-35721	323
SPA-30842-SCHR	328/442	SPA-34038	342	SPA-35722	323
SPA-30993-CHR	336/447	SPA-34039	343	SPA-35723	329/443
SPA-30993-MBLK	336/447	SPA-34046-BRS	316	SPA-35724	329/443
SPA-30993-SBRS	336/447	SPA-34046-CHR	316	SPA-35725	329/443
SPA-30993-SNIC	336/447	SPA-34046-SBLK	316	SPA-35726	329/443
SPA-31292-CHR	313	SPA-34046-SNIC	316	SPA-35727	329/443
SPA-31306-BRS	296	SPA-34047-BRS	316	SPA-35782-CHR	255
SPA-31306-CHR	296	SPA-34047-CHR	316	SPA-35783-CHR	255
SPA-31306-MBLK	296	SPA-34047-SBLK	316	SPA-35808-CHR	254



# INDEX (ALPHABETICAL)

SPA-35809-CHAMP	256	SPA-36311-CHR	253	SPA-PRI3145-SBRS	337
SPA-35809-CHR	256	SPA-36920-CHR	338	SXLS31322ES	491
SPA-35810-CHAMP	257	SPA-38570-ACOP	326/440	SXLS31324ES	487
SPA-35810-CHR	257	SPA-38570-BCHR	326/440	SXLS31325ES	492
SPA-35811-CHAMP	258	SPA-38570-CHR	326/440	SXLS31326E	489
SPA-35811-CHR	258	SPA-38570-MWHT	326/440	SXLS31329E	497
SPA-35828-CHR	260	SPA-38570-SBLK	326/440	SXLS31330E	497
SPA-35828-SBRS	260	SPA-38570-SBRS	326/440	SXLS31331E	493
SPA-35829-CHR	261	SPA-38570-SNIC	326/440	SXLS31332E	495
SPA-35829-SBRS	261	SPA-38571-ACOP	326/440	SXLS31333E	496
SPA-35830-CHR	259	SPA-38571-BCHR	326/440	SXLS31334E	499
SPA-35830-SBRS	259	SPA-38571-CHR	326/440	SXLS31335E	499
SPA-35836-CHR	262	SPA-38571-MWHT	326/440	SXLS31336E	499
SPA-35836-SBRS	262	SPA-38571-SBLK	326/440	SXLS31337E	499
SPA-35837-CHR	263	SPA-38571-SBRS	326/440	SXLS31338E	501
SPA-35837-SBRS	263	SPA-38571-SNIC	326/440	SXLS31339E	501
SPA-35838-CHR	264	SPA-38572-ACOP	327/441	SXLS31340E	501
SPA-35838-SBRS	264	SPA-38572-BCHR	327/441	SXLS31361E	505
SPA-35839-CLR	268	SPA-38572-CHR	327/441	SXLS31362ES	507
SPA-35839-SMK	268	SPA-38572-MWHT	327/441	SXLS31540E	503
SPA-35840-CLR	266	SPA-38572-SBLK	327/441	ZN-20930-BLK	34
SPA-35840-SMK	266	SPA-38572-SBRS	327/441	ZN-20930-SST	34
SPA-35841-CLR	267	SPA-38572-SNIC	327/441	ZN-20941-Anth	9
SPA-35841-SMK	267	SPA-38573-CHR	327/441	ZN-20941-BLK	9
SPA-35842-CLR	265	SPA-38573-SBRS	327/441	ZN-20941-COP	9
SPA-35842-SMK	265	SPA-38573-TBLK	327/441	ZN-20941-POLSSST	9
SPA-35843-CHR	269	SPA-38574-CHR	248	ZN-20941-SST	9
SPA-35843-SBRS	269	SPA-38575-CHR	248	ZN-20941-WHT	9
SPA-36128-SBRS	270	SPA-38576-CHR	247	ZN-20944-ANTH	61
SPA-36129-CHR	271	SPA-38576-SBRS	247	ZN-20944-BLK	61
SPA-36130-MBLK	272	SPA-38576-TBLK	247	ZN-20944-SIL	61
SPA-36140-CHR	273	SPA-38577-BRCOP	329/443	ZN-20945-BLK	60
SPA-36300-CHR	249	SPA-6888.014	335	ZN-20945-SST	60
SPA-36301-CHR	250	SPA-6888.014-SBRS	335	ZN-20955-BLK	73
SPA-36302-CHR	251	SPA-PR-12744	334	ZN-20955-DOVG	73
SPA-36303-CHR	251	SPA-PR-17146	333	ZN-20955-IVO	73
SPA-36309-CHR	252	SPA-PRI3145	337	ZN-20955-MINT	73
SPA-36310-CHR	253	SPA-PRI3145-MBLK	337	ZN-20955-PBLU	73

## INDEX (ALPHABETICAL)

ZN-20957-BLK	71	ZN-29184-BLK	88	ZN-31809-SST	74
ZN-20957-DOVG	71	ZN-29185-WHT	153	ZN-32069-BLK	55
ZN-20957-IVO	71	ZN-29186-WHT	157	ZN-32070-BLK	63
ZN-20957-MINT	71	ZN-29187-WHT	156	ZN-33394-BLK	87
ZN-20957-PBLU	71	ZN-29189-ATR	41	ZN-33394-SST	87
ZN-20965-BLK	89	ZN-29190-ATR	42	ZN-33460-BLK	48
ZN-20965-SST	89	ZN-29347-Anth	51	ZN-33460-SST	48
ZN-23454-BLK	103	ZN-29347-BLK	51	ZN-33579-BLK	141
ZN-23454-WHT	103	ZN-29347-POLALU	51	ZN-33579-DGRY	141
ZN-24507-SST	76	ZN-29992-BLK	38	ZN-33579-WHT	141
ZN-25151-BLK	140	ZN-29993-BLK	28	ZN-33615-BLK	143
ZN-25151-DGRY	140	ZN-29995-BLK	26	ZN-33615-WHT	143
ZN-25151-WHT	140	ZN-29996-BLK	27	ZN-33994-BLK	79
ZN-25152-BLK	145	ZN-29997-BLK	91	ZN-33995-BLK	79
ZN-25152-DGRY	145	ZN-31385	108	ZN-34002-SST	53
ZN-25152-WHT	145	ZN-31386	108	ZN-34003-BLK	53
ZN-25153-WHT	148	ZN-31387	109	ZN-34018-SBLK	20
ZN-25154-WHT	146	ZN-31757-ANTH	69	ZN-34018-SST	20
ZN-25155-WHT	150	ZN-31757-DOVG	69	ZN-34019-ANTH	46
ZN-25156-BLK	152	ZN-31757-IVO	69	ZN-34019-BLK	46
ZN-25340-SST	82	ZN-31757-MINT	69	ZN-34019-WHT	46
ZN-25463-BLK	81	ZN-31757-PBLU	69	ZN-34020-ANTH	47
ZN-25464-BLK	80	ZN-31758-ANTH	37	ZN-34020-BLK	47
ZN-26536-BLK	17	ZN-31758-POLALU	37	ZN-34020-WHT	47
ZN-26536-COP	17	ZN-31759-ANTH	36	ZN-34022-BLK	11
ZN-26536-SST	17	ZN-31759-POLALU	36	ZN-34022-SST	11
ZN-26536-WHT	17	ZN-31765-BLK	50	ZN-34042-ANTH	41
ZN-28708-BLK	82	ZN-31767-BLK	30	ZN-34043-ANTH	42
ZN-28708-SST	82	ZN-31768-BLK	30	ZN-34044-BLK	96
ZN-29177-WHT	147	ZN-31786-WHT	149	ZN-34354-BLK	105
ZN-29179-ANTH	10	ZN-31787-WHT	142	ZN-34355-BLK	105
ZN-29179-BLK	10	ZN-31805-WHT	151	ZN-34356-BLK	105
ZN-29179-COP	10	ZN-31807-TBLK	75	ZN-34357-BLK	105
ZN-29179-SST	10	ZN-31808-POLSST	74	ZN-34358-BLK	105
ZN-29180-BLK	19	ZN-31809-DOVG	74	ZN-34359-BLK	107
ZN-29180-SST	19	ZN-31809-IVO	74	ZN-34360-BLK	107
ZN-29181-BLK	35	ZN-31809-MINT	74	ZN-34361-BLK	107
ZN-29181-SST	35	ZN-31809-PBLU	74	ZN-34362-BLK	107

# INDEX (ALPHABETICAL)

ZN-34555-BLK	49	ZN-38205-SIL	59	ZN-38640-MBLK	56
ZN-34555-SST	49	ZN-38354-BLK	58	ZN-38641-MBLK	57
ZN-34870	111	ZN-38354-SIL	58	ZR-32297-BLK	119
ZN-35593-BLK	43	ZN-38599-BLK	154	ZR-32298-BLK	115
ZN-35594-BLK	45	ZN-38600-WHT	155	ZR-32299-BLK	117
ZN-35685-BLK	45	ZN-38602-BLK	64	ZR-32300-BLK	131
ZN-35686-BLK	43	ZN-38603-BLK	54	ZR-32301-BLK	127
ZN-35687-BLK	98	ZN-38605-BLK	78	ZR-32302-BLK	114
ZN-35687-DGRY	98	ZN-38605-WHT	78	ZR-32328-BLK	128
ZN-35687-WHT	98	ZN-38606-BLK	78	ZR-37441-BLK	130
ZN-35688-BLK	99	ZN-38606-WHT	78	ZR-37442-GMTL	133
ZN-35688-DGRY	99	ZN-38614-BLK	85	ZR-37443-BLK	125
ZN-35688-WHT	99	ZN-38614-SST	85	ZR-37444-BLK	129
ZN-35689-BLK	97	ZN-38615-BLK	83	ZR-37445-BLK	135
ZN-35690-WHT	138	ZN-38615-SST	83	ZR-37448-BLK	134
ZN-35691-BLK	139	ZN-38616-BLK	84	ZR-38155-SIL	113
ZN-35738-BLK	90	ZN-38616-SST	84	ZR-38156-BLK	124
ZN-35739-BLK	24	ZN-38620-BLK	65	ZR-38528-BLK	120
ZN-35740-BLK	21	ZN-38621-ANTH	32	ZR-38529-SIL	121
ZN-35741-BLK	25	ZN-38621-BLK	32	ZR-38532-SIL	122
ZN-37052-BLK	104	ZN-38621-WHT	32	ZR-38831-SIL	122
ZN-37938-ANTH	14	ZN-38622-ANTH	31	ZR-38833-BLK	123
ZN-37938-BLK	14	ZN-38622-BLK	31	ZR-38834-BLK	123
ZN-37938-COP	14	ZN-38622-WHT	31		
ZN-37938-SST	14	ZN-38623-ANTH	33		
ZN-37938-WHT	14	ZN-38624-ANTH	33		
ZN-37939-ANTH	13	ZN-38627-BLK	99		
ZN-37939-BLK	13	ZN-38627-DGRY	99		
ZN-37939-COP	13	ZN-38627-WHT	99		
ZN-37939-SST	13	ZN-38628-BLK	101		
ZN-37939-WHT	13	ZN-38628-DGRY	101		
ZN-37940-ANTH	15	ZN-38628-WHT	101		
ZN-37940-BLK	15	ZN-38630-BLK	77		
ZN-37940-COP	15	ZN-38631-BLK	29		
ZN-37940-SST	15	ZN-38634-BLK	22		
ZN-37940-WHT	15	ZN-38636-ANTH	39		
ZN-38205-ANTH	59	ZN-38636-WHT	39		
ZN-38205-BLK	59	ZN-38637-BLK	23		



**Forum Lighting Solutions**

Gorse Mill, Gorse Street,  
Oldham, OL9 9RJ, UK

**t** +44 (0) 161 359 4949

**f** +44 (0) 161 628 2831

**e** [info@forumlightingsolutions.com](mailto:info@forumlightingsolutions.com)

**w** [forumlightingsolutions.com](http://forumlightingsolutions.com)



[facebook.com/forumlightingsolutions](https://facebook.com/forumlightingsolutions)



[twitter.com/forumlightingsolutions](https://twitter.com/forumlightingsolutions)



[linkedin.com/forumlightingsolutions](https://linkedin.com/forumlightingsolutions)

